

Spare Parts List



Label Printer

Hermes+ L

Made in Germany

2 Spare Parts List for the following products

2

Family	Type	
Hermes+	2L/300-2S	2L/600-2S
	2L/300-2	2L/300-3
	2L/600-2	2L/600-3
	4L/200-2	4L/200-3
	4L/300-2	4L/300-3
	4L/600-2	4L/600-3
	4.3L/200-2	4.3L/200-3
	4.3L/300-2	4.3L/300-3
	6L/200-2	6L/200-3
	6L/300-2	6L/300-3

Table of Contents

1	Covering, Control Panel.....	3
2	Electronics, Power Supply	4
3	Print Unit - 1.....	5
4	Print Unit - 2.....	6
5	Transport Unit	7
6	Motors, Gear	8
7	Belt Diagram	9
8	Pivot Arm	10
9	Label Unwinder Hermes -2/-2S	11
10	Label Unwinder Hermes -3	12
11	Liner Rewinder.....	13
12	Ribbon Hubs	14
13	Spare Parts Index.....	15
14	Packaging/Accessories.....	20

Edition: 09/2020 - Art.-Nr. 9009001

Copyright

This documentation as well as translation hereof are property of cab Produkttechnik GmbH & Co. KG.

The replication, conversion, duplication or divulgement of the whole manual or parts of it for other intentions than its original intended purpose demand the previous written authorization by cab.

Editor

Regarding questions or comments please contact cab Produkttechnik GmbH & Co. KG.

Topicality

Due to the constant further development of our products discrepancies between documentation and product can occur.

Please check www.cab.de for the latest update.

Terms and conditions

Deliveries and performances are effected under the General conditions of sale of cab.

Germany
cab Produkttechnik GmbH & Co KG
Karlsruhe
Phone +49 721 6626 0
www.cab.de

USA
cab Technology, Inc.
Chelmsford, MA
Phone +1 978 250 8321
www.cab.de/us

Taiwan
cab Technology Co., Ltd.
Taipei
Phone +886 (02) 8227 3966
www.cab.de/tw

China
cab (Shanghai) Trading Co., Ltd.
Guangzhou
Phone +86 (020) 2831 7358
www.cab.de/cn

France
cab Technologies S.à.r.l.
Niedermörs
Phone +33 388 722501
www.cab.de/fr

Mexico
cab Technology, Inc.
Juárez
Phone +52 656 682 4301
www.cab.de/es

China
cab (Shanghai) Trading Co., Ltd.
Shanghai
Phone +86 (021) 6236 3161
www.cab.de/cn

South Africa
cab Technology (Pty) Ltd.
Randburg
Phone +27 11 886 3580
www.cab.de/za


1 Covering, Control Panel

3

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
1	5902241.001	Screw DIN7984-M4x10	10			
2.1	5955545.001	Cover	1	2-2/-2S		
2.2	5961295.001	Cover	1	2-3, 4-, 6-		
3	5961073.001	Spring	1			
4	5902571.001	Screw DIN7984-M4x6	10			
5	5902582.001	Nut DIN439-M4	10			
6	5954132.001	Strip	5			
7	5959570.001	Cover	1			
8	5902565.001	Screw DIN7984-M4x10	10			
9.1	5961000.001	Cover	1	2-2/-2S		
9.2	5961070.001	Cover	1	4-2		
9.3	5961193.001	Cover	1	6-2		
10.1	5906804.001	Hinge	1	2-2, 4-2		
10.2	5906956.001	Hinge	1	6-2		

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
11	5959732.001	Threaded Plate	1			
12	5960139.001	Control Panel	1			
13	5902414.001	Screw EJOT-PT-K30x12	10			
14	5955552.001	Guide	1			
15	5540868.001	LCD Display	1			
16	5955551.001	Chassis	1			
17	5917914.001	Cable Control Panel	1			
18	5955034.001	PCB Navi Button	1			
19	5540930.001	Navigator Pad	1			
20	5955687.001	Cable USB internal	1			


Notes	2-	Hermes+2...	-2S	Hermes+...-2S
	4-	Hermes+4/4.3...	-2	Hermes+...-2
	6-	Hermes+6...	-3	Hermes+...-3

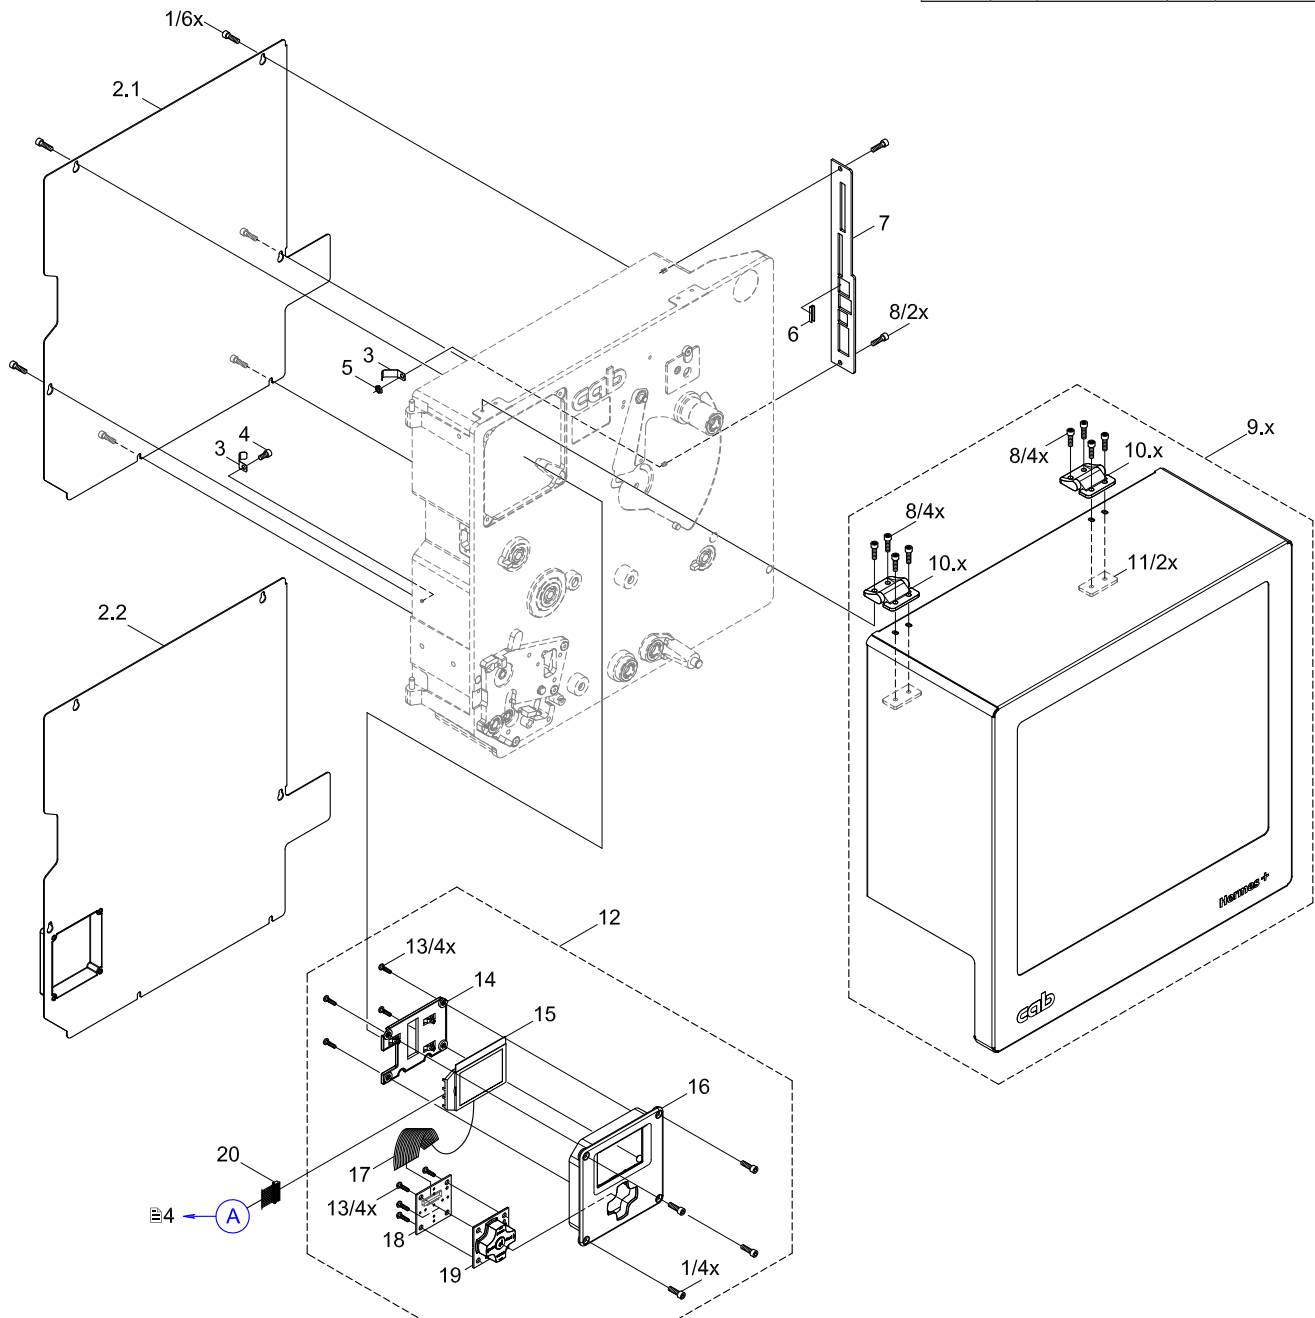

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
4	5902571.001	Screw DIN7984-M4x6	10			
8	5902565.001	Screw DIN7984-M4x10	10			
20	5955687.001	Cable USB internal	1			
21	5551118.001	CPU X2	1			
22	5955035.001	Cable Display	1			
23	5961201.001	Cable Sensors	1			
24.1	5954293.001	Cable Printhead	1	ab		
24.2	5954067.001	Cable Printhead	1	cdefg		
24.3	5954087.001	Cable Printhead	1	hi		
24.4	5954259.001	Cable Printhead	1	km		
25.1	5954292.001	Cable Printhead	1	ab		
25.2	5954066.001	Cable Printhead	1	cdefg		
25.3	5954086.001	Cable Printhead	1	hi		
25.4	5954258.001	Cable Printhead	1	km		
26	5943107.001	Cable Power Supply	1			
27.2	5946208.001	Stepper Motor	1	c		
27.3	5961306.001	Stepper Motor	1	bdefhikm		
27.4	5961379.001	Stepper Motor	1	g		
28	5952587.001	Cable Motor	1	a		
29	5906190.001	Protection Cap	10			
30	5906188.001	Protection Cap	1			


No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
31	5906189.001	Protection Cap	10			
32	5906181.001	Protection Cap	10			
33	5956220.001	Power Supply	1			
34	5955046.001	Power Input Module	1			
35	5906082.001	Ferrite	1			
36	5903033.001	Washer DIN125-A4.3	10			
37	5903011.001	Toothed Washer DIN6797-A4.3	10			
38	5956165.001	PCB USB Hub	1			
39	5956244.001	Cable Periphery	1			
40	5956247.001	Magnetic Clutch	1	R		
41	5955042.001	Cable Present Sensor	1	R		
42	5946206.001	Stepper Motor	1	R		
43	5961082.001	PCB Ribbon Saver	1	R		
44	5961074.001	Guide	1			
45	5902141.001	Bolt with Nut M3	10			
46	5955385.001	PCB Saver Sensor	1	R		
47	5961044.001	Switch	1			
48	5961675.001	PCB IO Interface	1			
49	5906187.001	Protection Cap	1			

Notes	a	Hermes+2/300-2/2S	h	Hermes+4.3/200
	b	Hermes+2/300-3	i	Hermes+4.3/300
	c	Hermes+2/600-2/2S	k	Hermes+6/200
	d	Hermes+2/600-3	m	Hermes+6/300
	e	Hermes+4/200	R	Ribbon Saver
	f	Hermes+4/300		
	g	Hermes+4/600		

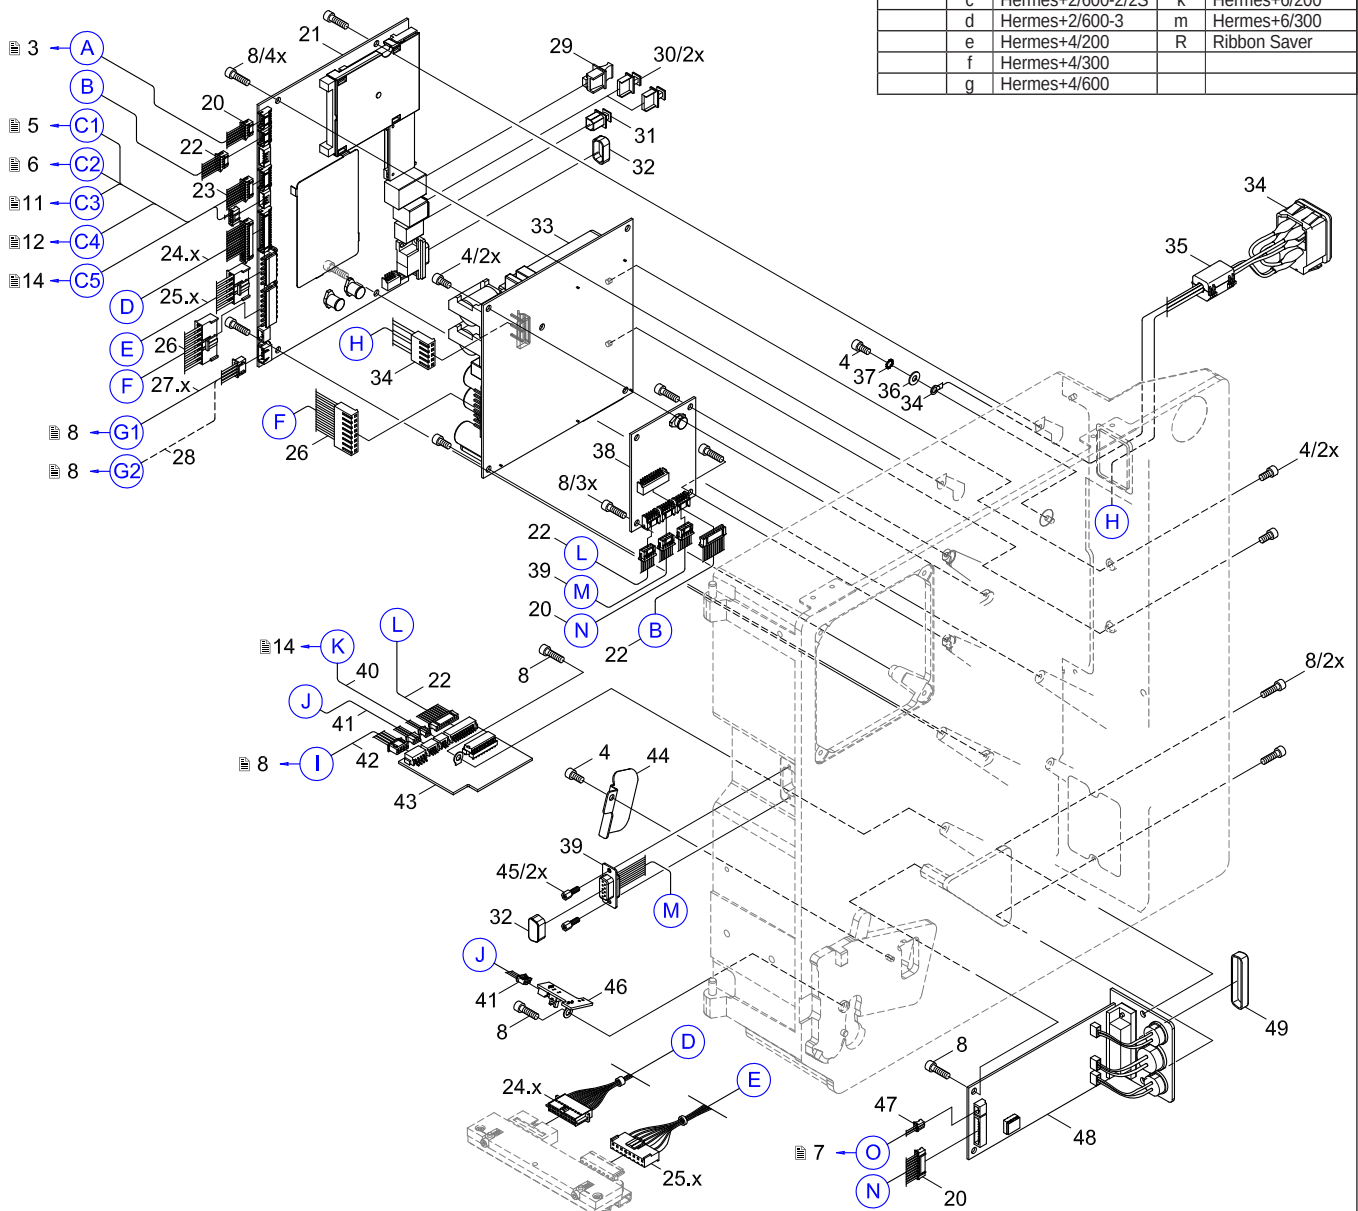

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
8	5902565.001	Screw DIN7984-M4x10	10			
23	5961201.001	Cable Sensors	1			
50	5902345.001	Screw DIN7985-M2x12	10			
51	5902572.001	Screw DIN7984 M4x16	10			
52	5955608.001	Switch Lever	1			
53	5904513.001	Set Screw DIN913-M4x5	10			
54.1	5954275.001	Roller	1	2-		
54.2	5954044.001	Roller	1	4-		
54.3	5954242.001	Roller	1	6-		
55.1	5961021.001	Profile	1	2-		
55.2	5955594.001	Profile	1	4-		
55.3	5961204.001	Profile	1	6-		
56	5902573.001	Screw DIN7991-M4x8	10			
57.1	5955633.001	Bracket	1	2-,4-		
57.2	5961582.001	Bracket	1	6-		
58	5902845.001	Screw DIN933-M3x6	10			
59	5903122.001	Washer DIN125-A4.3	10			
60.1	5954057.001	Spring	1	2-,4-		
60.2	5954239.001	Spring	1	6-		
61	5955634.001	Bracket	1			
62	5902145.001	Screw DIN923-M3x6	10			
63.1	5954284.001	Printhead Locking System	1	2-		
63.2	5954070.001	Printhead Locking System	1	4-		
63.3	5956286.001	Printhead Locking System	1	6-		
64.1	5984325.001	Roller Ribbon	1	2-		

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
64.2	5977536.001	Roller Ribbon	1	4-		
64.3	5984348.001	Roller Ribbon	1	6-		
65	5906136.001	Spring	5			
66	5954060.001	Pivot Arm	1			
67	5902011.001	Screw DIN912-M3x20	10			
68	5902817.001	Screw sim. ISO7380-M4x6	10	2-,4-		
69	5902474.001	Screw DIN912-M3x16	10	6-		
70.1	5961574.001	Antistatic Brush	1	2-		
70.2	5961575.001	Antistatic Brush	1	4-		
71.1	5954281.001	Printhead Mounting Bracket	1	2-		
71.2	5956159.001	Printhead Mounting Bracket	1	4-		
71.3	5956304.001	Printhead Mounting Bracket	1	6-		
72.1	5954105.001	Printhead 2/300	1	ab		
72.2	5958686.001	Printhead 2/600	1	cd		
72.3	5954081.001	Printhead 4/203	1	e		
72.4	5954072.001	Printhead 4/300	1	f		
72.5	5954077.001	Printhead 4/600	1	g		
72.6	5954085.001	Printhead 4.3/203	1	h		
72.7	5954089.001	Printhead 4.3/300	1	i		
72.8	5954217.001	Printhead 6/203	1	k		
72.9	5956322.001	Printhead 6/300	1	m		
73	5955596.001	Side Plate	1			
74	5903079.001	Washer DIN988-6x10x1.0	10			
75	5955714.001	Lever	1			
76	5946113.001	Allen Key	1			

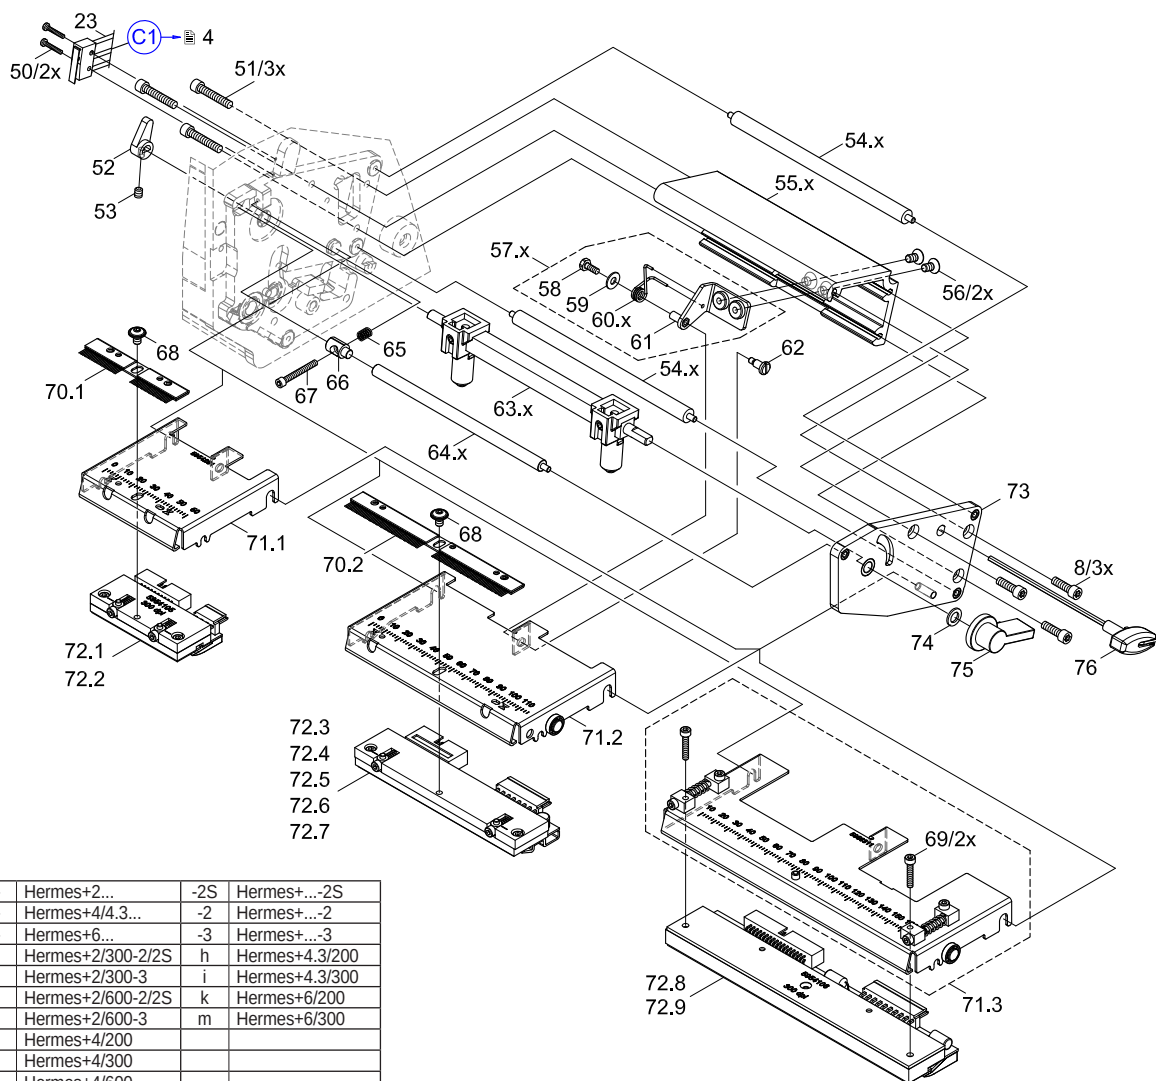


Notes	2-	Hermes+2...	-2S	Hermes+...-2S
	4-	Hermes+4/4.3...	-2	Hermes+...-2
	6-	Hermes+6...	-3	Hermes+...-3
	a	Hermes+2/300-2/2S	h	Hermes+4.3/200
	b	Hermes+2/300-3	i	Hermes+4.3/300
	c	Hermes+2/600-2/2S	k	Hermes+6/200
	d	Hermes+2/600-3	m	Hermes+6/300
	e	Hermes+4/200		
	f	Hermes+4/300		
	g	Hermes+4/600		

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
4	5902571.001	Screw DIN7984-M4x6	10			
8	5902565.001	Screw DIN7984-M4x10	10			
23	5961201.001	Cable Sensors	1			
51	5902572.001	Screw DIN7984 M4x16	10			
54.1	5954275.001	Roller	1	2-		
54.2	5954044.001	Roller	1	4-		
54.3	5954242.001	Roller	1	6-		
68	5902817.001	Screw sim. ISO7380-M4x6	10			
77	5903521.001	Snap Ring DIN471-A6	10			
78	5904556.001	Set Screw DIN913-M5x6	10			
79.1	5961023.001	Peel-off Edge	1	2-		
79.2	5956120.001	Peel-off Edge	1	4-		
79.3	5956288.001	Peel-off Edge	1	6-		
80.1	5954102.001	Drive Roller DR2	1	2-		
80.2	5954180.001	Drive Roller DR4	1	4-		
80.3	5954245.001	Drive Roller DR6	1	6-		
81.1	5961022.001	Profile	1	2-		
81.2	5955612.001	Profile	1	4-		4266

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
81.3	5961138.001	Profile	1	4-	4267	
81.4	5961205.001	Profile	1	6-		
82.1	5955606.001	Cam Axle	1	4-, R		
82.2	5961578.001	Cam Axle	1	6-, R		
83.1	5961258.001	Spindle	1	2-		
83.2	5955706.001	Spindle	1	4-		
83.3	5961227.001	Spindle	1	6-		
84	5955708.001	Guide	1			
85.1	5955614.001	Side Plate	1			4266
85.2	5961238.001	Side Plate	1		4267	
86.1	5961249.001	Label Sensor	1	2-		
86.2	5956267.001	Label Sensor	1	4-		4266
86.3	5961136.001	Label Sensor	1	4-	4267	
86.4	5961218.001	Label Sensor	1	6-		
87	5902670.001	Thumbscrew	1			4266
P06	-	Washer DIN988-6x12x...	-	Set		
PS	5961571.001	Washer Set	1			


Notes	2-	Hermes+2...
	4-	Hermes+4/4.3...
	6-	Hermes+6...
	Set	Quantity and thickness as necessary from Washer Set PS

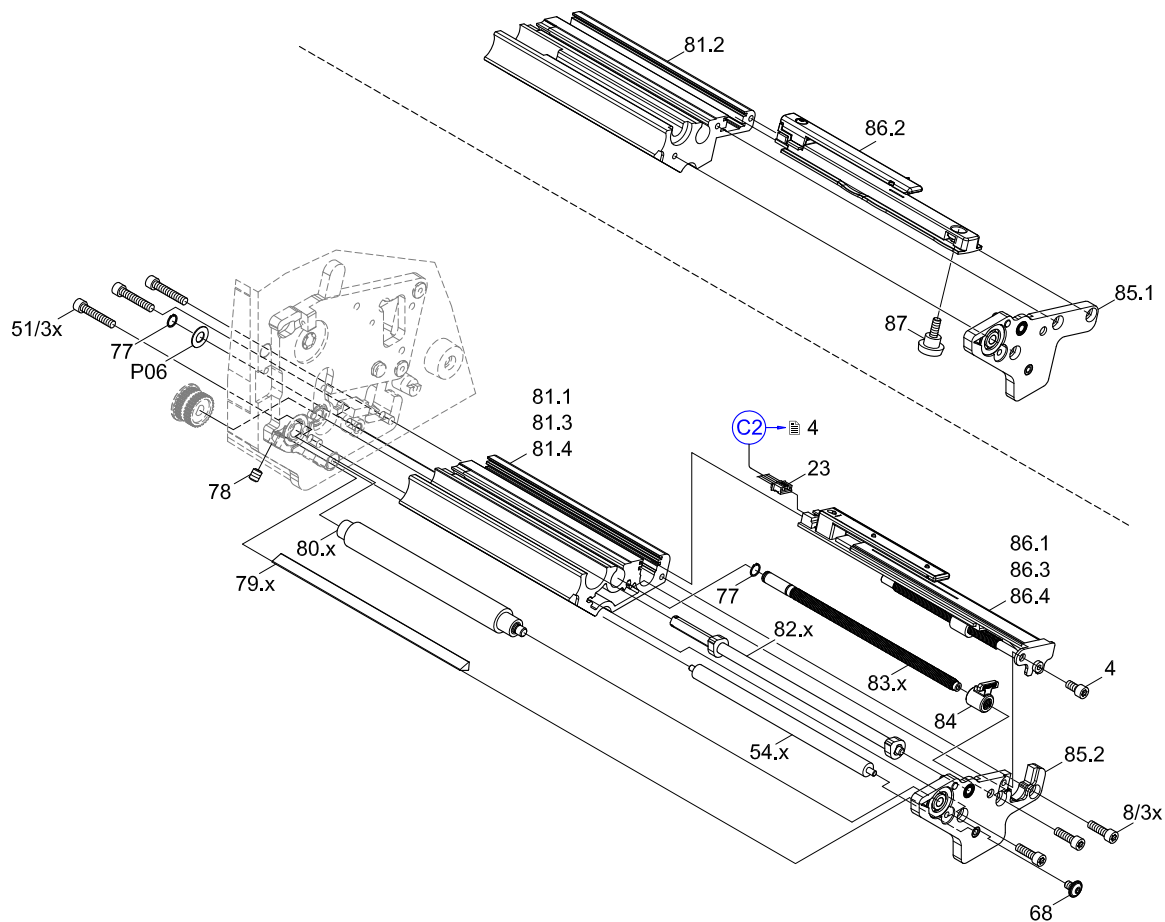

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
8	5902565.001	Screw DIN7984-M4x10	10			
47	5961044.001	Switch	1			
50	5902345.001	Screw DIN7985-M2x12	10			
77	5903521.001	Snap Ring DIN471-A6	10			
88	5955696.001	Distance Bolt M4x21	1			
89	5955623.001	Side Plate	1			
90	5902554.001	Screw DIN7991-M4x10	10			
91.1	5905017.001	Spring	1			4164
91.2	5906208.001	Spring	10		4165	
92	5903507.001	E-Ring DIN6799-3.2	10			
93	5946458.001	Axle	1			
94	5955627.001	Guide	1			
95.1	5946454.001	Link	1			4164
95.2	5961270.001	Link	1		4165	
96.1	5955626.001	Lever	1			4164
96.2	5961276.001	Lever	1		4165	
97	5904512.001	Set Screw DIN916-M4x6	10			4164
98	5961267.001	Screw	1		4165	
99.1	5955624.001	Locking System	1			4164
99.2	5961265.001	Locking System	1		4165	
100.1	5961019.001	Belt Roller	1	2-		
100.2	5961034.001	Belt Roller	1	4-		
100.3	5961226.001	Belt Roller	1	6-		
101	5903516.001	Snap Ring DIN471-8x0.8	10			
102.1	5961288.001	Shaft	1	2-		
102.2	5955619.001	Shaft	1	4-		4266
102.3	5961269.001	Shaft	1	4-	4267	
102.4	5961223.001	Shaft	1	6-		

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
103.1	5961013.001	Axle	1	2-		
103.2	5955598.001	Axle	1	4-		
103.3	5961221.001	Axle	1	6-		
104.1	5961015.001	Roller ZR2	1	2-		
104.2	5955638.001	Roller ZR4	1	4-		4266
104.3	5961298.001	Roller ZR4	1	4-	4267	
104.4	5961220.001	Roller ZR6	1	6-		
105	5902562.001	Screw DIN7984 M4x14	10			
106	5904570.001	Set Screw DIN915-M5x8	10			
107.1	5961352.001	Guide	1	2-2S		
107.2	5961024.001	Guide	1	2-2/3		
107.3	5955674.001	Guide	1	4-		
107.4	5961215.001	Guide	1	6-		
108.1	5961357.001	Roller	1	2-2S		5349
108.2	5961462.001	Roller	1	2-2S	5350	
108.3	5961018.001	Roller	1	2-2/3		5349
108.4	5961463.001	Roller	1	2-2/3	5350	
108.5	5955678.001	Roller	1	4-		5349
108.6	5961466.001	Roller	1	4-	5350	
108.7	5961212.001	Roller	1	6-		5349
108.8	5961468.001	Roller	1	6-	5350	
P06	-	Washer DIN988-6x12x...	-	Set		
PS	5961571.001	Washer Set	1			


Notes	2-	Hermes+2...	-2S	Hermes+...-2S
	4-	Hermes+4/4.3...	-2	Hermes+...-2
	6-	Hermes+6...	-3	Hermes+...-3
	Set	Quantity and thickness as necessary from Washer Set PS		

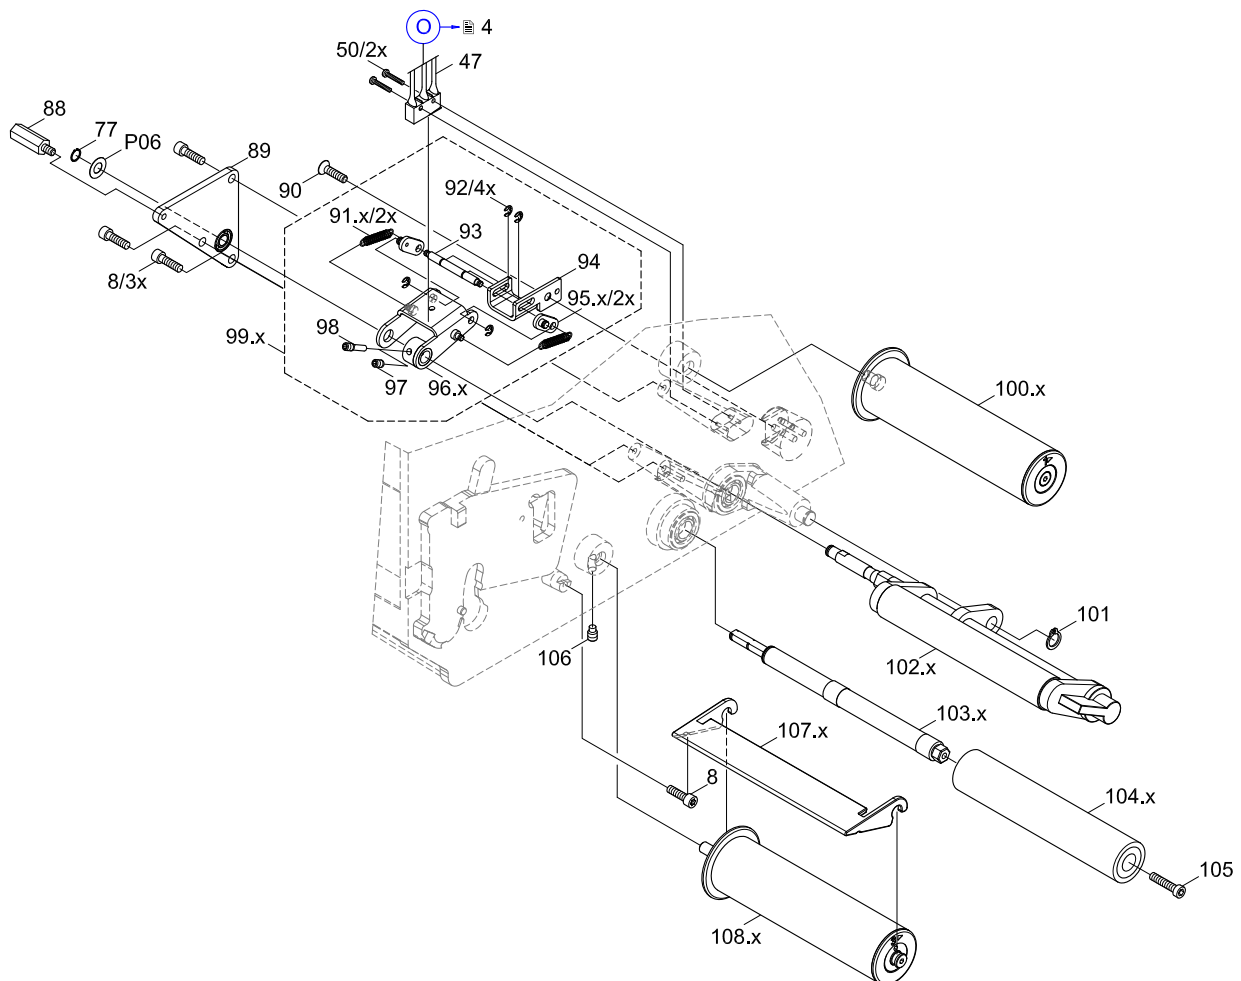

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
8	5902565.001	Screw DIN7984-M4x10	10			
27.1	5965035.001	Stepper Motor	1	a		
27.2	5946208.001	Stepper Motor	1	c		
27.3	5961306.001	Stepper Motor	1	bdefhikm		
27.4	5961379.001	Stepper Motor	1	g		
28	5952587.001	Cable Motor	1	a		
42	5946206.001	Stepper Motor	1	R		
77	5903521.001	Snap Ring DIN471-A6	10			
88	5955696.001	Distance Bolt M4x21	1			
101	5903516.001	Snap Ring DIN471-8x0.8	10			
109	5956188.001	Screw	1			
110	5956214.001	Belt Tension Bracket	1			
111	5955695.001	Distance Bolt M4x21	1			
112	5904540.001	Set Screw DIN913-M4x12	10			
113	5962347.001	Gear 48	1			
114	5953788.001	Eccentric	1			
115.1	5906901.001	Belt 434MXL 037	1	-2/-2S		
115.2	5906923.001	Belt 464MXL 037	1	-3		
116	5959913.001	Gear 30	1			
117	5956271.001	Belt Roller	1			
118	5903527.001	Snap Ring DIN471-10x1	10			
119	5955602.001	Side Plate	1			


No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
120	5906900.001	Belt 184MXL 037	1			
121	5955681.001	Shaft	1			
122	5905567.001	Belt 68MXL 037	1			
123	5955604.001	Shaft	1			
124	5905720.001	Belt 80MXL 037	1			
125	5905857.001	Belt 120MXL 037	1	R		
126	5902129.001	Screw EJOT-PT-KB22x6	10	R		
127	5955610.001	Clock Wheel	1	R		
128	5955719.001	Washer	1	R		
129	5946238.001	Gear 29	1	R		
P06	-	Washer DIN988-6x12x...	-	Set		
P08	-	Washer DIN988-8x14x...	-	Set		
P10	-	Washer DIN988-10x16x...	-	Set		
PS	5961571.001	Washer Set	1			

Notes	-2	Hermes+...-2	-2S	Hermes+...-2S
	-3	Hermes+...-3	R	Ribbon Saver
	a	Hermes+2/300-2/2S	g	Hermes+4/600
	b	Hermes+2/300-3	h	Hermes+4.3/200
	c	Hermes+2/600-2/2S	i	Hermes+4.3/300
	d	Hermes+2/600-3	k	Hermes+6/200
	e	Hermes+4/200	m	Hermes+6/300
	f	Hermes+4/300		
Set	Quantity and thickness as necessary from Washer Set PS			

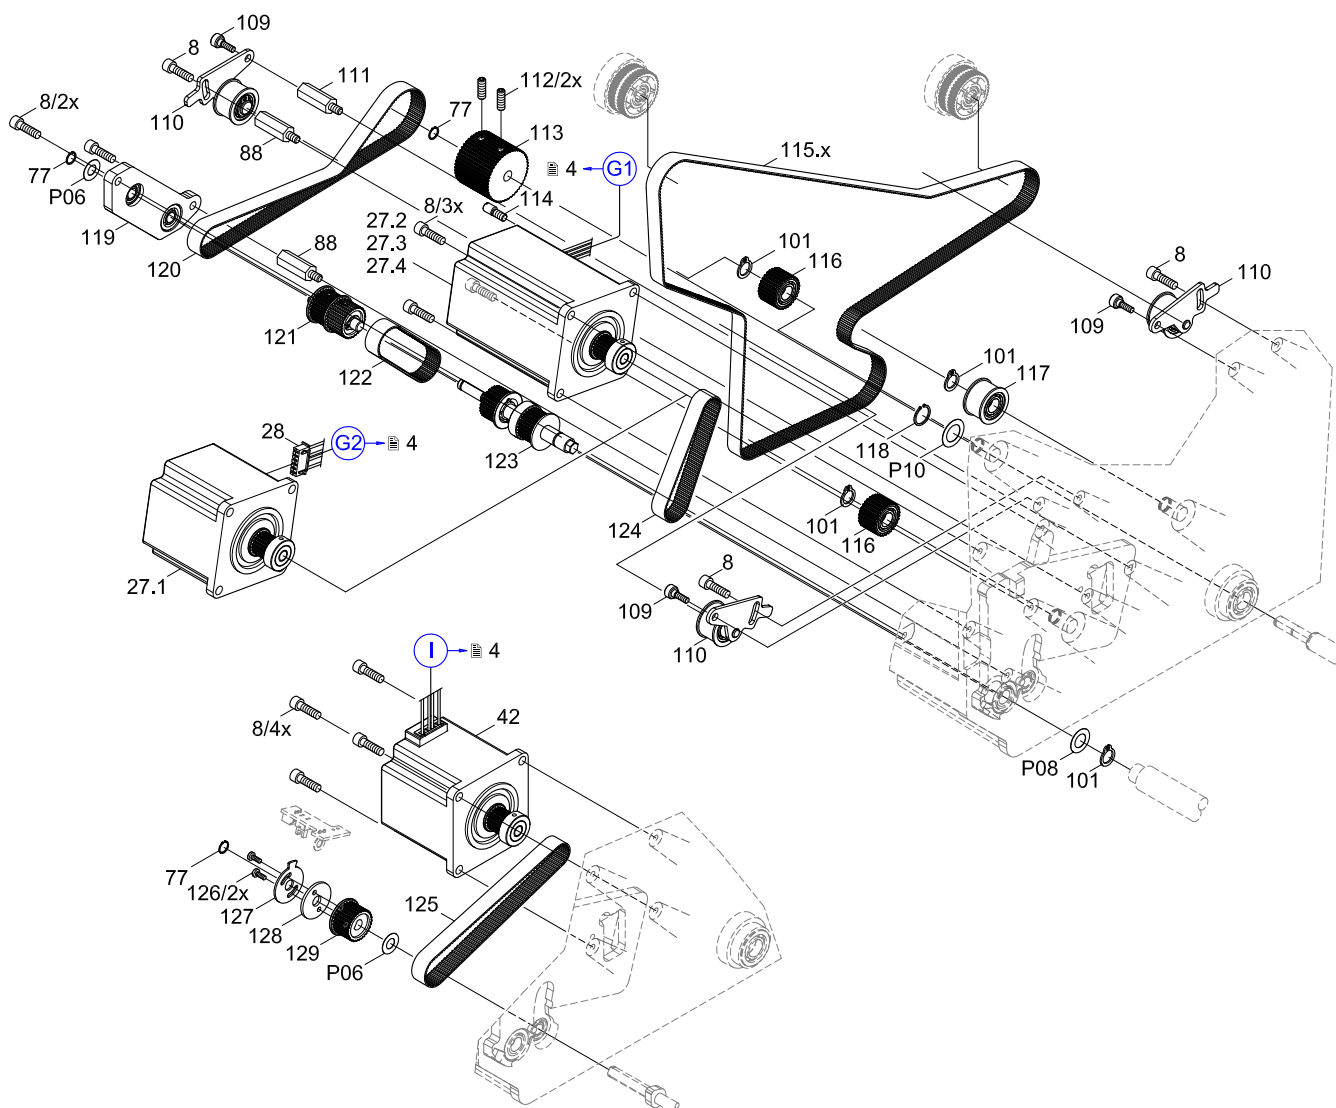


No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
115.1	5906901.001	Belt 434MXL 037	1	-2/-2S		
115.2	5906923.001	Belt 464MXL 037	1	-3		
120	5906900.001	Belt 184MXL 037	1			
122	5905567.001	Belt 68MXL 037	1			
124	5905720.001	Belt 80MXL 037	1			
125	5905857.001	Belt 120MXL 037	1	R		

Notes	-2S	Hermes+...-2S
	-2	Hermes+...-2
	-3	Hermes+...-3
	R	Ribbon Saver

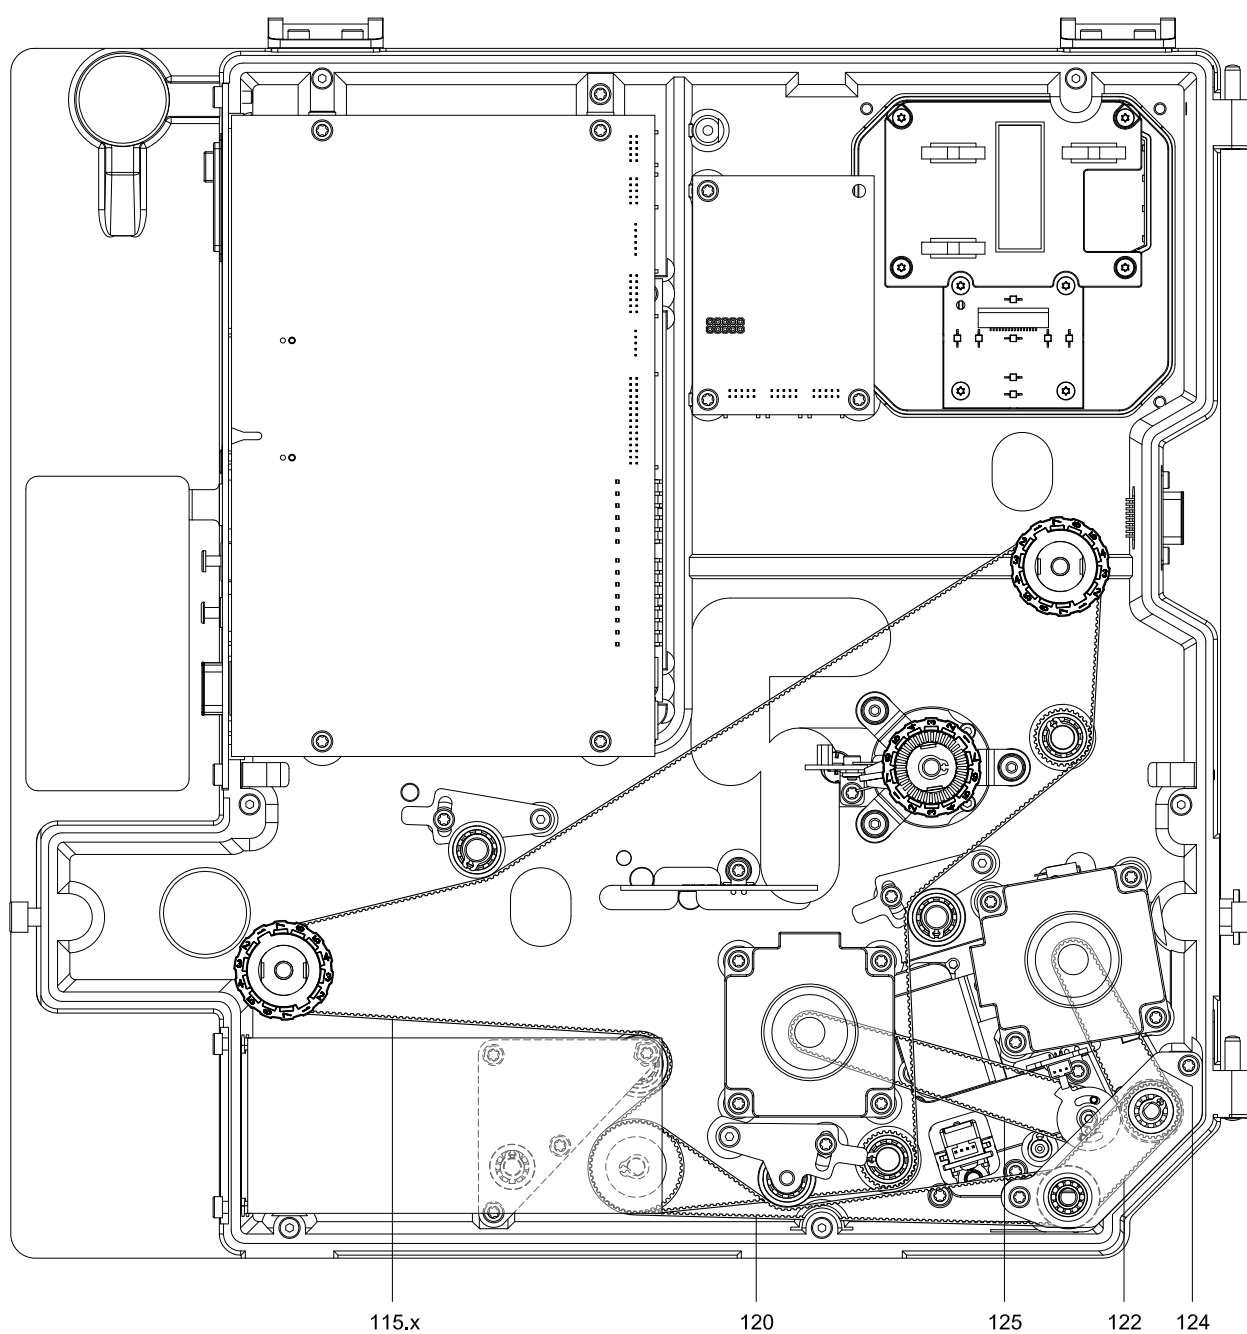

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
139.1	5955654.001	Lever	1	-2/-2S		
139.2	5961047.001	Lever	1	-3		
140.1	5961243.001	Belt Roller	1	2-		
140.2	5955597.001	Roller	1	4-		
140.3	5961210.001	Belt Roller	1	6-		
141	5902837.001	Screw DIN7984-M4x8	10			
142	5955668.001	Bolt	1			
143	5902489.001	Screw DIN7984-M4x8	10			
144.1	5906110.001	Spring	1	-2, 2-3		
144.2	5906197.001	Spring	1	4-3, 6-3		
P06	-	Washer DIN988-6x12x...	-	Set		
PS	5961571.001	Washer Set	1			


Notes	2-	Hermes+2...	-2S	Hermes+...-2S
	4-	Hermes+4/4.3...	-2	Hermes+...-2
	6-	Hermes+6...	-3	Hermes+...-3
	Set	Quantity and thickness as necessary from Washer Set PS		

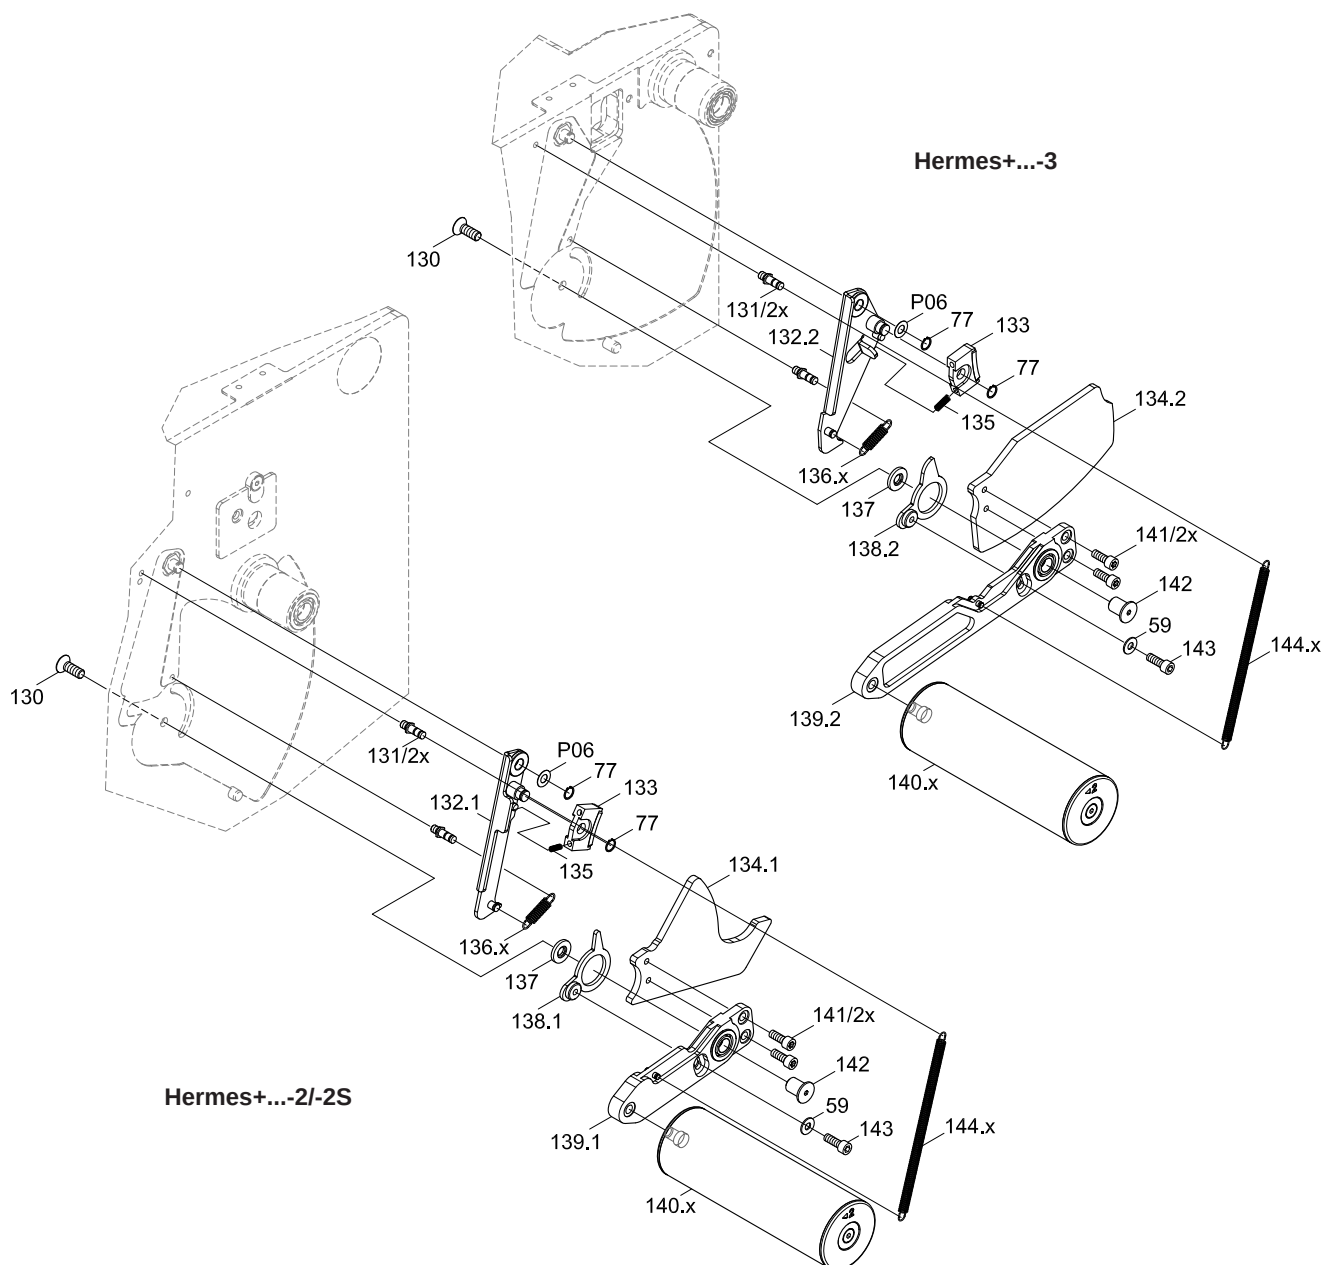

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
8	5902565.001	Screw DIN7984-M4x10	10			
23	5961201.001	Cable Sensors	1			
59	5903122.001	Washer DIN125-A4.3	10			
145	5955683.001	Plate	1	-2/-2S		
146	5954024.001	Ribbon Sensor	1			
147	5903549.001	E-Ring DIN6799-8	10			
148	5958960.001	Cone	1	-2		
149.1	5958963.001	Wall Spacer	1	-2		
150	5902839.001	Screw DIN7991-M3x6	10	-2		
151	5958969.001	Snap Ring	1	-2		
152.1	5958956.001	Shell	1	2-2		
152.2	5958954.001	Shell	1	4-		
152.3	5958988.001	Shell	3	6-		
153.1	5961362.001	Shaft	1	2-2		
153.2	5961363.001	Shaft	1	4-2		
153.3	5961364.001	Shaft	1	6-2		
154	5958955.001	Cone	1	-2		
155	5961286.001	Washer	1	-2		

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
156.1	5958991.001	Set Knob	1	-2		7189
156.2	5953822.001	Set Knob	1	-2	7190	
157	5903029.001	Lock Washer DIN127-B4	10	-2		
158.1	5961365.001	Unwinder	1	2-2		
158.2	5961366.001	Unwinder	1	4-2		
158.3	5961367.001	Unwinder	1	6-2		
159	5958977.001	Spring	1	-2		
160.1	5958976.001	Margin Stop	1	-2		
161.1	5958978.001	Margin Stop	1	-2		
162	5961396.001	Cone	1	-2S		
163	5958974.001	Retainer	1	-2S		
164	5958973.001	Shaft	1	2-2S		
165	5958975.001	Cap	1	-2S		
166	5958970.001	Unwinder	1	2-2S		
167	5537816.001	Flange	1	-2S		
P10	-	Washer DIN988-10x16x...	-	Set		
PS	5961571.001	Washer Set	1			


Notes	2-	Hermes+2...	-2S	Hermes+...-2S
	4-	Hermes+4/4.3...	-2	Hermes+...-2
	6-	Hermes+6...		
	Set	Quantity and thickness as necessary from Washer Set PS		

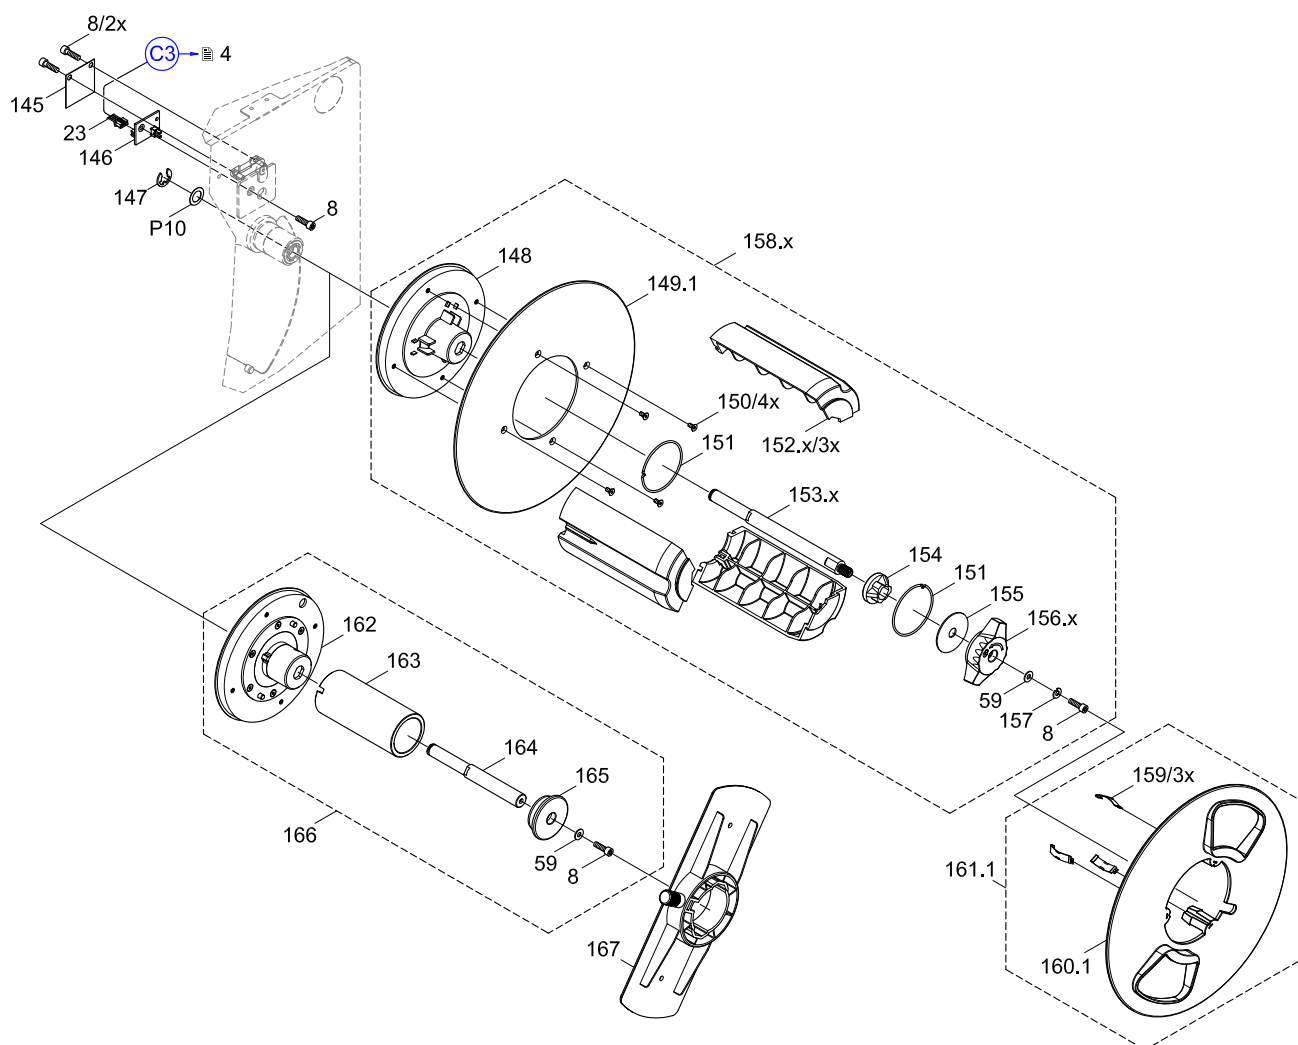

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
8	5902565.001	Screw DIN7984-M4x10	10			
23	5961201.001	Cable Sensors	1			
59	5903122.001	Washer DIN125-A4.3	10			
146	5954024.001	Ribbon Sensor	1			
147	5903549.001	E-Ring DIN6799-8	10			
148	5958960.001	Cone	1	-3		
149.2	5958966.001	Wall Spacer	1	2-3, 4-3		
149.3	5961619.001	Wall Spacer	1	6-3		
150	5902839.001	Screw DIN7991-M3x6	10	-3		
151	5958969.001	Snap Ring	1	-3		
152.1	5958956.001	Shell	1	2-3		
152.2	5958954.001	Shell	1	4-		
152.3	5958988.001	Shell	3	6-		
153.4	5961434.001	Shaft	1	2-3		
153.5	5958997.001	Shaft	1	4-3		
153.6	5961448.001	Shaft	1	6-3		
154	5958955.001	Cone	1	-3		

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
155	5961286.001	Washer	1	-3		
156.1	5958991.001	Set Knob	1	-3		7189
156.2	5953822.001	Set Knob	1	-3	7190	
157	5903029.001	Lock Washer DIN127-B4	10	-3		
158.4	5961435.001	Unwinder	1	2-3		
158.5	5958992.001	Unwinder	1	4-3		
158.6	5961618.001	Unwinder	1	6-3		
159	5958977.001	Spring	1	-3		
160.2	5958983.001	Margin Stop	1	-3		
161.2	5958984.001	Margin Stop	1	-3		
168	5961060.001	Sensor Plate	1	-3		
169	5902304.001	Screw DIN7991-M4x6	10	-3		
P10	-	Washer DIN988-10x16x...	-	Set		
PS	5961571.001	Washer Set	1			


Notes	2-	Hermes+2...	-3	Hermes+...-3
	4-	Hermes+4/4.3...		
	6-	Hermes+6...		
	Set	Quantity and thickness as necessary from Washer Set PS		

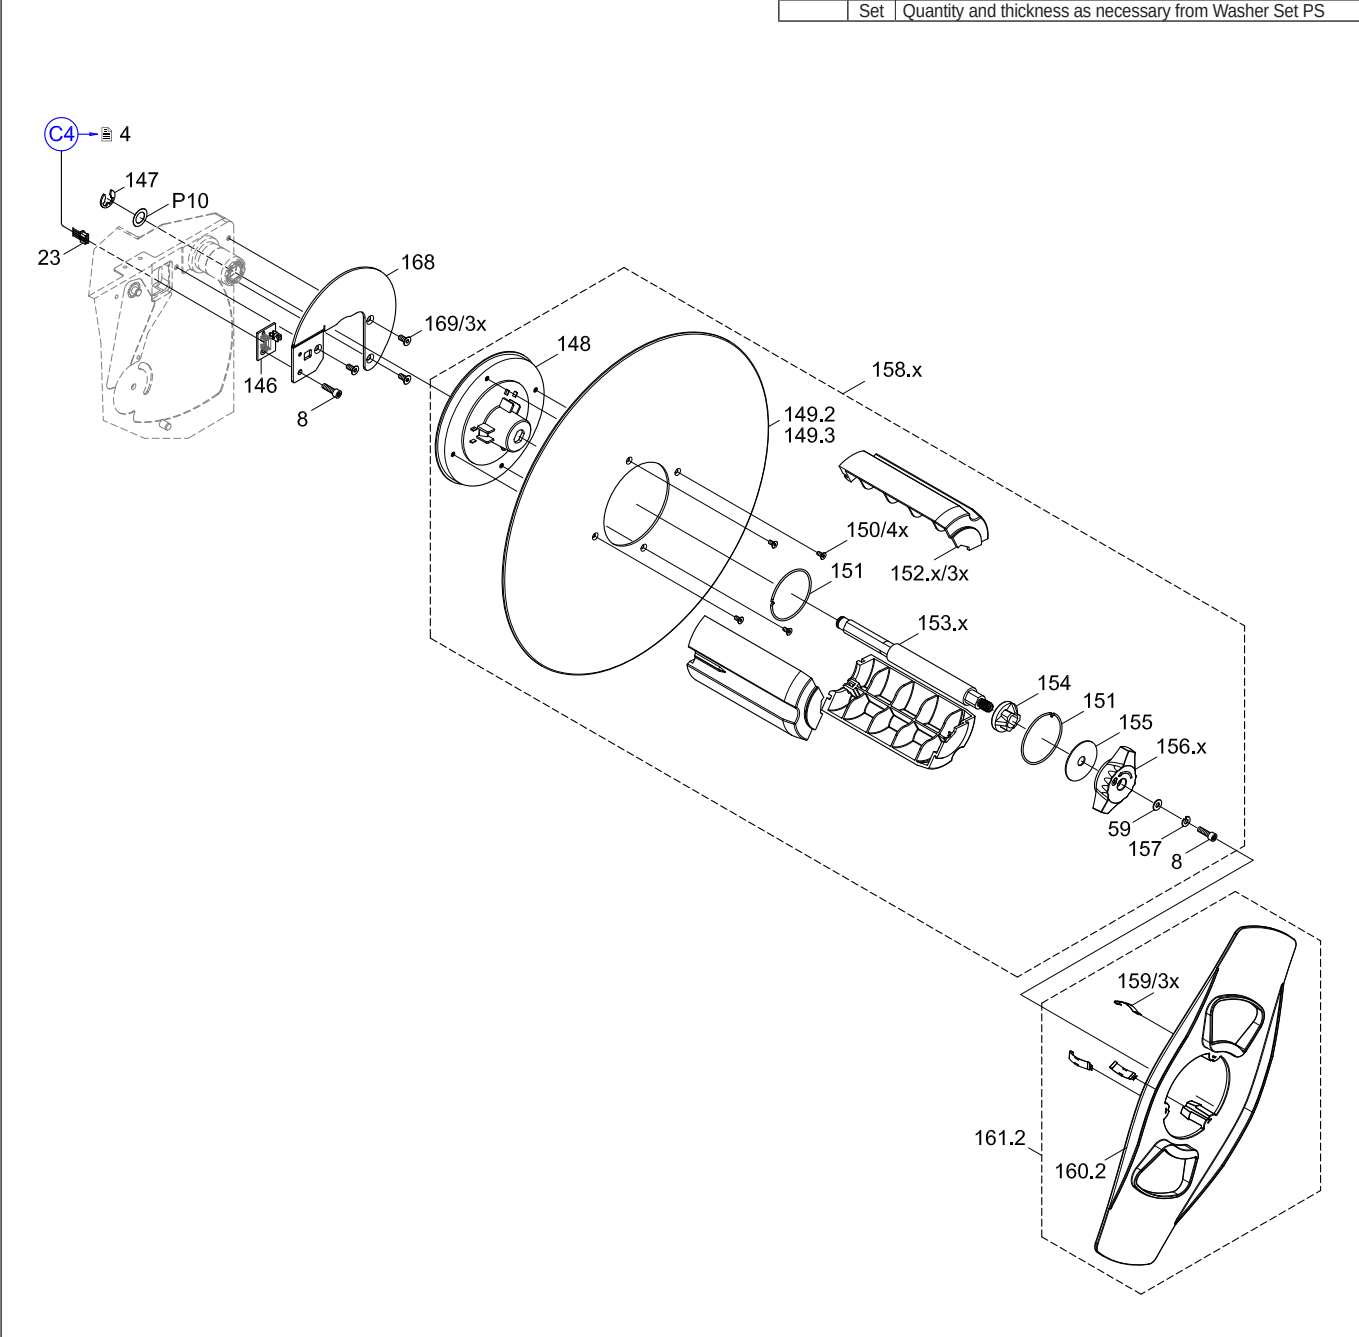

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
8	5902565.001	Screw DIN7984-M4x10	10			
59	5903122.001	Washer DIN125-A4.3	10			
77	5903521.001	Snap Ring DIN471-A6	10			
101	5903516.001	Snap Ring DIN471-8x0.8	10			
151	5958969.001	Snap Ring	1			
152.1	5958956.001	Shell	1	2-		
152.2	5958954.001	Shell	1	4-		
152.3	5958988.001	Shell	3	6-		
154	5958955.001	Cone	1			
155	5961286.001	Washer	1			
156.1	5958991.001	Set Knob	1		7189	
156.2	5953822.001	Set Knob	1		7190	
157	5903029.001	Lock Washer DIN127-B4	10			
170	5954146.001	Slipping Clutch	1			
171	5954115.001	Gear 42	1			
172	5903128.001	Washer 35x8.4x1.25	10			

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
173	5903020.001	Washer DIN988-8x14x0.5	10			
174.1	5958950.001	Cone 155	1	-2/2S		
174.2	5958951.001	Cone 210	1	-3		
175.1	5961233.001	Shaft	1	2-		
175.2	5958953.001	Shaft	1	4-		
175.3	5958946.001	Shaft	1	6-		
176.1	5961232.001	Hub	1	2-2/2S		
176.2	5958943.001	Hub	1	4-2		
176.3	5958947.001	Hub	1	6-2		
176.4	5961437.001	Hub	1	2-3		
176.5	5958944.001	Hub	1	4-3		
176.6	5961496.001	Hub	1	6-3		
P06	-	Washer DIN988-6x12x...	-	Set		
P08	-	Washer DIN988-8x14x...	-	Set		
PS	5961571.001	Washer Set	1			


Notes	2-	Hermes+2...	-2S	Hermes+...-2S
	4-	Hermes+4/4.3...	-2	Hermes+...-2
	6-	Hermes+6...	-3	Hermes+...-3
	Set	Quantity and thickness as necessary from Washer Set PS		

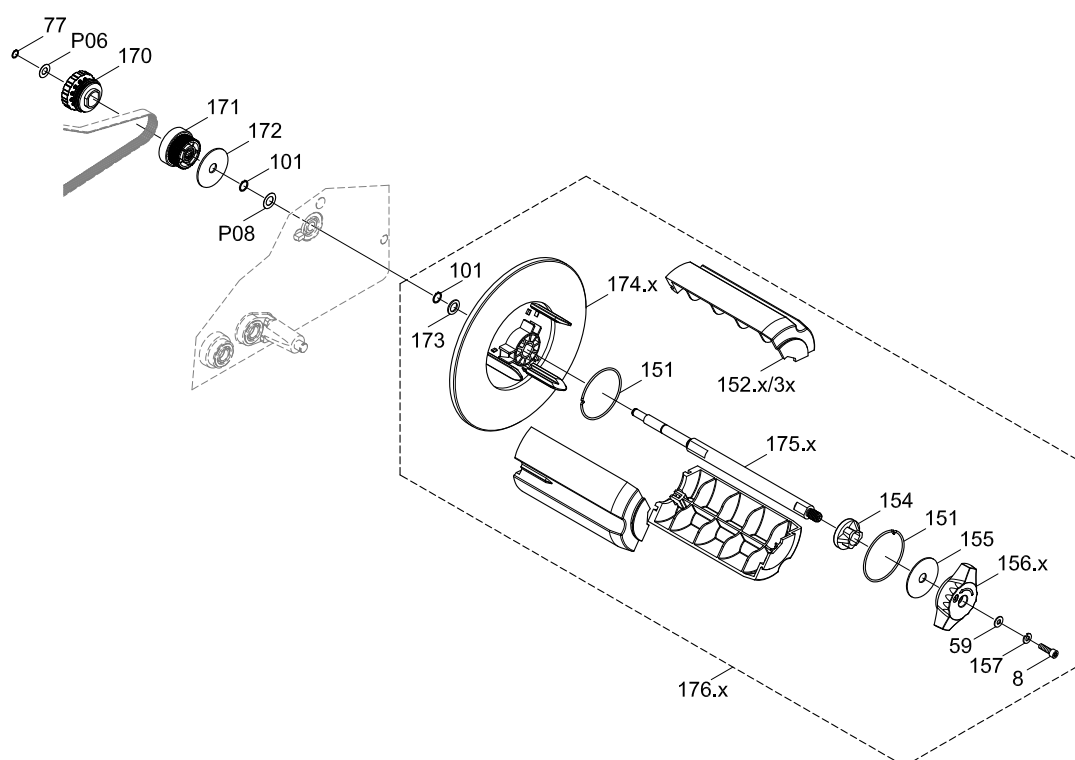

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
8	5902565.001	Screw DIN7984-M4x10	10			
23	5961201.001	Cable Sensors	1			
40	5956247.001	Magnetic Clutch	1	R		
59	5903122.001	Washer DIN125-A4.3	10			
68	5902817.001	Screw sim. ISO7380-M4x6	10			
77	5903521.001	Snap Ring DIN471-A6	10			
101	5903516.001	Snap Ring DIN471-8x0.8	10			
171	5954115.001	Gear 42	1			
172	5903128.001	Washer 35x8.4x1.25	10			
173	5903020.001	Washer DIN988-8x14x0.5	10			
177	5954114.001	Brake	1			
178	5541172.001	Pivot Arm	1			
179	5901123.001	Plastic Bushing	10			
180	5954131.001	Spring	5			
181	5903088.001	Washer DIN988-8x14x0.3	10			
182	5956141.001	Counter Bearing	1			
183	5917772.001	Armature	1	R		
184	5902144.001	Screw DIN7984-M3x5	10	R		
185	5955671.001	Ribbon Sensor	1			
186.1	5954150.001	Slipping Clutch	1	2-		
186.2	5954113.001	Slipping Clutch	1	4,-6-		
187	5961042.001	Wall Spacer	1			

No.	Part No.	Description	PU	Notes	Serial No.	
					from	to
188.1	5961660.001	Axle	1	2-		
188.2	5961661.001	Axle	1	4-		
188.3	5961662.001	Axle	1	6-		
189	5961308.001	Wall Spacer	1			
190.1	5961027.001	Axle	1	2-		
190.2	5956203.001	Axle	1	4-		
190.3	5956319.001	Axle	1	6-		
191	5954124.001	Snap Ring	10			
192.1	5954220.001	Shell	3	2-		
192.2	5954122.001	Shell	1	4-		
192.3	5954221.001	Shell	3	6-		
193	5954121.001	Cone	1			
194	5943022.001	Knurled Knob	1			
195.1	5961247.001	Ribbon Take-up Hub	1	2-		
195.2	5961041.001	Ribbon Take-up Hub	1	4-		
195.3	5961229.001	Ribbon Take-up Hub	1	6-		
196.1	5961248.001	Ribbon Supply Hub	1	2-		
196.2	5955682.001	Ribbon Supply Hub	1	4-		
196.3	5961230.001	Ribbon Supply Hub	1	6-		
P06	-	Washer DIN988-6x12x...	-	Set		
P08	-	Washer DIN988-8x14x...	-	Set		
PS	5961571.001	Washer Set	1			

Notes	2-	Hermes+2...	6-	Hermes+6...
	4-	Hermes+4...	R	Ribbon Saver
	Set	Quantity and thickness as necessary from Washer Set PS		

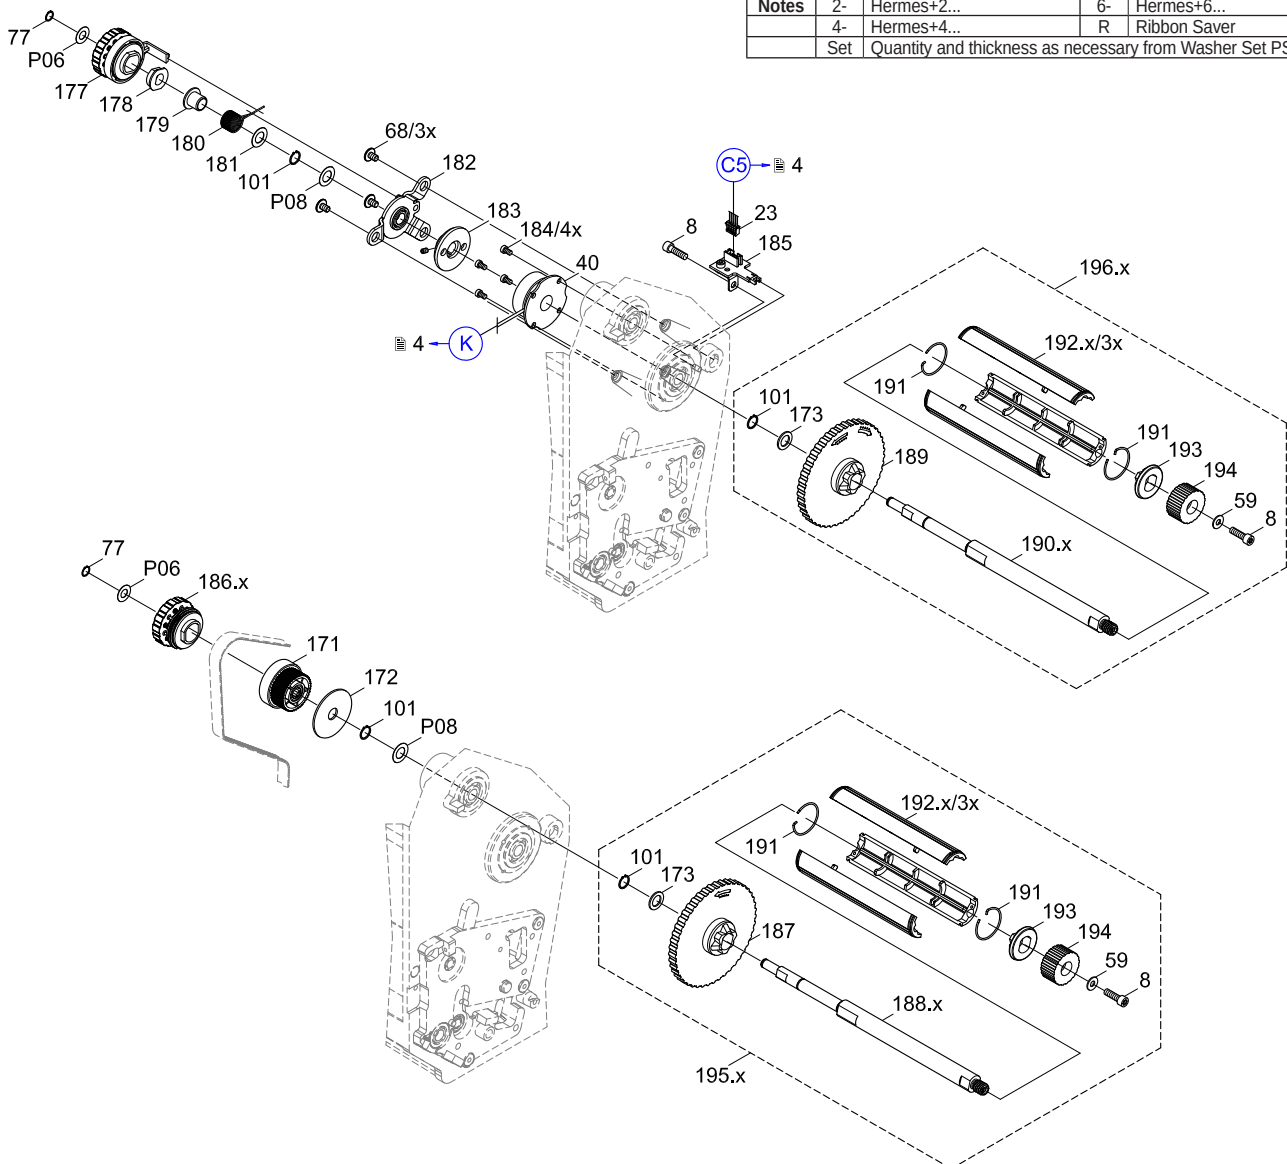

Pos.	Figure/Page											No.	Part No.	Description	PU	SPR				Notes	Serial No.			
																from	to							
1									11			167	5537816.001	Flange	1	-	-	-	-	-2S				
2	3											15	5540868.001	LCD Display	1	-	-	-	D					
3	3											19	5540930.001	Navigator Pad	1	-	-	-	-					
4											14	178	5541172.001	Pivot Arm	1	-	-	-	-					
5		4										21	5551118.001	CPU X2	1	-	B	C	D					
6											14	179	5901123.001	Plastic Bushing	10	-	-	-	D					
7			5									67	5902011.001	Screw DIN912-M3x20	10	-	-	-	-					
8						8						126	5902129.001	Screw EJOT-PT-KB22x6	10	-	-	-	-	R				
9		4										45	5902141.001	Bolt with Nut M3	10	-	-	-	-					
10											14	184	5902144.001	Screw DIN7984-M3x5	10	-	-	-	-	R				
11			5									62	5902145.001	Screw DIN923-M3x6	10	-	-	-	-					
12								10				130	5902240.001	Screw DIN7991-M5x14	10	-	-	-	-					
13	3											1	5902241.001	Screw DIN7984-M4x10	10	-	-	-	-					
14									12			169	5902304.001	Screw DIN7991-M4x6	10	-	-	-	-	-3				
15			5		7							50	5902345.001	Screw DIN7985-M2x12	10	-	-	-	-					
16	3											13	5902414.001	Screw EJOT-PT-K30x12	10	-	-	-	-					
17			5									69	5902474.001	Screw DIN912-M3x16	10	-	-	-	-	6-				
18								10				143	5902489.001	Screw DIN7984-M4x8	10	-	-	-	-					
19					7							90	5902554.001	Screw DIN7991-M4x10	10	-	-	-	-					
20					7							105	5902562.001	Screw DIN7984 M4x14	10	-	-	-	-					
21	3	4	5	6	7	8			11	12	13	14	8	5902565.001	Screw DIN7984-M4x10	10	-	-	-	-				
22	3	4		6									4	5902571.001	Screw DIN7984-M4x6	10	-	-	-	-				
23			5	6									51	5902572.001	Screw DIN7984 M4x16	10	-	-	-	-				
24			5										56	5902573.001	Screw DIN7991-M4x8	10	-	-	-	-				
25	3												5	5902582.001	Nut DIN439-M4	10	-	-	-	-				
26				6									87	5902670.001	Thumbscrew	1	-	-	-	-			4266	
27			5	6								14	68	5902817.001	Screw sim. ISO7380-M4x6	10	-	-	-	-	2,-4-			
28								10					141	5902837.001	Screw DIN7984-M4x8	10	-	-	-	-				
29									11	12			150	5902839.001	Screw DIN7991-M3x6	10	-	-	-	-	-2			
30			5										58	5902845.001	Screw DIN933-M3x6	10	-	-	-	-				
31		4											37	5903011.001	Toothed Washer DIN6797-A4.3	10	-	-	-	-				
32											13	14	173	5903020.001	Washer DIN988-8x14x0.5	10	-	-	-	-				
33									11	12	13		157	5903029.001	Lock Washer DIN127-B4	10	-	-	-	-	-2			
34		4											36	5903033.001	Washer DIN125-A4.3	10	-	-	-	-				
35			5										74	5903079.001	Washer DIN988-6x10x1.0	10	-	-	-	-				
36												14	181	5903088.001	Washer DIN988-8x14x0.3	10	-	-	-	-				
37			5					10	11	12	13	14	59	5903122.001	Washer DIN125-A4.3	10	-	-	-	-				
38												13	14	172	5903128.001	Washer 35x8.4x1.25	10	-	-	-	-			
39					7								92	5903507.001	E-Ring DIN6799-3.2	10	-	-	-	-				
40					7	8					13	14	101	5903516.001	Snap Ring DIN471-8x0.8	10	-	-	-	-				
41				6	7	8		10			13	14	77	5903521.001	Snap Ring DIN471-A6	10	-	-	-	-				
42						8							118	5903527.001	Snap Ring DIN471-10x1	10	-	-	-	-				
43									11	12			147	5903549.001	E-Ring DIN6799-8	10	-	-	-	-				
44					7								97	5904512.001	Set Screw DIN916-M4x6	10	-	-	-	-			4164	
45			5										53	5904513.001	Set Screw DIN913-M4x5	10	-	-	-	-				
46						8							112	5904540.001	Set Screw DIN913-M4x12	10	-	-	-	-				
47				6									78	5904556.001	Set Screw DIN913-M5x6	10	-	-	-	-				
48					7								106	5904570.001	Set Screw DIN915-M5x8	10	-	-	-	-				
49								10					136.2	5905008.001	Spring	5	-	-	-	-	4-3, 6-3			
50					7								91.1	5905017.001	Spring	1	-	-	-	-			4164	
51						8	9						122	5905567.001	Belt 68MXL 037	1	-	-	C	D				
52						8	9						124	5905720.001	Belt 80MXL 037	1	-	-	C	D				
53						8	9						125	5905857.001	Belt 120MXL 037	1	-	-	C	D	R			
54		4											35	5906082.001	Ferrite	1	-	-	-	-				
55									10				144.1	5906110.001	Spring	1	-	-	-	-	-2, 2-3			
56								10					135	5906132.001	Spring	10	-	-	-	-				
57			5										65	5906136.001	Spring	5	-	-	-	-				
58		4											32	5906181.001	Protection Cap	10	-	-	-	-				
59		4											49	5906187.001	Protection Cap	1	-	-	-	-				
60		4											30	5906188.001	Protection Cap	1	-	-	-	-				

PU Package unit

SPR Spare part recommendation

2- Hermes+2...
 4- Hermes+4/4.3...
 6- Hermes+6...
 -2S Hermes+...-2S
 -2 Hermes+...-2
 -3 Hermes+...-3
 R Ribbon Saver

a Hermes+2/300-2/2S
 b Hermes+2/300-3
 c Hermes+2/600-2/2S
 d Hermes+2/600-3
 e Hermes+4/200
 f Hermes+4/300
 g Hermes+4/600

h Hermes+4.3/200
 i Hermes+4.3/300
 k Hermes+6/200
 m Hermes+6/300

A wearing parts and accessories
 B recommended spare parts for quick repair
 C recommended spare parts for distributors
 D recommended spare parts for central stores

Pos.	Figure/Page										No.	Part No.	Description	PU	SPR					Notes	Serial No.		
															from	to							
61		4									31	5906189.001	Protection Cap	10	-	-	-	-					
62		4									29	5906190.001	Protection Cap	10	-	-	-	-					
63								10			136.1	5906191.001	Spring	1	-	-	-	-	-2, 2-3				
64								10			144.2	5906197.001	Spring	1	-	-	-	-	4-3, 6-3				
65					7						91.2	5906208.001	Spring	10	-	-	-	-		4165			
66	3										10.1	5906804.001	Hinge	1	-	-	-	-	2-2, 4-2				
67						8	9				120	5906900.001	Belt 184MXL 037	1	-	-	-	C D					
68						8	9				115.1	5906901.001	Belt 434MXL 037	1	-	-	-	C D	-2/-2S				
69						8	9				115.2	5906923.001	Belt 464MXL 037	1	-	-	-	C D	-3				
70	3										10.2	5906956.001	Hinge	1	-	-	-	-	6-2				
71										14	183	5917772.001	Armature	1	-	-	-	-	R				
72	3										17	5917914.001	Cable Control Panel	1	-	-	-	-	D				
73										14	194	5943022.001	Knurled Knob	1	-	-	-	-	D				
74		4									26	5943107.001	Cable Power Supply	1	-	-	-	-	C D				
75			5								76	5946113.001	Allen Key	1	-	-	-	-	-				
76		4					8				42	5946206.001	Stepper Motor	1	-	-	-	-	C D	R			
77		4					8				27.2	5946208.001	Stepper Motor	1	-	-	-	-	C D	c			
78							8				129	5946238.001	Gear 29	1	-	-	-	-	-	R			
79							7				95.1	5946454.001	Link	1	-	-	-	-	-			4164	
80							7				93	5946458.001	Axle	1	-	-	-	-	-				
81		4					8				28	5952587.001	Cable Motor	1	-	-	-	-	-	D	a		
82							8				114	5953788.001	Eccentric	1	-	-	-	-	-				
83									11	12	13	156.2	5953822.001	Set Knob	1	-	-	-	-	-	-2	7190	
84									11	12		146	5954024.001	Ribbon Sensor	1	-	-	-	-	C D			
85			5	6							54.2	5954044.001	Roller	1	-	-	-	-	-	4-			
86			5								60.1	5954057.001	Spring	1	-	-	-	-	-	2-, 4-			
87			5								66	5954060.001	Pivot Arm	1	-	-	-	-	-				
88		4									25.2	5954066.001	Cable Printhead	1	-	-	-	-	C D	cdefg			
89		4									24.2	5954067.001	Cable Printhead	1	-	-	-	-	C D	cdefg			
90			5								63.2	5954070.001	Printhead Locking System	1	-	-	-	-	-	4-			
91			5								72.4	5954072.001	Printhead 4/300	1	A	B	C	D	D	f			
92			5								72.5	5954077.001	Printhead 4/600	1	A	B	C	D	D	g			
93			5								72.3	5954081.001	Printhead 4/203	1	A	B	C	D	D	e			
94			5								72.6	5954085.001	Printhead 4.3/203	1	A	B	C	D	D	h			
95		4									25.3	5954086.001	Cable Printhead	1	-	-	-	-	C D	hi			
96		4									24.3	5954087.001	Cable Printhead	1	-	-	-	-	C D	hi			
97			5								72.7	5954089.001	Printhead 4.3/300	1	A	B	C	D	D	i			
98				6							80.1	5954102.001	Drive Roller DR2	1	A	B	C	D	D	2-			
99			5								72.1	5954105.001	Printhead 2/300	1	A	B	C	D	D	ab			
100										14	186.2	5954113.001	Slipping Clutch	1	-	-	B	C	D	4-, 6-			
101										14	177	5954114.001	Brake	1	-	-	B	C	D	D			
102										13	14	171	5954115.001	Gear 42	1	-	-	-	-	-			
103											14	193	5954121.001	Cone	1	-	-	-	-	D			
104											14	192.2	5954122.001	Shell	1	-	-	-	-	D	4-		
105											14	191	5954124.001	Snap Ring	10	-	-	B	C	D	D		
106											14	180	5954131.001	Spring	5	-	-	-	-	-			
107	3										6	5954132.001	Strip	5	-	-	-	-	-				
108										13	170	5954146.001	Slipping Clutch	1	-	-	B	C	D	D			
109										14	186.1	5954150.001	Slipping Clutch	1	-	-	B	C	D	D	2-		
110				6							80.2	5954180.001	Drive Roller DR4	1	A	B	C	D	D	4-			
111			5								72.8	5954217.001	Printhead 6/203	1	A	B	C	D	D	k			
112										14	192.1	5954220.001	Shell	3	-	-	-	-	D	2-			
113										14	192.3	5954221.001	Shell	3	-	-	-	-	D	6-			
114			5								60.2	5954239.001	Spring	1	-	-	-	-	-	6-			
115			5	6							54.3	5954242.001	Roller	1	-	-	-	-	-	6-			
116				6							80.3	5954245.001	Drive Roller DR6	1	A	B	C	D	D	6-			
117		4									25.4	5954258.001	Cable Printhead	1	-	-	-	-	C D	km			
118		4									24.4	5954259.001	Cable Printhead	1	-	-	-	-	C D	km			
119			5	6							54.1	5954275.001	Roller	1	-	-	-	-	-	2-			
120			5								71.1	5954281.001	Printhead Mounting Bracket	1	-	-	-	-	-	2-			

PU Package unit

2- Hermes+2...
4- Hermes+4/4.3...
6- Hermes+6...
-2S Hermes+...-2S
-2 Hermes+...-2
-3 Hermes+...-3
R Ribbon Saver

a Hermes+2/300-2/2S
b Hermes+2/300-3
c Hermes+2/600-2/2S
d Hermes+2/600-3
e Hermes+4/200
f Hermes+4/300
g Hermes+4/600

h Hermes+4.3/200
i Hermes+4.3/300
k Hermes+6/200
m Hermes+6/300

SPR Spare part recommendation

A wearing parts and accessories
B recommended spare parts for quick repair
C recommended spare parts for distributors
D recommended spare parts for central stores

Pos.	Figure/Page											No.	Part No.	Description	PU	SPR					Notes	Serial No.	
																						from	to
121			5								63.1	5954284.001	Printhead Locking System	1	-	-	-	-	-	2-			
122		4									25.1	5954292.001	Cable Printhead	1	-	-	-	C	D	ab			
123		4									24.1	5954293.001	Cable Printhead	1	-	-	-	C	D	ab			
124	3										18	5955034.001	PCB Navi Button	1	-	-	-	C	D				
125		4									22	5955035.001	Cable Display	1	-	-	-	C	D				
126		4									41	5955042.001	Cable Present Sensor	1	-	-	-	-	D	R			
127		4									34	5955046.001	Power Input Module	1	-	-	-	-	-				
128		4									46	5955385.001	PCB Saver Sensor	1	-	-	-	C	D	R			
129	3										2.1	5955545.001	Cover	1	-	-	-	-	-	2-2/-2S			
130	3										16	5955551.001	Chassis	1	-	-	-	-	-				
131	3										14	5955552.001	Guide	1	-	-	-	-	-				
132			5								55.2	5955594.001	Profile	1	-	-	-	-	-	4-			
133			5								73	5955596.001	Side Plate	1	-	-	-	-	-				
134								10			140.2	5955597.001	Roller	1	-	-	-	-	-	4-			
135					7						103.2	5955598.001	Axle	1	-	-	-	-	-	4-			
136						8					119	5955602.001	Side Plate	1	-	-	-	-	-				
137						8					123	5955604.001	Shaft	1	-	-	-	-	-				
138				6							82.1	5955606.001	Cam Axle	1	-	-	-	-	D	4-, R			
139			5								52	5955608.001	Switch Lever	1	-	-	-	-	-				
140						8					127	5955610.001	Clock Wheel	1	-	-	-	-	-	R			
141				6							81.2	5955612.001	Profile	1	-	-	-	-	-	4-		4266	
142				6							85.1	5955614.001	Side Plate	1	-	-	-	-	-			4266	
143					7						102.2	5955619.001	Shaft	1	-	-	-	-	-	4-		4266	
144					7						89	5955623.001	Side Plate	1	-	-	-	-	-				
145					7						99.1	5955624.001	Locking System	1	-	-	-	-	-			4164	
146					7						96.1	5955626.001	Lever	1	-	-	-	-	-			4164	
147					7						94	5955627.001	Guide	1	-	-	-	-	-				
148			5								57.1	5955633.001	Bracket	1	-	-	-	-	-	2-,4-			
149			5								61	5955634.001	Bracket	1	-	-	-	-	-				
150					7						104.2	5955638.001	Roller ZR4	1	-	-	-	C	D	4-		4266	
151								10			139.1	5955654.001	Lever	1	-	-	-	-	-	-2/-2S			
152								10			138.1	5955661.001	Pivot Arm	1	-	-	-	-	-	-2/-2S			
153								10			131	5955665.001	Spring Bolt	1	-	-	-	-	-				
154								10			142	5955668.001	Bolt	1	-	-	-	-	-				
155										14	185	5955671.001	Ribbon Sensor	1	-	-	-	-	-				
156					7						107.3	5955674.001	Guide	1	-	-	-	-	-	4-			
157								10			137	5955676.001	Ring	1	-	-	-	-	-				
158					7						108.5	5955678.001	Roller	1	-	-	-	-	-	4-		5349	
159						8					121	5955681.001	Shaft	1	-	-	-	-	-				
160										14	196.2	5955682.001	Ribbon Supply Hub	1	-	-	-	-	-	4-			
161								11			145	5955683.001	Plate	1	-	-	-	-	-	-2/-2S			
162	3	4									20	5955687.001	Cable USB internal	1	-	-	-	-	D				
163						8					111	5955695.001	Distance Bolt M4x21	1	-	-	-	-	-				
164						7	8				88	5955696.001	Distance Bolt M4x21	1	-	-	-	-	-				
165				6							83.2	5955706.001	Spindle	1	-	-	-	-	-	4-			
166				6							84	5955708.001	Guide	1	-	-	-	-	-				
167			5								75	5955714.001	Lever	1	-	-	-	-	-				
168						8					128	5955719.001	Washer	1	-	-	-	-	-	R			
169								10			134.1	5955746.001	Pendulum	1	-	-	-	-	-	-2/-2S			
170				6							79.2	5956120.001	Peel-off Edge	1	-	-	-	-	-	4-			
171										14	182	5956141.001	Counter Bearing	1	-	-	-	-	-				
172			5								71.2	5956159.001	Printhead Mounting Bracket	1	-	-	-	-	-	4-			
173		4									38	5956165.001	PCB USB Hub	1	-	-	-	C	D				
174						8					109	5956188.001	Screw	1	-	-	-	-	-				
175										14	190.2	5956203.001	Axle	1	-	-	-	-	-	4-			
176						8					110	5956214.001	Belt Tension Bracket	1	-	-	-	-	-				
177		4									33	5956220.001	Power Supply	1	-	-	B	C	D				
178		4									39	5956244.001	Cable Periphery	1	-	-	-	-	D				
179		4								14	40	5956247.001	Magnetic Clutch	1	-	-	-	C	D	R			
180				6							86.2	5956267.001	Label Sensor	1	-	-	-	C	D	4-		4266	

PU Package unit

2- Hermes+2...
4- Hermes+4/4.3...
6- Hermes+6...
-2S Hermes+...-2S
-2 Hermes+...-2
-3 Hermes+...-3
R Ribbon Saver

a Hermes+2/300-2/2S
b Hermes+2/300-3
c Hermes+2/600-2/2S
d Hermes+2/600-3
e Hermes+4/200
f Hermes+4/300
g Hermes+4/600

h Hermes+4.3/200
i Hermes+4.3/300
k Hermes+6/200
m Hermes+6/300

SPR Spare part recommendation

A wearing parts and accessories
B recommended spare parts for quick repair
C recommended spare parts for distributors
D recommended spare parts for central stores

Pos.	Figure/Page												No.	Part No.	Description	PU	SPR					Notes	Serial No.	
																	from	to						
181					8							117	5956271.001	Belt Roller	1	-	-	-	-					
182			5									63.3	5956286.001	Printhead Locking System	1	-	-	-	-	6-				
183				6								79.3	5956288.001	Peel-off Edge	1	-	-	-	-	6-				
184			5									71.3	5956304.001	Printhead Mounting Bracket	1	-	-	-	-	6-				
185											14	190.3	5956319.001	Axle	1	-	-	-	-	6-				
186			5									72.9	5956322.001	Printhead 6/300	1	A	B	C	D	m				
187			5									72.2	5958686.001	Printhead 2/600	1	A	B	C	D	cd				
188										13		176.2	5958943.001	Hub	1	-	-	-	-	4-2				
189										13		176.5	5958944.001	Hub	1	-	-	-	-	4-3				
190										13		175.3	5958946.001	Shaft	1	-	-	-	-	6-				
191										13		176.3	5958947.001	Hub	1	-	-	-	-	6-2				
192										13		174.1	5958950.001	Cone 155	1	-	-	-	-	-2/2S				
193										13		174.2	5958951.001	Cone 210	1	-	-	-	-	-3				
194										13		175.2	5958953.001	Shaft	1	-	-	-	-	4-				
195								11	12	13		152.2	5958954.001	Shell	1	-	-	-	-	4-				
196								11	12	13		154	5958955.001	Cone	1	-	-	-	-	-2				
197								11	12	13		152.1	5958956.001	Shell	1	-	-	-	-	2-2				
198								11	12			148	5958960.001	Cone	1	-	-	-	-	-2				
199								11				149.1	5958963.001	Wall Spacer	1	-	-	-	-	-2				
200									12			149.2	5958966.001	Wall Spacer	1	-	-	-	-	2-3, 4-3				
201								11	12	13		151	5958969.001	Snap Ring	1	-	B	C	D	-2				
202								11				166	5958970.001	Unwinder	1	-	-	-	-	2-2S				
203								11				164	5958973.001	Shaft	1	-	-	-	-	2-2S				
204								11				163	5958974.001	Retainer	1	-	-	-	-	-2S				
205								11				165	5958975.001	Cap	1	-	-	-	-	-2S				
206								11				160.1	5958976.001	Margin Stop	1	-	-	-	-	-2				
207								11	12			159	5958977.001	Spring	1	-	-	-	-	-2				
208								11				161.1	5958978.001	Margin Stop	1	-	-	-	-	-2				
209									12			160.2	5958983.001	Margin Stop	1	-	-	-	-	-3				
210									12			161.2	5958984.001	Margin Stop	1	-	-	-	-	-3				
211								11	12	13		152.3	5958988.001	Shell	3	-	-	-	-	6-				
212								11	12	13		156.1	5958991.001	Set Knob	1	-	-	-	-	-2		7189		
213									12			158.5	5958992.001	Unwinder	1	-	-	-	-	4-3				
214									12			153.5	5958997.001	Shaft	1	-	-	-	-	4-3				
215	3											7	5959570.001	Cover	1	-	-	-	-					
216	3											11	5959732.001	Threaded Plate	1	-	-	-	-					
217					8							116	5959913.001	Gear 30	1	-	-	-	-					
218	3											12	5960139.001	Control Panel	1	-	-	-	C	D				
219	3											9.1	5961000.001	Cover	1	-	-	-	-	2-2/-2S				
220							10					133	5961009.001	Brake Plate	1	-	-	-	C	D				
221					7							103.1	5961013.001	Axle	1	-	-	-	-	2-				
222					7							104.1	5961015.001	Roller ZR2	1	-	-	-	C	D	2-			
223					7							108.3	5961018.001	Roller	1	-	-	-	-	2-2/3		5349		
224					7							100.1	5961019.001	Belt Roller	1	-	-	-	-	2-				
225			5									55.1	5961021.001	Profile	1	-	-	-	-	2-				
226				6								81.1	5961022.001	Profile	1	-	-	-	-	2-				
227				6								79.1	5961023.001	Peel-off Edge	1	-	-	-	-	2-				
228				7								107.2	5961024.001	Guide	1	-	-	-	-	2-2/3				
229										14		190.1	5961027.001	Axle	1	-	-	-	-	2-				
230							10					132.1	5961029.001	Brake Lever	1	-	-	-	-	-2/-2S				
231					7							100.2	5961034.001	Belt Roller	1	-	-	-	-	4-				
232										14		195.2	5961041.001	Ribbon Take-up Hub	1	-	-	-	-	4-				
233										14		187	5961042.001	Wall Spacer	1	-	-	-	-					
234		4			7							47	5961044.001	Switch	1	-	-	-	C	D				
235							10					139.2	5961047.001	Lever	1	-	-	-	-	-3				
236							10					134.2	5961049.001	Pendulum	1	-	-	-	-	-3				
237							10					132.2	5961058.001	Brake Lever	1	-	-	-	-	-3				
238									12			168	5961060.001	Sensor Plate	1	-	-	-	-	-3				
239	3											9.2	5961070.001	Cover	1	-	-	-	-	4-2				
240	3											3	5961073.001	Spring	1	-	-	-	-					

PU Package unit

SPR Spare part recommendation

2- Hermes+2...
b Hermes+4/4.3...
6- Hermes+6...
-2S Hermes+...-2S
-2 Hermes+...-2
-3 Hermes+...-3
R Ribbon Saver

a Hermes+2/300-2/2S
b Hermes+2/300-3
c Hermes+2/600-2/2S
d Hermes+2/600-3
e Hermes+4/200
f Hermes+4/300
g Hermes+4/600

h Hermes+4.3/200
i Hermes+4.3/300
k Hermes+6/200
m Hermes+6/300

A wearing parts and accessories
B recommended spare parts for quick repair
C recommended spare parts for distributors
D recommended spare parts for central stores

Pos.	Figure/Page												No.	Part No.	Description	PU	SPR					Notes	Serial No.	
																							from	to
241		4											44	5961074.001	Guide	1	-	-	-	-	-			
242		4											43	5961082.001	PCB Ribbon Saver	1	-	-	-	C	D	R		
243				6									86.3	5961136.001	Label Sensor	1	-	-	B	C	D	4-	4267	
244				6									81.3	5961138.001	Profile	1	-	-	-	-	-	4-	4267	
245	3												9.3	5961193.001	Cover	1	-	-	-	-	-	6-2		
246		4	5	6						11	12	14	23	5961201.001	Cable Sensors	1	-	-	-	-	D			
247			5										55.3	5961204.001	Profile	1	-	-	-	-	-	6-		
248				6									81.4	5961205.001	Profile	1	-	-	-	-	-	6-		
249										10			140.3	5961210.001	Belt Roller	1	-	-	-	-	-	6-		
250					7								108.7	5961212.001	Roller	1	-	-	-	-	-	6-		5349
251					7								107.4	5961215.001	Guide	1	-	-	-	-	-	6-		
252				6									86.4	5961218.001	Label Sensor	1	-	-	B	C	D	6-		
253					7								104.4	5961220.001	Roller ZR6	1	-	-	-	-	D	6-		
254					7								103.3	5961221.001	Axle	1	-	-	-	-	-	6-		
255					7								102.4	5961223.001	Shaft	1	-	-	-	-	-	6-		
256					7								100.3	5961226.001	Belt Roller	1	-	-	-	-	-	6-		
257				6									83.3	5961227.001	Spindle	1	-	-	-	-	-	6-		
258												14	195.3	5961229.001	Ribbon Take-up Hub	1	-	-	-	-	-	6-		
259												14	196.3	5961230.001	Ribbon Supply Hub	1	-	-	-	-	-	6-		
260												13	176.1	5961232.001	Hub	1	-	-	-	-	-	2-2/2S		
261												13	175.1	5961233.001	Shaft	1	-	-	-	-	-	2-		
262				6									85.2	5961238.001	Side Plate	1	-	-	-	-	-		4267	
263										10			140.1	5961243.001	Belt Roller	1	-	-	-	-	-	2-		
264												14	195.1	5961247.001	Ribbon Take-up Hub	1	-	-	-	-	-	2-		
265												14	196.1	5961248.001	Ribbon Supply Hub	1	-	-	-	-	-	2-		
266				6									86.1	5961249.001	Label Sensor	1	-	-	B	C	D	2-		
267				6									83.1	5961258.001	Spindle	1	-	-	-	-	-	2-		
268					7								99.2	5961265.001	Locking System	1	-	-	-	-	-		4165	
269					7								98	5961267.001	Screw	1	-	-	-	-	-		4165	
270					7								102.3	5961269.001	Shaft	1	-	-	-	-	-	4-	4267	
271					7								95.2	5961270.001	Link	1	-	-	-	-	-		4165	
272					7								96.2	5961276.001	Lever	1	-	-	-	-	-		4165	
273										11	12	13	155	5961286.001	Washer	1	-	-	-	-	-	-2		
274					7								102.1	5961288.001	Shaft	1	-	-	-	-	-	2-		
275	3												2.2	5961295.001	Cover	1	-	-	-	-	-	2-3, 4-, 6-		
276					7								104.3	5961298.001	Roller ZR4	1	-	-	-	C	D	4-	4267	
277		4				8							27.3	5961306.001	Stepper Motor	1	-	-	-	C	D	bdefhikm		
278												14	189	5961308.001	Wall Spacer	1	-	-	-	-	-			
279					7								107.1	5961352.001	Guide	1	-	-	-	-	-	2-2S		
280					7								108.1	5961357.001	Roller	1	-	-	-	-	-	2-2S		5349
281										11			153.1	5961362.001	Shaft	1	-	-	-	-	-	2-2		
282										11			153.2	5961363.001	Shaft	1	-	-	-	-	-	4-2		
283										11			153.3	5961364.001	Shaft	1	-	-	-	-	-	6-2		
284										11			158.1	5961365.001	Unwinder	1	-	-	-	-	-	2-2		
285										11			158.2	5961366.001	Unwinder	1	-	-	-	-	-	4-2		
286										11			158.3	5961367.001	Unwinder	1	-	-	-	-	-	6-2		
287		4				8							27.4	5961379.001	Stepper Motor	1	-	-	-	C	D	g		
288										11			162	5961396.001	Cone	1	-	-	-	-	-	-2S		
289										12			153.4	5961434.001	Shaft	1	-	-	-	-	-	2-3		
290										12			158.4	5961435.001	Unwinder	1	-	-	-	-	-	2-3		
291											13		176.4	5961437.001	Hub	1	-	-	-	-	-	2-3		
292										12			153.6	5961448.001	Shaft	1	-	-	-	-	-	6-3		
293					7								108.2	5961462.001	Roller	1	-	-	-	-	-	2-2S	5350	
294					7								108.4	5961463.001	Roller	1	-	-	-	-	-	2-2/3	5350	
295					7								108.6	5961466.001	Roller	1	-	-	-	-	-	4-	5350	
296					7								108.8	5961468.001	Roller	1	-	-	-	-	-	6-	5350	
297											13		176.6	5961496.001	Hub	1	-	-	-	-	-	6-3		
298				6	7	8		10	11	12	13	14	PS	5961571.001	Washer Set	1	-	-	-	-	-			
299			5										70.1	5961574.001	Antistatic Brush	1	-	-	-	-	-	2-		
300			5										70.2	5961575.001	Antistatic Brush	1	-	-	-	-	-	4-		

PU Package unit

SPR Spare part recommendation

2- Hermes+2...
 4- Hermes+4/4.3...
 6- Hermes+6...
 -2S Hermes+...-2S
 -2 Hermes+...-2
 -3 Hermes+...-3
 R Ribbon Saver

a Hermes+2/300-2/2S
 b Hermes+2/300-3
 c Hermes+2/600-2/2S
 d Hermes+2/600-3
 e Hermes+4/200
 f Hermes+4/300
 g Hermes+4/600

h Hermes+4.3/200
 i Hermes+4.3/300
 k Hermes+6/200
 m Hermes+6/300

A wearing parts and accessories
 B recommended spare parts for quick repair
 C recommended spare parts for distributors
 D recommended spare parts for central stores

Pos.	Figure/Page												No.	Part No.	Description	PU	SPR					Notes	Serial No.	
																							from	to
301				6									82.2	5961578.001	Cam Axle	1	-	-	-	-	D	6-, R		
302				5									57.2	5961582.001	Bracket	1	-	-	-	-		6-		
303											12		158.6	5961618.001	Unwinder	1	-	-	-	-		6-3		
304											12		149.3	5961619.001	Wall Spacer	1	-	-	-	-		6-3		
305												14	188.1	5961660.001	Axle	1	-	-	-	-		2-		
306												14	188.2	5961661.001	Axle	1	-	-	-	-		4-		
307												14	188.3	5961662.001	Axle	1	-	-	-	-		6-		
308		4											48	5961675.001	PCB IO Interface	1	-	-	-	C	D			
309											10		138.2	5961697.001	Pivot Arm	1	-	-	-	-		-3		
310										8			113	5962347.001	Gear 48	1	-	-	-	-				
311										8			27.1	5965035.001	Stepper Motor	1	-	-	-	C	D	a		
312				5									64.2	5977536.001	Roller Ribbon	1	-	-	-	-		4-		
313				5									64.1	5984325.001	Roller Ribbon	1	-	-	-	-		2-		
314				5									64.3	5984348.001	Roller Ribbon	1	-	-	-	-		6-		

14 Packaging/Accessories

Pos.	Figure/Page												No.	Part No.	Description	PU	SPR					Notes	Serial No.	
																							from	to
315													-	5550611.001	Power Cable Type E+F	1	-	-	-	-				
316													-	5901655.001	Cable USB	1	-	-	-	-				
317													-	9104200.001	Packaging	1	-	-	-	-		2-3, 4-3		
318													-	9104240.001	Packaging	1	-	-	-	-		2-2/-2S, 4-2		
319													-	9104255.001	Packaging	1	-	-	-	-		6-2		
320													-	9104261.001	Packaging	1	-	-	-	-		6-3		

PU Package unit

2- Hermes+2...
4- Hermes+4/4.3...
6- Hermes+6...
-2S Hermes+...-2S
-2 Hermes+...-2
-3 Hermes+...-3
R Ribbon Saver

a Hermes+2/300-2/2S
b Hermes+2/300-3
c Hermes+2/600-2/2S
d Hermes+2/600-3
e Hermes+4/200
f Hermes+4/300
g Hermes+4/600

h Hermes+4.3/200
i Hermes+4.3/300
k Hermes+6/200
m Hermes+6/300

SPR Spare part recommendation

A wearing parts and accessories
B recommended spare parts for quick repair
C recommended spare parts for distributors
D recommended spare parts for central stores