

Status: 10/2024

**cab**  
*we identify more*



cab product overview  
Laser marking

**XENO**  
Made in Germany

## Key points first

Laser is economic when it comes to marking small components or even large workpieces precisely and permanent. There are several benefits:

- **Focus on smallest spaces,**  
as laser beams allow strong bundling
- **Flexibility,** as both metals and plastics can be marked  
– even on spots that are difficult to access
- **High speeds of operation,**  
as strongly bundled light must not overcome mechanical resistance
- **No mechanical force** exerted on components,  
as heat energy is brought in without direct contact
- **Highly resistant,** as laser marking is insensitive  
to acids or bases, UV radiation, heat and wear

cab marking lasers have been designed to solve a wide range of applications. It is possible to mark stagnant products of metal or plastics in a wide range of industries:

- **Medtech** – machine-readable encoding of medical or surgical instruments, compliant with the guidelines on Unique Device Identification
- **Aerospace** – DataMatrix encoding of strategic components such as turbines
- **Electronics** – permanent encoding and alphanumeric data assure quality assurance of PCB, clamps or switch gears
- **Automotive** – laser encoding to track and trace automotive components and units; markings include, for example, manufacturing data, dates, part, series and batch numbers

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee.



For current data see also the Internet:  
[www.cab.de/en/laser](http://www.cab.de/en/laser)

# Sample applications

cab marking lasers mainly work with metals and plastics.  
Depending from the requirement and material, different methods are known:



Traceable QR encoding




Markings on cast parts

## Engraving

Evaporation with high energy density removes the material.  
An indentation with a sharp outline occurs.



Medical instruments

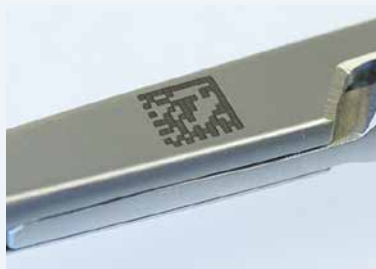

Traceable sterilization

## Annealing

finds application mainly on highly alloyed stainless steel  
or titanium.




Aluminum rating plates



Automotive components

## Ablating

uncovers material underneath the top layer.  
Examples include anodized or painted layers.



Consumption metering



Medical size allocation

## Coloring

finds application on plastics. The degree of color change  
depends from the chemical composition of the material as  
well as from ingredients and fillers.

## Marking lasers XENO 4 / XENO 4+ 20, 30, 50 Watt

The performance and quality of markings mainly depend from the output power and the laser beam focus.

cab XENO 4 marking lasers are diode-pumped and air-cooled. They have high beam quality and high pulse peak powers. Beam sources are provided with 20, 30 and 50 Watt.

Different plano-spherical lenses enable marking in fields from 69 x 69 mm to 290 x 290 mm.

Marking is possible on plastics, metals and painted surfaces.

XENO 4 marking lasers consist of two units: A control unit with an integral beam source and a scan head that is connected with the beam source via a fiber. It can be assembled in any orientation.

The integrated focus finder simplifies workpiece positioning.

1.1 - 1.18

### XENO 4

- compact scan head
- Galvanometer scanner from SCANLAB "Made in Germany"
- high operation speed
- integrated focus finder
- quick adjustment of the marking plane (4S / 4S+)
- focus shift up to 140 mm height difference (4S / 4S+)
- Laser beam source from Raycus
- Industry 4.0
- TCP/IP control and monitoring

### XENO 4+ identical to XENO 4 extended by:


- Laser beam source from IPG "Made in Germany"
- Pulse repetition frequency 2 - 500 kHz
- Warranty 2 + 2 years

The control unit and the beam source are incorporated in a 19" rack.



## Interfaces providing process control and monitoring

- 1 Ethernet 10/100 Base** to connect a PC. As delivered, the device has been configured with an IP address or in DHCP mode.
- 2 Ethernet 10/100 Base** to connect peripheral devices. Bidirectional data transfer from and to end devices
- 3 + 4 2 x RS232 C** to connect peripheral devices. Bidirectional data transfer from and to end devices
- 5 Digital I/O interface** control and monitoring. Provided are 8 inputs and outputs, freely programmable. Circuit protected according to IEC 61131-2
- 6 Remote** laser switch-on and control
- 7 Interlock / E-stop** to integrate to external safety circuits and connect an external E-stop
- 8 "Marking on-the-fly" (MOTF)** is available as an option. Individual parts or workpieces can be marked on a conveyor belt without distortion.


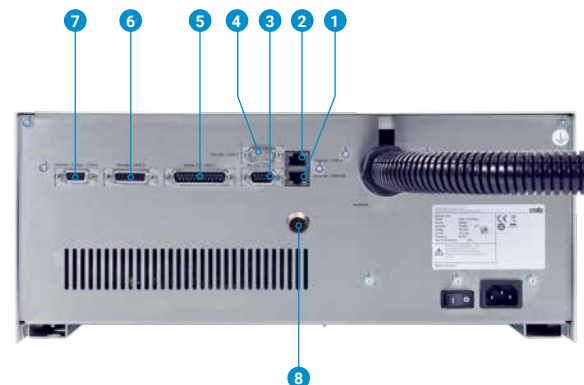


## Shifting the focus with XENO 4S / XENO 4S+

By shifting the focus, XENO 4S can within fractions of a second effortlessly compensate height differences on a component.

By mechanical unit adjustment, even complex markings are possible on different levels of a component without loss of cycle time.


A control unit calculates the respective layout scaling. Depending from the plano-spherical lens in use, shifting is possible up to  $\pm 70$  mm.

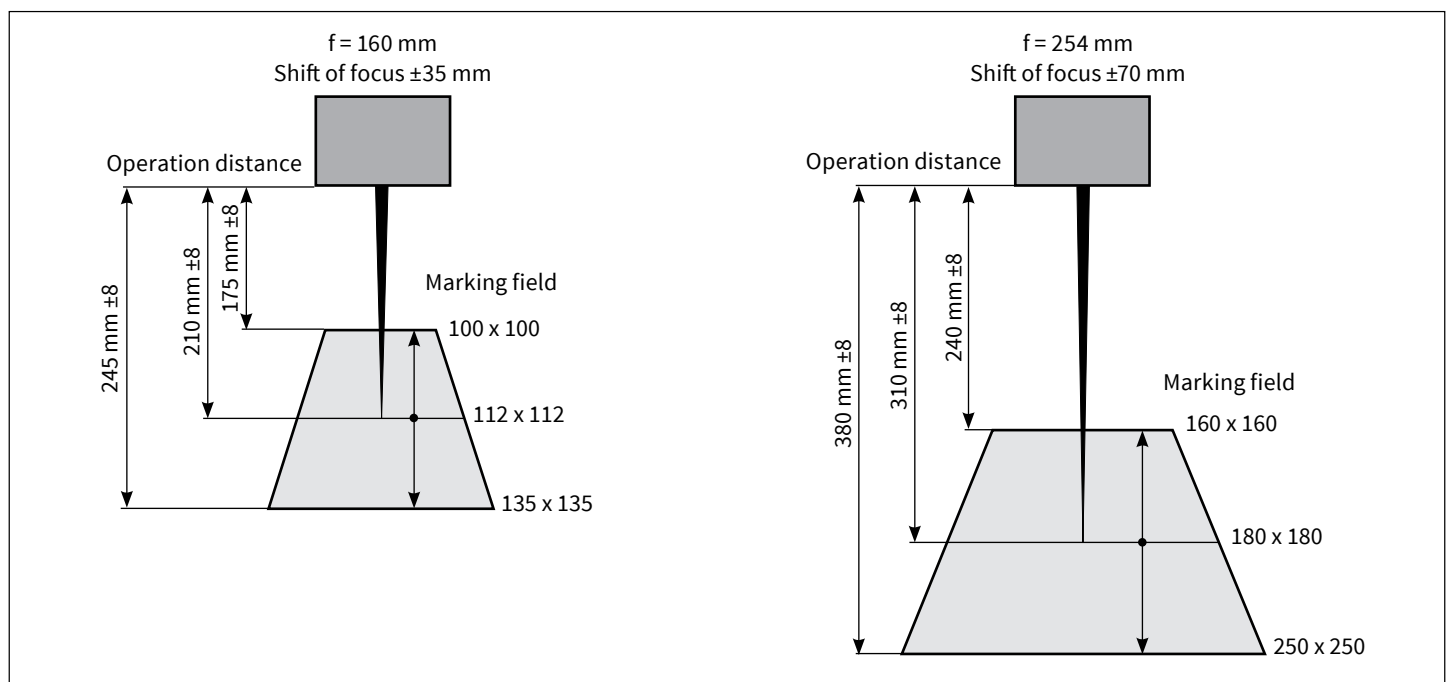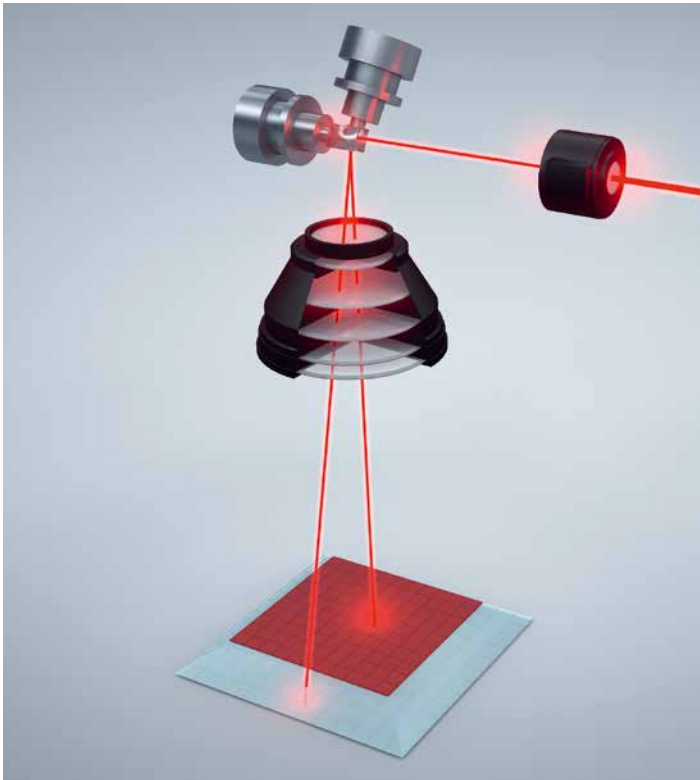


# Technical data

		1.1 - 1.15			1.16 - 1.17	1.18 - 1.19	1.20 - 1.21
<b>Marking laser</b>		<b>XENO 4 / XENO 4+</b>			<b>XENO 4S / XENO 4S+</b>		
		<b>20 W</b>	<b>30 W</b>	<b>50 W</b>	<b>20 W</b>	<b>30 W</b>	<b>50 W</b>
Beam source		Ytterbium fiber laser, pulsed, air-cooled					
cw output power	up to W	20	30	50	20	30	50
Pulse energy	mJ	1					
Wave length	nm	1.064					
Beam quality M <sup>2</sup>		<1.8					
Pulse width	ns	<120					
Pulse repetition frequency		2 - 500					
XENO 4 / XENO 4S (RAYCUS)	kHz	20 - 60	30 - 60	50 - 100	20 - 60	30 - 60	50 - 100
XENO 4+ / XENO 4S+ (IPG)	kHz	2 - 500					
Connection cable	m	2.5 (longer lengths on request)					
<b>Plano-spherical lens</b>		<b>XENO 4 / XENO 4+</b>			<b>XENO 4S / XENO 4S+</b>		
Lens	Type	100.2	160.2	254.2	420.2	160.2	254.2
Operation distance	mm	149 ± 4	210 ± 8	310 ± 8	549 ± 20	210 ± 8	310 ± 8
Marking field	mm	69 x 69	112 x 112	180 x 180	290 x 290	100 x 100 @ +35 Shift 135 x 135 @ -35 Shift	160 x 160 @ +70 Shift 250 x 250 @ -70 Shift
Spot diameter	µm	~25	~35	~50	~85	~35	~50
= Resolution	dpi	1.000	725	500	300	725	500
Scan head		horizontal / vertical					
Assembly		horizontal / vertical					
Marking speed	mm/s	>5000					
Shift of focus	mm	-		-		±35	±70
Speed of shift of focus	mm/ms	-		-		0.5	0.3
Pilot laser							
Wave length	nm	650					
cw output power	mW	<1					
Electronics							
Processor 32 bit clock rate	MHz	600					
Main memory (RAM)	MB	256					
Data memory (Flash)	MB	512					
<b>Dimensions and weights</b>		<b>Rack 4 height units 19"</b>					
Control unit W x H x D	mm	420 x 178 x 420					
Weight	kg	16					
Scan head W x H x D	mm	99 x 135 x 205			99 x 155 x 260		
Weight	kg	3			4		
<b>Operation panel</b>							
Key switch		Beam source ON/OFF					
Buttons	Pilot laser / focus finder	ON/OFF					
	Shutter open	open / close					
Display	Emission	Beam source in operation					
	Laser error	Beam source error					
	Ready	Beam source ready					
	Power	Power supply ON					
	Pilot laser / focus finder	ON					
	Shutter open	Safety lock open					
Connections Service		USB mini					
<b>Operating data</b>							
Power supply		100-240 VAC, 50/60 Hz					
Power switch		ON/OFF					
Power consumption	Standby W up to W	200	200	350	200	200	350
Approvals		CE, FCC Class A					
Laser protection class EN60825-1							
	Beam source	Class 4					
	Pilot laser	Class 2					


# Dimensional drawing






XENO 4S / XENO 4S+  
scan head



XENO 4 / XENO 4+  
scan head

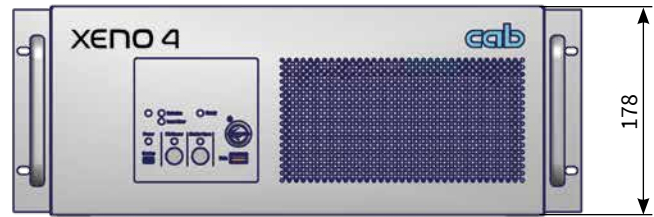

XENO 4 / XENO 4+  
control unit

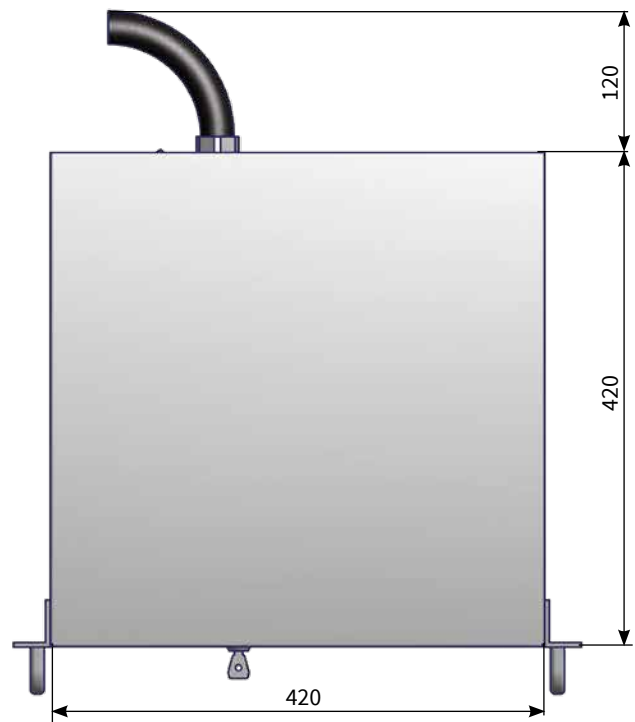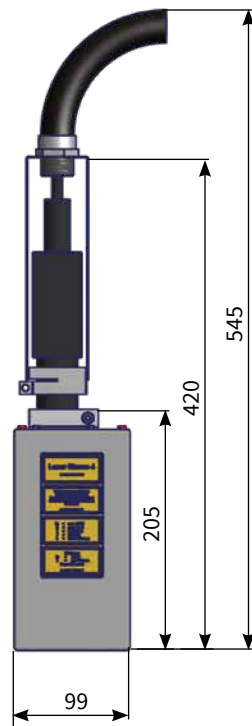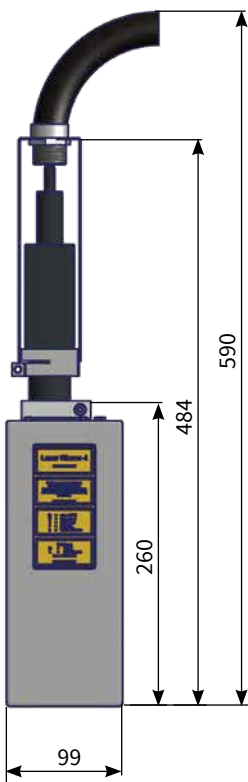

# Laser marking system XENO 1 / XENO 1+



XENO 1 is a compact desktop system, demanding little footprint and offering a large work area.

XENO 1 fits with marking on metals or plastics.

XENO 1 completes the range of cab laser marking systems in the lower price segment. Processing the system complies with high industrial standards.

Galvanometer scanner from SCANLAB "Made in Germany". The XENO 1+ variant has a laser beam source from IPG "Made in Germany" and an extended warranty of 2 + 2 years.

The marking plane is adjustable in heights up to 210 mm with the motor-driven moveable Z-axis and easily and quickly with the focus finder. In case of graduated marking surfaces, the scan head is automatically tracked by software.

Depending from the lens, the size of the marking field is 112 x 112 or 180 x 180 mm. It can be moved from the center to the right margin. The marking can be simulated with the pilot laser.

Interior LED lighting allows observation of the workpiece when the operation door is closed. The workpiece holder is mounted on the groove plate. A rotary axis is available for cylindrical objects.

The automatic operation door opens or closes within seconds. Material can be inserted manually or by a handling system from three sides.

With the comprehensive cabLase marking software layouts are graphically designed, markings controlled and processes monitored.

Legal environmental regulations RoHS and REACH are observed.

		2.1	2.2	2.3	2.4
<b>Laser marking system</b>		<b>XENO 1 / XENO 1+</b>			
Beam source		Ytterbium fiber laser, pulsed			
cw output power	up to W	20		30	
Pulse energy	mJ	1			
Wave length	nm	1,064			
Beam quality M <sup>2</sup>		<1.8			
Pulse width	ns	<120			
Pulse repetition frequency					
XENO 1 (RAYCUS)	kHz	20 - 60		30 - 60	
XENO 1+ (IPG)	kHz	2 - 500			
Pilot laser / focus finder					
Wave length	nm	650			
cw output power	mW	<0.4			
Lens	Type	160.2	254.2	160.2	254.2
Operation distance	mm	210 ± 8	310 ± 8	210 ± 8	310 ± 8
Marking field	mm	112 x 112	180 x 180	112 x 112	180 x 180
Work area height	mm	200	100	200	100
Groove plate W x H x D x pitch	mm	500 x 200 x 375 x 25			
Z-axis stroke, motor-driven	mm	210			
Position accuracy	mm	± 0.1			
Repetitive accuracy	mm	± 0.1			
Traversing speed	mm/s	20			
Interior lighting		LED			
Operation door		motor-driven opening / closing			
Workpiece weight	up to kg	30			
<b>Dimensions and weight</b>					
Device	W x H x D	mm 580 x 660 x 700			
	Weight approx.	kg 65			
Laser protection window	W x H	mm 100 x 200			
Extraction					
Nozzle flexible hose	DN	mm 38			
Suction pipe	DN	mm 50			
<b>Operating data</b>					
Power supply		100-240 VAC, 50/60 Hz			
Power consumption		Standby <35 W / typical 150 W / up to 200 W			
Approvals		CE, FCC Class A			
Laser protection class EN60825-1		Class 1			
<b>Operation panel</b>					
LED displays	Power, Ready, Emission, Error, Marking				
Buttons, illuminated	Control ON/OFF	Start			
	Focus finder ON/OFF	Z-axis up / down			
	Extraction ON/OFF	Rotary axis left / right			
	LED ON/OFF	Operation door open / closed			
Switch	E-stop				
Key switch	automatic / manual				
<b>Monitoring</b>					
Safety circuits	closed				
Collective error	Marking laser	Extraction system			
<b>Interfaces</b>					
Operation room	Rotary axis	Digital I/O interface			
Back of the device	2 x Ethernet TCP/IP	Extraction and filter system AF5			
	24 V for digital I/O interface	External start, external E-stop			

## Accessory

6.1 **Extraction and filter system AF5**

8.6 **Linear axis X230**




## Details

XENO 1 is a fully equipped laser marking system offering high operating comfort for marking single components and series.



- 1 **Fiber laser** 20 or 30 W
- 2 Motor-driven **operation door**
- 3 **Scan head**, providing motor-driven height setting and a pilot laser to preview the marking
- 4 **Focus finder** to set the marking plane
- 5 **Interior LED lighting**
- 6 **Rotary axis** with a 3-jaw chuck for markings on cylindrical items
- 7 **Digital I/O interface** control and monitoring, provided are 8 inputs and outputs, freely programmable
- 8 **Plug** to connect the rotary axis
- 9 **Operation panel** providing buttons and status display
- 10 **Groove plate** to clamp workpiece carriers
- 11 **Z-axis**, moveable along the groove plate
- 12 **Suction hose**

## Interfaces

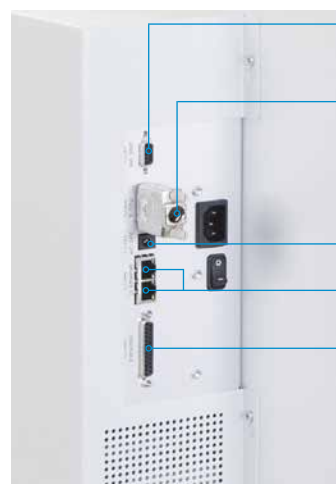

- 13 **External start signal**
- 14 **E-stop** to integrate into external safety circuits
- 15 **External 24 V** for additional operations
- 16 **2 x Ethernet 10/100 Base**  
As delivered, the device has been configured with an IP address or in DHCP mode.
- 17 **Port to connect an extraction and filter system**

# Laser marking system XENO 3 / XENO 3+



XENO 3 provides an integrated laser system to mark metal and plastic plates permanently. Fiber laser beam source, control unit and operation room are incorporated in a joint laser safety housing according to protection class 1. Due to its compact design and small footprint, XENO 3 fits with desktop operations.

Galvanometer scanner from SCANLAB "Made in Germany". The XENO 3+ variant has a laser beam source from IPG "Made in Germany" and an extended warranty of 2 + 2 years.

Markings applied by a XENO 3 remain clearly legible even in the long term in rough surroundings.

Hydraulic cylinders, engines, pumps, gears, vehicle chassis oder system components are typical items to be marked with a XENO 3.

Replace magazines enable to process different plate sizes. Plates to be processed are 40 x 20 to 120 x 100 mm in size, resp. 0.5 to 1 mm in thickness. Plate stacking is possible to heights of 50 mm.

The marking can be observed through the protection window and with the help of the lit interior. Fold-out carry handles simplify the installation of the system.

With the comprehensive cabLase marking software layouts are graphically designed, markings controlled and processes monitored.

The system might be remote controlled or monitored in networks in which machines interact with other machines or human beings.

XENO 3 is particularly suitable of metal engravings and ablation of top layer.

		3.1	3.2
<b>Laser marking system</b>		<b>XENO 3 / XENO 3+</b>	
Beam source		Ytterbium fiber laser, pulsed	
cw output power	up to W	20	30
Pulse energy	mJ	1	
Wave length	nm	1,064	
Beam quality M <sup>2</sup>		<1.8	
Pulse width	ns	<120	
Pulse repetition frequency			
XENO 3 (RAYCUS)	kHz	20 - 60	30 - 60
XENO 3+ (IPG)	kHz	2 - 500	
Pilot laser			
Wave length	nm	650	
cw output power	mW	<0.4	
Lens	Type	160.2	
Operation distance	mm	210 ± 8	
Marking field	mm	112 x 112	
Interior lighting		LED	
<b>Material</b>			
Plates			
Width x Height	from mm	40 x 20	
	up to mm	120 x 100	
Plate tolerance according		ISO 2768-mk	
Position accuracy	mm	±0.2	
Plates 0.5 mm	quantity	100	
Plate thickness	mm	0.5 - 1.0	
<b>Dimensions and weight</b>			
Device	W x H x D mm	420 x 480 x 480	
	Weight approx. kg	< 35	
Laser protection window W x H mm		100 x 200	
Extraction			
Nozzle flexible hose	NW mm	38	
Suction pipe	NW mm	50	
<b>Interfaces</b>			
Back of the device		2 x Ethernet TCP/IP, Extraction and filter system AF5, external start, external E-stop	
<b>Operating data</b>			
Power supply		100-240 VAC, 50/60 Hz	
Power consumption		Standby <35 W / typical 150 W / up to 200 W	
Approvals		CE, FCC Class A	
Laser protection class EN60825-1		Class 1	
Performance level		d	
<b>Operation panel</b>			
LED displays	Power, Ready, Emission, Error, Marking		
Switch	E-stop		
<b>Monitoring</b>			
Operation door	open / closed		
Collective error	Marking laser Extraction system		
<b>Software</b>			
Marking software	cabLase Editor 5 cabLase automation		
Software operation	Start Pilot laser ON/OFF Extraction ON/OFF LED ON/OFF		

## Accessories

3.3 Magazine, customer-specific

6.1 Extraction and filter system AF5


## Details

XENO 3 is a fully equipped laser marking system offering high operating comfort for marking single plates and series.



- 1 **Fiber laser** 20 or 30 W
- 2 **Setup door**
- 3 **Operation panel**  
providing buttons and status display
- 4 **Scan head**, providing manual height setting  
and a pilot laser to preview the marking
- 5 **Interior LED lighting**
- 6 **Extraction**, integrated
- 7 **Carry handles**
- 8 **Typeplate handling module**
- 9 **Replace magazine**
- 10 **Output magazine**

## Interfaces

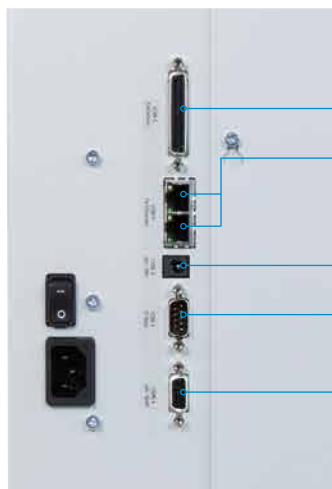

- 11 **Port to connect an extraction and filter system**
- 12 **2 x Ethernet 10/100 Base**  
As delivered, the device has been configured  
with an IP address or in DHCP mode.
- 13 **External 24 V** for additional operations
- 14 **E-stop** to integrate into external safety circuits
- 15 **External start signal**

# Laser safety housing LSG+100E



The laser safety housing LSG+100E offers an industrial solution for marking component series with a marking laser XENO 4. The rugged metal design besides a large work area provides enough space to integrate both the beam source and an industrial PC in a 19" assembly frame.

A keyboard and a monitor are assembled ergonomically to a pivot arm. The operation door opens and closes electrically.

	4.1		4.2	
<b>Laser safety housing</b>	<b>LSG+100E 230 V</b>		<b>LSG+100E 120 V</b>	
Operation room W x H x D mm	980 x 460 x 980			
Grooved plate, T-slot, W x D mm	550 x 375			
Pitch mm	25			
Z-axis stroke mm	440			
Position accuracy mm	0.02			
Repetitive accuracy mm	± 0.02			
Traversing speed up to m/s	60			
Interior lighting	Low energy light bulb			
Operation door	electrical opening / closing			
Time to open / close s	<2			
Lens Type	100.2	160.2	254.2	420.2
Marking field mm	69 x 69	112 x 112	180 x 180	290 x 290
Operation distance mm	141 ± 4	202 ± 8	302 ± 8	541 ± 20
Workpiece height up to mm	60 - 490	430	330	90
Workpiece height up to kg	50			
<b>Dimensions and weight</b>				
W x H x D mm	1,000 x 2,280 x 1,120			
Laser prot. window W x H mm	200 x 100			
Machine stands Ø mm	80			
Suction pipe Ø mm	50			
Frame to assemble XENO 4 and a PC	4 height units 19"			
Weight kg	395			

## Operating data

Power supply	220-240 VAC, 50 Hz	100-140 VAC, 60 Hz
Power switch	ON/OFF	
Laser protection class EN60825-1	Class 1	
Approval	CE	

## Operation panel

LED display	Power Ready	Emission Error	Marking
Buttons, illuminated	Control ON/OFF Focus finder ON/OFF Extraction ON/OFF Lighting ON/OFF Start Z-axis up / down X-axis left / right Rotary axis left / right Operation door open / close Reserve		
Switch	E-stop		
Key switch	automatic / manual		

## Monitoring

Safety circuits	closed
Collective error	Marking laser Extraction system

## Interfaces

Interlock / E-stop	XENO 4
Remote	XENO 4
Digital I/O interface	XENO 4
Stepper motor	Z-axis, X-axis, rotary axis
Extraction and filter system	AF5

## Details



### Setup door

A large setup door allows to access LSG+100E easily. Jigs may be assembled comfortably to the grooved plate in the well-lit operation room.

### Linear axis Z400

It provides precise and fast focus setting. For setup, the axis is traversed with the help of buttons integrated to the operation panel.

## Accessories

- 4.3 **PC in a 4 height units 19" rack**
- 4.4 **Monitor 23.8"**
- 4.5 **Standard keyboard, optical mouse**
- 4.6 **Keyboard with trackball**
- 6.1 **Extraction and filter system AF5**
- 8.1 on request: **Rotary table module RTM650**
- 8.6 **Linear axis X230**
- 8.9 **Linear axis X400**
- 8.10 **Rotary axis D30**
- 8.11 **3-jaw chuck D30**
- 8.15 **Axis controller 2S**

# Laser label marker LM+

5.1 - 5.2



The laser label marker allows marking labels of different sizes straight from the roll precisely and cutting them out without the need of additional tools.

After the marking, labels made of laser markable foil can be cut or externally rewound.

## Accessories

- 4.3 **PC in a 4 height units 19" rack**
- 4.4 **Monitor 23.8"**
- 4.5 **Standard keyboard, optical mouse**
- 4.6 **Keyboard with trackball**
- 5.3 **External rewinder**
- 5.4 **Hose set**
- 5.5 **Mobile cart**
- 5.6 **Console**
- 5.7 **Monitor column**
- 6.1 **Extraction and filter system AF5**

	5.1	5.2
<b>Laser label marker</b>	<b>LM+160.2</b>	<b>LM+254.2</b>
Operation room W x H x D mm	160 x 5 x 190	
Position accuracy mm	0.2	
Transport speed mm/s	200	
Interior lighting	LED	
Material	Label or continuous materials	
Thickness mm	0.055 - 0.3	
Weight up to g/m <sup>2</sup>	500	
Width mm	25 - 120	
Label height up to mm	180	
Roll		
Outside diameter up to mm	300	
Core diameter mm	76	
Winding	outside / (inside on request)	
Lens Type	160.2	254.2
Marking field mm	112 x 112	120 x 170
Operation distance mm	210 ± 8	310 ± 8
<b>Dimensions and weight</b>		
W x H x D mm	440 x 520 x 802	
Laser prot. window W x H mm	100 x 50	
Machine stands Ø mm	50	
Suction pipe Ø mm	50	
Weight kg	22	
<b>Operating data</b>		
Power supply	100-240 VAC, 50/60 Hz	
Power switch	ON/OFF	
Laser protection class EN60825-1	Class 1	
Approval	CE	

<b>Operation panel</b>	
LED display	Continuous material Labels
Buttons	Material feed Material backfeed Cut
Switches	automatic / manual E-stop
<b>Monitoring</b>	
Safety circuits	closed
Wipe-down roller	locked
Material	in marking position / no material
<b>Interfaces</b>	
Interlock / E-Stop XENO 4	
Serial RS232C XENO 4 CON5	
External E-stop	
Cutter	




**Laser label marker LM+**  
on a mobile cart, providing an external rewinder on the console, a monitor column and an extraction and filter system AF5

# cabLase marking software

## cabLase Editor 5 features

- graphic layout design,
- marking control,
- process monitoring

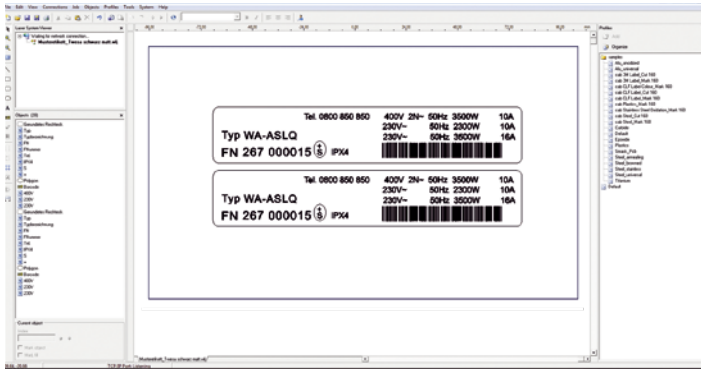

## cabLase at a glance

<b>Software</b>		
Software	cabLase Editor 5	
<b>Fonts</b>		
Font types	All TrueType fonts included in Windows, filled or outline; laser typical single, double, triple line fonts. All font types can be freely scaled and “wobbled”.	
Alignment	Any alignment and direction of rotation, circular ark marking	
Character spacing	compress and stretch	
<b>Graphics</b>		
Graphic elements	Lines, circles, rectangles, polygons; hatching of all closed surface elements	
Graphic formats	PLT, DXF, BMP, JPG, PCX, WMF, EPS, TIF; All graphic elements can be scaled, moved, rotated, grouped or mirrored. Special tools are available to align the objects.	
<b>Codes</b>		
1D barcodes (linear)	Interleaved 2/5 Code 39, Code 93 Code 128	Codabar EAN UPC
2D codes	DataMatrix, ECC200, QR code	
	All codes are variable in height, modular width, ratio; check digit or inverted code output are options	
<b>Further features</b>		
Serial numbers, time, date		
Variable fields		
Add graphic data of Windows programs		
Program laser parameters		
Memory process data and parameters		
Control digital inputs and outputs		
Control and monitor additional axes, e.g. stroke, rotary and linear		
<b>Recommended system requirements PC</b>		
Operation system	Windows 10 (32/64 bit)	
Processor	Min. Intel Core i5-6400, recommended i7-6700 or higher	
Main storage	Minimum 8 GB, recommended 16 GB or higher	
Hard disc	Memory requirements software 1 GB	
Interfaces	Network card 10/100 Mbit for laser connection USB 2.0 connection for dongle	

## Stand-alone operation

cabLase supports marking without the need of a PC. Marking layouts and related fonts are downloaded by the software to the laser control unit and managed. Digital signals provide process control and monitoring.

## Remote host operation


cabLase allows remote control by a master control unit such as a PC or PLC serially, via Ethernet or ProfiBus. Programming commands are provided to select a layout, change marking data, control and monitor processes.

## Remote API interface

if lasers are integrated in complex production processes. Objects and parameters, layouts and variable data can be set, administrated and processed externally via a PC or PLC.

## COM automation server

for customer-specific marking applications. A library of commands provides all the functions of the cabLase marking software.

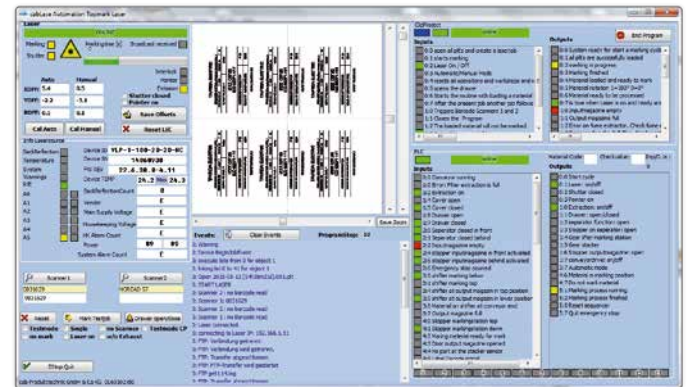

## Integration in ERP and MES systems

cabLase provides program modules to integrate a marking system in MES and ERP platforms. As cab is a member of the SAP Printer Vendor Program, marking applications may be for example connected to the SAP data stream.

## Industry 4.0

Industry 4.0 and the IoT represent smart production. Usable software and connectivity are implementation keys. Future-proof cab marking lasers provide all the interfaces necessary for programming and data transfer.  
**We gladly advise you in your application!**

9.1 - 9.2




At delivery, all marking laser systems include a cabLase Editor 5 USB software dongle.

# Extraction and filter system AF5 for XENO systems

Processing materials with a laser produces poisonous dusts and gas pollutants. Extraction protects the operator's health and prevents the laser room and lens from contamination. It also ensures that laser power maintains. Air is extracted from the working room with the help of a highly performant turbine through a flexible hose.


Pollutants and dusts are emitted in the pre-filter and a filter particularly provided for suspended particles. Gas pollutants are absorbed by the active carbon filter. Clean air is returned to the environment.

The system has a modular design. Filters are easy to replace.

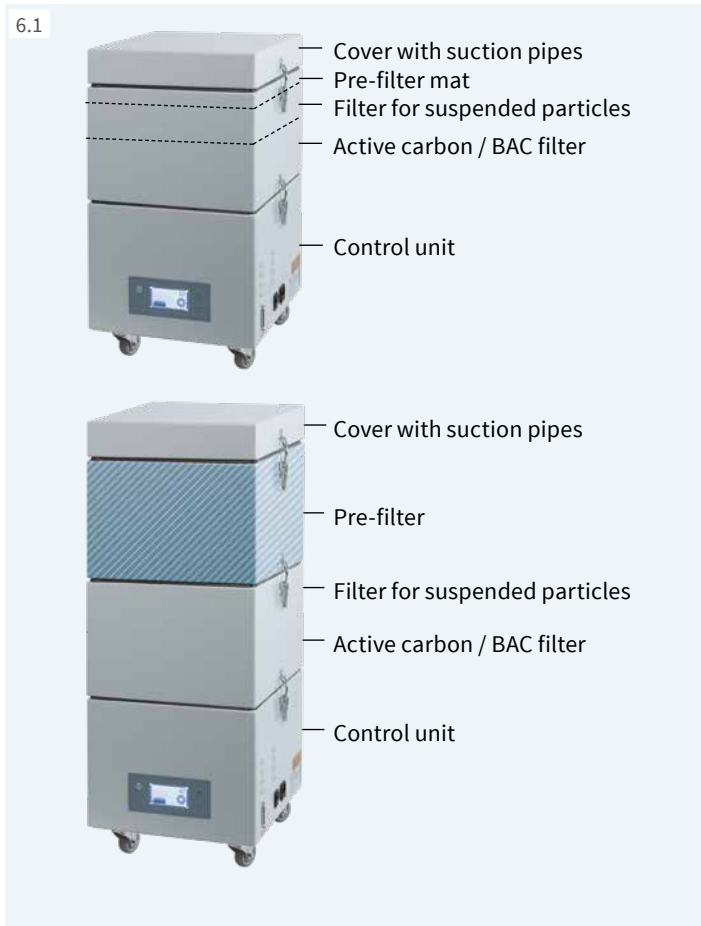

		6.1	6.2
<b>Extraction and filter system</b>		<b>AF5</b>	<b>AF5 with a pre-filter module</b>
Suction power	up to m <sup>3</sup> /h		230
Vacuum	up to Pa		11,000
<b>Filter equipment</b>	<b>Filter class</b>		
Pre-filter mat	F5	■	-
Pre-filter	F7	-	■
Filter for susp. part.	H13	■	■
Active carbon / BAC filter		■	■
<b>Dimensions and weights</b>			
Device	Width	mm	350
	Height	mm	647
	Depth	mm	350
	Weight approx. kg		40
Suction pipe	NW	mm	50
			50
<b>Operating data</b>			
Power supply			100-240 VAC, 50/60 Hz
Power consumption	Standby	W	<40
	typical	W	400
	up to	W	1,100
Approvals			CE, FCC, cETLus, W3, CAN ICES-3

## Consumables

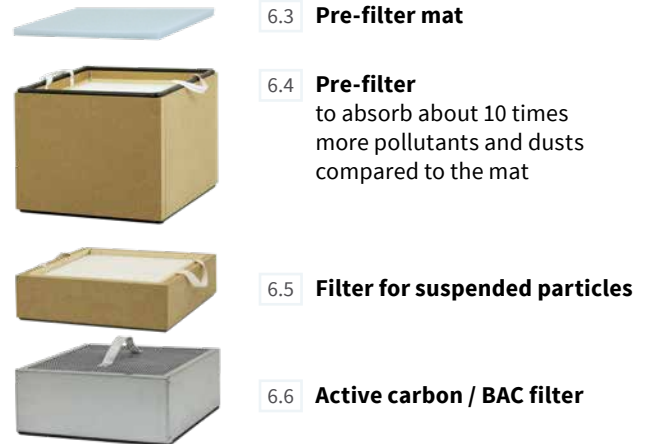

## Accessories




<b>Operation panel</b>		
Display	Colored LCD display	
	Filter saturation	Error report
	Filter state	Turbine / temperature
	Suction power	System error
Button 1	Run / Standby	
Button 2	Suction power	
<b>Interface</b>		
	Serial RS232C / Digital I/O Interface	
Monitoring	Run / standby	Filter 1/2 vacuum
	Suction power	Rotational speed
	Temperature error	Temperature
	Turbine error	Operating hours Run
	Filter saturated	Operating hours Standby
	Filter pre-warning (75 %)	
Control	Run / standby	
	Suction power ± Reset	



# Accessories

7.1 - 7.4

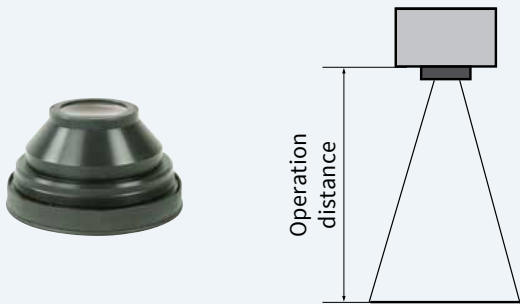

## Plano-spherical lenses F-Theta XENO 4

Lenses are provided to cover different marking fields. The smaller the marking field, the higher the resolution.

Plano-spherical lens		100.2	160.2	254.2	420.2
To be used with		XENO 4	XENO 1 XENO 3 XENO 4/4S	XENO 1 XENO 4/4S	XENO 4
Operation distance	mm	149 ± 4	210 ± 8	310 ± 8	549 ± 20
Marking field	mm	69 x 69	112 x 112	180 x 180	290 x 290
Spot diameter	µm	~25	~35	~50	~85
Resolution	dpi	1,000	725	500	300
Shift of focus with XENO 4S	mm	-	± 35	± 70	-
Shift of focus speed	ms/mm	-	0.5	0.3	-

7.5




## Protective glass for F-Theta

The glass is assembled to the plano-spherical lens F-Theta. It can be replaced in the case of damage.

Protective glass		100	160	254	420
Outside diameter	mm	80	75	75	114

8.1

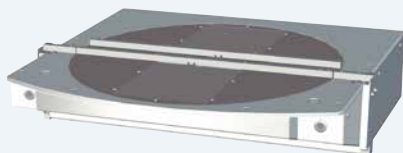


## Rotary table module RTM650 for LSG+100E


to assemble two jigs for a single or more workpieces. 180° rotation is released by two-hand operation.

Rotary table module		RTM650		
Rotary table diameter	mm	650		
Plano-spherical lens	Type	100.2	160.2	254.2
Workpiece height	up to mm	360	300	150
Workpiece weight	up to kg	20 (incl. workpiece carrier)		
Switch accuracy		± 0.1 mm at = 600 mm		
Cycle time, rotating		2.5 s / 180°		

8.2



8.3



## Laser protection window and assembly frame for LSG+100E

to be assembled in housings or doors to observe the marking process. The window may be assembled directly or with the help of the black anodized front panel and the back side frame behind the wall of the housing.

Laser protection window		100 x 200	
Assembly frame		100 x 200	
Dimensions	Width mm	228	228
	Height mm	128	128
	Thickness mm	3	2

## Accessories

8.4, 8.5



**Linear axes Z400, Z200** for XENO 4  
to position the scan head precisely.

Linear axis		Z400	Z200
Traversing distance	mm	440	200
Position accuracy	mm	0.05	0.05
Repetitive accuracy	mm	± 0.05	± 0.05
Traversing speed	up to mm/s	60	20
Dimensions W x H x D	mm	110 x 840 x 220	110 x 510 x 220
Load capacity	kg	10	7
Weight	kg	16	9

8.6 - 8.9



**Linear axis X230** for LSG+100E and XENO 1  
**Linear axis X400** for LSG+100E

By traversing customer-specific workpiece or pallet carriers along the X-axis, a marking field can be extended.

Linear axis		X230	X400
Traversing distance	mm	230	440
Position accuracy	mm	0.05	0.05
Repetitive accuracy	mm	± 0.05	± 0.05
Traversing speed	up to mm/s	50	60
Dimensions W x H x D	mm	503 x 142 x 85	835 x 110 x 200
Load capacity	kg	15	50
Weight	kg	10	16
<b>Cable to connect a linear axis</b>		<b>X230</b>	
Length	m	1 (XENO 1), 2 (LSG+100E)	

8.10 - 8.12



**Rotary axis D30** for LSG+100E  
**Rotary axis D30.1** for XENO 1

for markings on the circumference of cylindrical workpieces.  
Workpiece clamping in the 3-jaw chuck

Rotary axis		D30 / D30.1
Rotational speed	U/min	0 - 40
Operating torque	Nm	12
Increment	at least [arcmin]	2.5
Holding torque	Nm	20
Through bore	Ø mm	15
Workpiece	Ø up to mm	160
Distance to the grooved plate	mm	84
Dimensions W x H x D	mm	125 x 105 x 128
Weight	kg	3
<b>3-jaw chuck</b>		<b>D30</b>
Clamping range	Ø inside mm	23 - 76
	Ø outside mm	3 - 76
<b>Cable to connect a rotary axis</b>		<b>D30</b>
Length	m	1

8.15, 8.16



**Axis controller 2S** for LSG+100E and XENO 4

to position the linear and rotary axes  
with the help of a RS232 or the digital I/O interface.



Axis controller		2S
Dimensions W x H x D	mm	150 x 110 x 25
Interfaces for	Z-axis, rotary axis	
	digital I/O	for manual operation
	RS232	for automatic operation
Voltage		24 VDC
<b>Cable to connect the axis controller</b>		<b>2S</b>
Length	m	3




# Delivery program

Pos.	Part no.	XENO 4 / XENO 4S
1.1	<b>5528560</b>	Marking laser XENO 4 20 W / 100.2
1.2	<b>5528430</b>	Marking laser XENO 4 20 W / 160.2
1.3	<b>5528435</b>	Marking laser XENO 4 20 W / 254.2
1.4	<b>5528570</b>	Marking laser XENO 4 20 W / 420.2 v.E
1.5	<b>5528565</b>	Marking laser XENO 4 30 W / 100.2
1.6	<b>5528440</b>	Marking laser XENO 4 30 W / 160.2
1.7	<b>5528445</b>	Marking laser XENO 4 30 W / 254.2
1.8	<b>5528575</b>	Marking laser XENO 4 30 W / 420.2
1.9	<b>5528580</b>	Marking laser XENO 4 50 W / 100.2
1.10	<b>5528585</b>	Marking laser XENO 4 50 W / 160.2
1.11	<b>5528590</b>	Marking laser XENO 4 50 W / 254.2
1.12	<b>5528595</b>	Marking laser XENO 4 50 W / 420.2
1.13	<b>5528860</b>	Marking laser XENO 4 20W/254.2 MOTF
1.14	<b>5528865</b>	Marking laser XENO 4 30W/254.2 MOTF
1.15	<b>5528870</b>	Marking laser XENO 4 50W/254.2 MOTF
1.16	<b>5528504</b>	Marking laser XENO 4S 20 W / 160.2
1.17	<b>5528506</b>	Marking laser XENO 4S 20 W / 254.2
1.18	<b>5528508</b>	Marking laser XENO 4S 30 W / 160.2
1.19	<b>5528510</b>	Marking laser XENO 4S 30 W / 254.2
1.20	<b>5528600</b>	Marking laser XENO 4S 50 W / 160.2
1.21	<b>5528605</b>	Marking laser XENO 4S 50 W / 254.2
	Scope of delivery	Marking laser XENO 4 incl. lens USB software dongle Software cabLase Editor 5 Power cable Type E+F, 1.8 m Patch cable CAT 5e, 3 m E-stop dongle Assembly instructions DE / EN
Pos.	Part no.	Accessories
1.22	<b>5528441</b>	Adapter plate XENO 4/FL+
1.23	<b>5528555</b>	Adapter plate XENO 4S/FL+




Pos.	Part no.	XENO 4+ / XENO 4S+
1.1	<b>5529390</b>	Marking laser XENO 4+ 20 W / 100.2
1.2	<b>5529395</b>	Marking laser XENO 4+ 20 W / 160.2
1.3	<b>5529400</b>	Marking laser XENO 4+ 20 W / 254.2
1.4	<b>5529405</b>	Marking laser XENO 4+ 20 W / 420.2 v.E
1.5	<b>5529410</b>	Marking laser XENO 4+ 30 W / 100.2
1.6	<b>5529415</b>	Marking laser XENO 4+ 30 W / 160.2
1.7	<b>5529420</b>	Marking laser XENO 4+ 30 W / 254.2
1.8	<b>5529425</b>	Marking laser XENO 4+ 30 W / 420.2
1.9	<b>5529430</b>	Marking laser XENO 4+ 50 W / 100.2
1.10	<b>5529435</b>	Marking laser XENO 4+ 50 W / 160.2
1.11	<b>5529440</b>	Marking laser XENO 4+ 50 W / 254.2
1.12	<b>5529445</b>	Marking laser XENO 4+ 50 W / 420.2
1.13	<b>5529480</b>	Marking laser XENO 4+ 20W/254.2 MOTF
1.14	<b>5529485</b>	Marking laser XENO 4+ 30W/254.2 MOTF
1.15	<b>5529490</b>	Marking laser XENO 4+ 50W/254.2 MOTF
1.16	<b>5529450</b>	Marking laser XENO 4S+ 20 W / 160.2
1.17	<b>5529455</b>	Marking laser XENO 4S+ 20 W / 254.2
1.18	<b>5529460</b>	Marking laser XENO 4S+ 30 W / 160.2
1.19	<b>5529465</b>	Marking laser XENO 4S+ 30 W / 254.2
1.20	<b>5529470</b>	Marking laser XENO 4S+ 50 W / 160.2
1.21	<b>5529475</b>	Marking laser XENO 4S+ 50 W / 254.2
	Scope of delivery	Marking laser XENO 4 incl. lens USB software dongle Software cabLase Editor 5 Power cable Type E+F, 1.8 m Patch cable CAT 5e, 3 m E-stop dongle Assembly instructions DE / EN
Pos.	Part no.	Masterencoder
1.24	<b>5918979</b>	Rotary encoder with cable 2.5 m
1.25	<b>5918475</b>	Extender cable for rotary encoder M12, 5 pins, a-coded, 2.5 m
	<b>5918942</b>	Extender cable for rotary encoder M12, 5 pins, a-coded, 10 m
1.26	<b>5918981</b>	Friction wheel for rotary encoder
1.27	<b>5918980</b>	Retainer for rotary encoder

# Delivery program

Pos.		Part no.	XENO 1
2.1		<b>5528130</b>	Laser marking system XENO 1 20 W / 160.2 incl. lens
2.2		<b>5528140</b>	Laser marking system XENO 1 20 W / 254.2 incl. lens
2.3		<b>5528150</b>	Laser marking system XENO 1 30 W / 160.2 incl. lens
2.4		<b>5528160</b>	Laser marking system XENO 1 30 W / 254.2 incl. lens
	Scope of delivery		Laser marking system XENO 1 incl. lens USB software dongle cabLase Editor 5 Power cable Type E+F, 1.8 m Patch cable CAT 5e, 3 m E-stop dongle Operator's manual DE / EN
Pos.		Part no.	XENO 3
3.1		<b>5528610</b>	Laser marking system XENO 3 20 W / 160.2 incl. lens
3.2		<b>5528615</b>	Laser marking system XENO 3 30 W / 160.2 incl. lens
	Scope of delivery		Laser marking system XENO 3 incl. lens USB software dongle cabLase Editor 5 Power cable Type E+F, 1.8 m Patch cable CAT 5e, 3 m E-stop dongle Operator's manual DE / EN

Pos.		Part no.	XENO 1+
2.1		<b>5529370</b>	Laser marking system XENO 1+ 20 W / 160.2 incl. lens
2.2		<b>5529375</b>	Laser marking system XENO 1+ 20 W / 254.2 incl. lens
2.3		<b>5529380</b>	Laser marking system XENO 1+ 30 W / 160.2 incl. lens
2.4		<b>5529385</b>	Laser marking system XENO 1+ 30 W / 254.2 incl. lens
	Scope of delivery		Laser marking system XENO 1+ incl. lens USB software dongle cabLase Editor 5 Power cable Type E+F, 1.8 m Patch cable CAT 5e, 3 m E-stop dongle Operator's manual DE / EN
Pos.		Part no.	XENO 3+
3.1		<b>5529360</b>	Laser marking system XENO 3+ 20 W / 160.2 incl. lens
3.2		<b>5529365</b>	Laser marking system XENO 3+ 30 W / 160.2 incl. lens
	Scope of delivery		Laser marking system XENO 3+ incl. lens USB software dongle cabLase Editor 5 Power cable Type E+F, 1.8 m Patch cable CAT 5e, 3 m E-stop dongle Operator's manual DE / EN
Pos.		Part no.	Accessory
3.3		<b>5528608</b>	Magazine, customer-specific

# Delivery program



Pos.		Part no.	Devices
4.1		<b>5528090</b>	Laser safety housing LSG+100E 230 V
4.2		<b>5528095</b>	Laser safety housing LSG+100E 120 V
	Scope of delivery		Laser safety housing LSG+100E Power cable Type E+F, 1.8 m Conn. cable, 9/9 pins, 3 m, for Interlock / E-Stop Conn. cable, 9/9 pins, 3 m, for Remote Conn. cable, 25/25 pins, 3 m, for I/O interface Conn. cable, 15/15 pins, 3 m, for extraction Pivot arm to assemble a monitor/keyboard tray Assembly instructions DE / EN
Pos.		Part no.	Accessories
4.3		<b>5570125</b>	PC in 19" housing 4 height units, DE
		<b>5570135</b>	PC in 19" housing 4 height units, EN
4.4		<b>5570136</b>	Monitor 23,8"
4.5		<b>5901626</b>	Standard keyboard USB, DE
		<b>5901677</b>	Standard keyboard USB, EN
		<b>5901658</b>	Optical mouse
4.6		<b>5901621</b>	USB keyboard with trackball, DE
		<b>5901651</b>	USB keyboard with trackball, EN

Pos.		Part no.	Devices
5.1		<b>5528670</b>	Laser label marker LM+ 160.2 for XENO 4
5.2		<b>5528675</b>	Laser label marker LM+ 254.2 for XENO 4
	Scope of delivery		Laser label marker LM+ Power cable Type E+F, 1.8 m Conn. cable, 9/9 pins, 3 m, for Interlock / E-Stop Conn. cable, 9/9 pins, 3 m, for Remote Conn. cable, 25/15 pins, 3 m, for extraction Funnel to include scan head Guide 1 mm for foil intake Guide 2 mm for foil intake Cutter Extraction closure Throttle-valved hinge for extraction Assembly instructions DE / EN
Pos.		Part no.	Accessories
5.3		<b>5525355</b>	External rewinder ER 4/300 LM
5.4		<b>5527655</b>	Hose set LM+
5.5		<b>5527585</b>	Mobile cart
5.6		<b>5527675</b>	Console R/L
5.7		<b>5527705</b>	Monitor column

# Delivery program

Pos.	Part no.	Extraction and filter system AF5	
6.1		<b>5907550</b> Extraction and filter system AF5 incl. filter set	
	Scope of delivery	Extraction and filter system AF5 incl. filter set Suction hose Crevice nozzle Power cable Type E+F, 2 m Cable SUB-D25 male/male, 3 m Operator's manual DE / EN	
Pos.	Part no.	Accessories	
6.7		<b>5907570</b> Pre-filter module incl. pre-filter	
6.8		<b>5907537.001</b> Suction hose, 2.5 m	
6.9		<b>5907174.001</b> Crevice nozzle	
6.10		<b>5529354</b> XENO 4 AF5 cable, 3 m	
Pos.	Part no.	Consumables	VPE
6.3		<b>5906555.001</b> Pre-filter mat	10
6.4		<b>5907575.001</b> Pre-filter	1
6.5		<b>5906569.001</b> Filter for suspended particles	1
6.6		<b>5906570.001</b> Active carbon / BAC filter	1

Replacement filters for discontinued extraction and filter systems can be found at [www.cab.de/en/af1](http://www.cab.de/en/af1)

Pos.	Part no.	Spare parts
7.1		<b>5527846.001</b> Plano-spherical lens F-Theta 100.2 69 x 69 mm
7.2		<b>5527847.001</b> Plano-spherical lens F-Theta 160.2 112 x 112 mm
7.3		<b>5527848.001</b> Plano-spherical lens F-Theta 254.2 180 x 180 mm
7.4		<b>5527849.001</b> Plano-spherical lens F-Theta 420.2 290 x 290 mm
7.5		<b>5528305.001</b> Protective glass for F-Theta 100
		<b>5528310.001</b> Protective glass for F-Theta 160 and 254
		<b>5528315.001</b> Protective glass for F-Theta 420

Pos.	Part no.	Accessories
8.1		<b>on request</b> Rotary table module RTM650
8.2		<b>5907189</b> Laser protection window 100 x 200 mm
8.3		<b>5527416</b> Assembly frame 100 x 200 mm
8.4		<b>5527695</b> Linear axis Z400
8.5		<b>on request</b> Linear axis Z200
8.6		<b>5528986</b> Linear axis X230
8.7		<b>5528906</b> Connecting cable X230 XENO 1
8.8		<b>5528987</b> Connecting cable X230 LSG+100E
8.9		<b>5527690</b> Linear axis X400
8.10		<b>5905933</b> Rotary axis D30
		<b>5906350</b> Rotary axis D30.1 incl. connecting cable and axis controller
8.11		<b>5905978</b> 3-jaw chuck D30
8.12		<b>5526156</b> Connecting cable D30
8.13		<b>5528250.001</b> E-stop dongle
8.14		<b>5528368</b> Foot switch
8.15		<b>5527685</b> Axis controller 2S
8.16		<b>5527665</b> Connecting cable 2S
8.17		<b>5527478</b> Adapter cable set FL-PCI
8.18		<b>5527479</b> Adapter cable set FL-TCP
Pos.	Part no.	Software
9.1		<b>5526096.001</b> USB software dongle cabLase Editor 5
9.2		<b>5526094</b> USB software dongle cabLase Editor 5, Save Only

# Overview of cab products

Label printers  
**MACH1, MACH2**



Label printers  
**EOS 2**



Label printers  
**EOS 5**



Label printers  
**MACH 4S**



Label printers  
**SQUIX 2**



Label printers  
**SQUIX 4**



Label printers  
**SQUIX 6.3**



Label printers  
**SQUIX 8.3**



Label printers  
**XD Q double-sided**




Label printers  
**XC Q two-colored**



Print and apply systems  
**HERMES Q**



Print and apply systems  
**Hermes C two-colored**



Tube labeling systems  
**AXON 1**



Print modules  
**PX Q**



Labels and ribbons



Label software  
**cablabel S3**



Label dispensers  
**HS, VS**



Labeling heads  
**IXOR**



Marking lasers  
**XENO 4**



Laser marking systems



Germany  
**cab Produkttechnik GmbH & Co KG**  
Karlsruhe  
Phone +49 721 6626 0  
[www.cab.de](http://www.cab.de)

France  
**cab Technologies S.à.r.l.**  
Niedermodern  
Phone +33 388 722501  
[www.cab.de/fr](http://www.cab.de/fr)

USA  
**cab Technology, Inc.**  
Chelmsford, MA  
Phone +1 978 250 8321  
[www.cab.de/us](http://www.cab.de/us)

Mexico  
**cab Technology, Inc.**  
Juárez  
Phone +52 656 682 4301  
[www.cab.de/es](http://www.cab.de/es)

Taiwan  
**cab Technology Co., Ltd.**  
Taipei  
Phone +886 (02) 8227 3966  
[www.cab.de/tw](http://www.cab.de/tw)

China  
**cab (Shanghai) Trading Co., Ltd.**  
Shanghai  
Phone +86 (021) 6236 3161  
[www.cab.de/cn](http://www.cab.de/cn)

Singapore  
**cab Singapore Pte. Ltd.**  
Singapore  
Phone +65 6931 9099  
[www.cab.de/en](http://www.cab.de/en)

South Africa  
**cab Technology (Pty) Ltd.**  
Randburg  
Phone +27 11 886 3580  
[www.cab.de/za](http://www.cab.de/za)

**cab // 820** distribution and service partners in more than **80** countries

