

Status: 03/2025

cab
we identify more



Linerless
print and apply
systems

HERMES QL

Made in Germany

In detail

Various linerless materials can be processed with a base unit, print rollers and applicators be selected according to an application.

Disposal of liner materials and associated costs are eliminated.

A maximum of 50 percent more labels fit onto a roll, which in turn is easier in transport. System downtimes are reduced due to fewer roll changeovers.

By activating a saving feature, material is cut automatically subsequent to a final print line and an offset.

Full compatibility: Features, dimensions and installation correspond to the tried and tested HERMES Q systems.

A large extent of applicators and assembly assistances can be used in original, HERMES Q standard and QL linerless printers be switched back and forth easily.

Cycle rates correspond to HERMES Q applicators, added by about 50 milliseconds delay time for cutting the linerless labels.



- 1 Metal chassis**
It is the base for component assembly. Made of cast aluminum
- 2 Operation panel**
Intuitive and easy configuration with the help of self-explanatory symbols on the user interface
- 3 Peripheral port**
An applicator can be plugged easily and quickly.
- 4 Applicator**
Pivotable for maintenance or material changeover
- 5 Cutter**
for separating continuous materials

- 6 Unlocking lever**
for pivoting and removing a cutter
Present sensor (not displayed)
for detecting print marks and print materials
- 7 Deflection roller**
Axially adjustable for materials running straight
- 8 Label unwinder**
Labels are unwound with consistent tractive force using a pendulum arm and an integral brake.



Cutter

It separates printed labels even in different heights.

Blade and cutter bar each have anti-stick coating.

The entire cutter can be quickly and easily removed and reinstalled without additional tools in cases of cleaning, changing a print roller or maintaining a print head.

Print head

It is designed for direct thermal printing.

Major data such as operational performance, maximum operation temperature and heating are kept in memory. The data can be read at the premise.

Linerless print roller

Anti-stick coating

InNo-Liner print roller

DR print rollers must be used when processing continuous InNo-Liner material.

Interfaces



- 1 Port for plugging a **SD memory card**
 - 2 **2 USB hosts** for plugging a service key, an USB stick, a keyboard, a barcode scanner, an USB WLAN stick, a warning light, an external control panel
 - 3 **USB 2.0 Hi-Speed device** for plugging a PC
 - 4 **Ethernet 10/100 Mbit/s**
 - 5 **RS232C** 1,200 to 230,400 baud/8 bit
 - 6 **Digital I/O**
SUB-D socket connector, 25 pins, compliant to IEC/EN 61131-2, type 1+3
The inputs and outputs are galvanically isolated and protect from reverse polarity. The outputs are also short-circuit-proof.
- | PNP inputs | PNP, NPN outputs |
|---------------------------|-----------------------------------|
| Start printing / applying | Unit ready |
| Print first label | Print data available |
| Reprint | Initial / upper end position |
| Delete print job | Paper feed ON |
| Label removed | Label peel-off |
| Stop printing / applying | Labeling / lower end position |
| Label feed | Prior warning to label web ending |
| Pause | Label web ending |
| Reset | Collective error |

Options

- 7 **Port for additional interfaces**

Technical data

■ standard □ option

| Label printer | | Type | HERMES QL4.3 | |
|---|---------------------------------|---|-----------------|-------|
| Print method | | | Direct thermal | |
| Print resolution | dpi | 200 | | 300 |
| Print speed | mm/s max. | 300 | | 300 |
| Print width | mm max. | 104 | | 108.4 |
| Print length | mm max. | 13,500 | | 9,000 |
| Direction to which labels are dispensed | | L = to the left, R = to the right | | |
| Print distant to locating edge | mm | 1 | | |
| Material | | | | |
| Continuous linerless material wound onto a roll | | Paper | | |
| Label | Width | mm | 50 - 105 | |
| | Height | mm | 30 - 456 | |
| | Thickness | µm max. | 110 | |
| Unwinder | Roll outside diameter | mm max. | 300 | |
| | core diameter | mm | 76 | |
| | Winding | outside | ■ | |
| Printer dimensions, weights | | | | |
| Width x Height x Depth | | mm | 260 x 400 x 400 | |
| Weight | kg approx. | 13 | | |
| with cover | kg approx. | 15.5 | | |
| Label sensors | | | | |
| Sensor | detecting provided material | | ■ | |
| Reflective | detecting print marks from top | | ■ | |
| | Sensor distant to locating edge | mm | 5 | |
| Electronics | | | | |
| Processor, 32 bit clock rate | MHz | 800 | | |
| RAM | MB | 256 | | |
| IFFS | MB | 50 | | |
| Port for plugging a SD memory card (SDHC, SDXC) | | ■ | | |
| Battery for indicating time and date, real-time clock | | ■ | | |
| Data kept in memory (e.g. serial numbers) when power turns off | | ■ | | |
| Interfaces | | | | |
| RS232-C 1,200 to 230,400 baud / 8 bit | | ■ | | |
| USB 2.0 Hi-Speed device for plugging a PC | | ■ | | |
| Ethernet 10/100 Mbit/s IPv4 and IPv6 | | LPD, RawIP printing, SOAP web service, OPC UA, WebDAV, DHCP, HTTP/HTTPS, FTP/FTPS, TIME, NTP, Zeroconf, SNMP, SMTP, VNC | | |
| 2 USB hosts on the control panel, 2 USB hosts on the back of a unit | | Service key, USB stick, USB WLAN stick, USB WLAN stick with a rod antenna, keyboard, barcode scanner, warning light, external control panel | | |
| USB host, 24 VDC, for peripheral / applicator plugging | | ■ | | |
| Digital I/O interface providing 10 inputs and 11 outputs | | ■ | | |
| Operating data | | | | |
| Voltage | | 100-240 VAC, 50/60 Hz, PFC | | |
| Consumption of power | | < 10 W in standby / 100 W in typical operation / max. 200 W | | |
| Temperature / humidity | Operation | +5 - 40°C / 10 - 85 %, not condensing | | |
| | Stock | 0 - 60°C / 20 - 85 %, not condensing | | |
| | Transport | -25 - 60°C / 20 - 85 %, not condensing | | |
| Approvals | | CE, FCC Class A, ICES-3 | | |
| | in preparation | UKCA, cULus, CB | | |
| | upon request | CCC, BSMI, KC-Mark, Mexico Reg., RCM | | |
| Control panel | | | | |
| Color LCD touchscreen | Diagonal | " | 4.3 | |
| | Resolution Width x Height | px | 272 x 480 | |

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change.
The data provided in the catalog do not represent any warranty or guarantee.

Technical data

■ standard □ option


| Setup options | | |
|---|---|--|
| Print Labels Peel off Apply Interfaces Error | Region: - Language - Country - Keyboard - Time zone Time Display: - Brightness - Power saving mode - Orientation Interpreter | |
| Status bar | | |
| Receive data Record data stream SD memory card plugged USB stick plugged | WLAN Ethernet USB slave Time | |
| Controls | | |
| Labels - prior warning - material provided - material ending | Peripheral error | |
| Print head Voltage Temperature open | Cutter - pivoted - no final position | |
| Test routines | | |
| System diagnostics | upon startup, detection of print head included | |
| Information display, test printout, analysis | Status printout Fonts list List of units WLAN status Print data recorded on memory card | Test grid Label profile List of events Monitor mode |
| Status reports | - Printout of print durations, running hours, etc. - Status of a unit requested by software command - Display of errors related to a network, barcode or peripheral device, links missing, etc. | |
| Fonts | | |
| Integral | 5 bitmap fonts: 12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B | 7 vector fonts: AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721, Bold |
| For memory | TrueType | |
| Sets of characters | Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869 EBCDIC 500 ISO 8859-1 to -10 and -13 to -16 WinOEM 720 UTF-8 DEC MCS | |
| | MacRoman KOI8-R | |
| | Western European Eastern European Chinese, simplified Chinese, traditional Thai | Cyrillic Greek Latin Hebrew Arabic |
| Bitmap | 1 mm to 3 mm wide and high Zoom factors 2 to 10 0°, 90°, 180°, 270° orientations | |
| Vector / TrueType | 0.9 mm to 128 mm wide and high Continuous zoom 360° orientation in steps of 1° | |
| Styles | bold, italic, underlined, outline, inverse - depending on the font type | |
| Character spacing | proportional or monospace | |
| Graphics | | |
| Elements | lines, arrows, rectangles, circles, ellipses - filled and gradient | |
| Formats | PCX, IMG, BMP, TIF, MAC, GIF, PNG | |







| Codes | | |
|--|--|---|
| 1D barcodes, linear | Code 39, Code 93 Code 39 Full ASCII Code 128 A, B, C EAN 8, 13 EAN/UCC 128/GS1-128 EAN/UPC Appendix 2 EAN/UPC Appendix 5 FIM HIBC | Interleaved 2/5 Ident and routing code of Deutsche Post Codabar JAN 8, 13 MSI Plessey Postnet RSS 14 UPC A, E, E0 |
| 2D codes, stacked codes | DataMatrix DataMatrix Rectangle Extension QR code Micro QR code rMQR code GS1 QR code GS1 DataMatrix GS1 Digital Link (QR and DataMatrix) PDF 417 Micro PDF 417 UPS MaxiCode GS1 DataBar Aztec Codablock F Dotcode RSS 14 truncated, limited, stacked, omni-directional | All codes may vary in height, modular width and ratio. 0°, 90°, 180°, 270° orientations Feasibility of check digits, plain text printouts and start/stop coding depending on the type of code |
| Software | | |
| Label software | cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print | ■ ■ □ □ |
| Running also with | CODESOFT Loftware Spectrum NiceLabel BarTender | in preparation |
| Stand-alone operation | | ■ |
| Windows printer drivers certified WHQL for | Windows 10 Windows 11 | Server 2016 Server 2019 Server 2022 |
| Apple printer drivers | Mac OS X 10.6 or any later release | |
| Linux printer drivers | CUPS 1.2 or any later release | |
| Programming | JScript printer language abc Basic Compiler ZPL II (Datastream be tested in advance) | ■ ■ □ |
| Integration | SAP Database Connector | ■ ■ |
| Administration | Printer control Configuration on the Intranet and Internet | ■ ■ |

Free and Open Source software in cab products:



www.cab.de/opensource


HERMES QL accessories

| | | |
|-----|--|--|
| 2.1 |  | SD memory card |
| 2.2 |  | USB stick |
| 2.3 |  | USB WLAN stick 2.4 GHz 802.11b/g/n Hotspot mode or infrastructure mode |
| 2.4 |  | USB WLAN stick with a rod antenna for extended range of operation 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac Hotspot mode or infrastructure mode |
| 2.6 |  | Product sensor, 3 pins to be attached to a front side applicator, a vacuum belt applicator or an air jet box. Labels are triggered to be applied as soon as a product has been detached, e.g. on a conveyor belt. |
| 2.7 |  | Product sensor, 25 pins Labels are triggered to be applied as soon as a product has been detached, e.g. on a conveyor belt. |
| 2.8 |  | I/O interface plug, SUB-D, 25 pins All control signals are plugged to the I/O interface |
| 2.9 |  | Warning light States are indicated in addition to the information on the display of a printer. Red Collective error Yellow Prior warning to a label material ending Green Unit ready USB cable (1 m) for connecting to HERMES QL Assembly materials are provided only for vertical printer installation. 1 Chassis assembly 2 Bracket assembly |

| | | |
|------|---|--|
| 2.10 |  | External control panel If the control panel of a printer cannot be accessed, an additional external one can be plugged. Same functionality as on a printer Landscape mode or portrait mode Operability as targeted, either on an external panel or on a printer |
| |  | USB 2.0 Hi-Speed device for connecting to a printer cab provides specified USB cables for power supply. Lengths 1.8 m to 16 m |
| 2.11 |  | Label selection - I/O box A maximum of 16 labels per box can be selected from a memory card by a superior control unit, such as a PLC. |
| 2.12 |  | TR2 hand switch for plugging to an I/O interface |
| 2.13 |  | Foot switch for plugging to an I/O interface |
| 2.14 |  | Connecting RS232-C cable 9/9 pins, 3 m |

HERMES QL options


| | | |
|-----|---|---|
| 3.1 |  | Cover A hinged cover with a large inspection window protects the material and the print head from contamination. Installation: vertical, rotated by $\pm 90^\circ$, horizontal |
| 3.2 |  | 2 port Ethernet switch 10/100 Mbit/s for plugging another terminal device in a joint network. Signals are looped through. |

| | | |
|-----|---|---|
| 3.3 |  | Print roller DR4 for continuous InNo-Liner material |
|-----|---|---|

cablabel S3 software

Design, print, administrate

cablabel S3 opens up the full potential of cab devices. Defining a label is first. Modular design adapts cablabel S3 to requirements step by step. Plug-ins are embedded. Native JScript programming, for example, is supported by the JScript Viewer. The designer user interface and JScript codes synchronize in real time. Optional features can be integrated, such as the Database Connector or barcode verifiers.

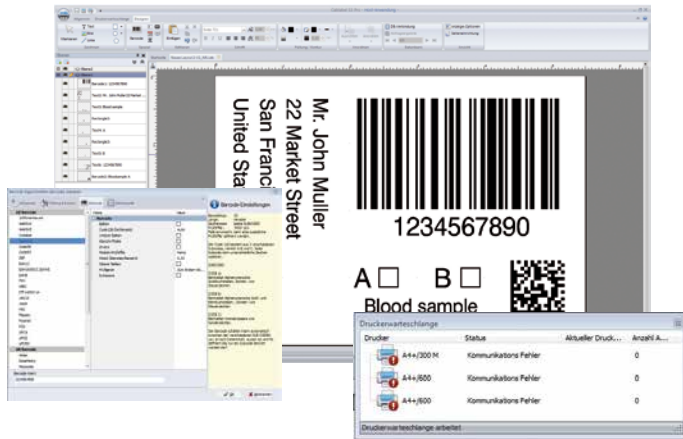

See further information on www.cab.de/en/cablabel

Stand-alone operation

This operating mode enables a printer select and print labels while not connected to a host system. Labels can be designed using software such as cablabel S3 or a text editor on a PC. Label formats, texts, graphics and data of a database can be stored on a memory card, a USB stick or a printer's IFFS memory. Only variable data are sent by a keyboard, a barcode scanner, a scale or any other host system to a printer, or be recalled by the Database Connector from a host and printed.



Printer control

Drivers



cab provides drivers for controlling a printer with software other than cablabel S3.



Free download on www.cab.de/en/support



Programming



JScript

cab printers embed JScript language.

Download free manual on www.cab.de/en/programming



abc Basic Compiler

Integral to the firmware, abc in addition to JScript enables advanced programming before data are edited for printout. For example, external printer languages can be replaced without intervening in a print job in progress. Data may be imported as well from other systems such as scales, barcode scanners or PLC.

Connecting to SAP®

Labels can be printed from SAP¹⁾ on cab devices and systems. There are various methods:

- Printing with SAPscript
- Printing with SmartForms
- Printing with Adobe Interactive Forms

See instructions in detail on www.cab.de/en/sap

Database Connector



Printers in a network may access data from an ODBC / OLEDB database and print it on labels. Data can be rewritten to a database while print jobs are in progress.

Printer administration

Configuration on the Intranet and Internet



Integral HTTP / FTP servers enable a printer be controlled or configured, firmware be updated and memory cards be administrated using standard applications such as a web browser or a FTP client. Administrators and operators on behalf of SNMP / SMTP are notified of states, alerts and errors by email or SNMP diagrams. Time and date are synchronized by a time server.

OPC UA



All the latest cab printers have been designed ready for interacting with machines and components of different manufacturers in industrial plants. An OPC UA server is part of the firmware.

See further information on www.cab.de/en/opcu

¹⁾ SAP and associated logos are trademarks or registered trademarks of SAP SE.

Linerless / InNo-Liner applicators



Automatic labeling

HERMES HQ / HQI applicators are a further development of the proven HERMES applicators, fully compatible, adding extra functions. Existing applications can continue without limitations.

Easy to configure

The applicator can be fully set on the printer control panel, configurations be stored and called up. Automatic calibration features speed up the setup.

Process control

Detailed statistical values are provided, so are sophisticated error messages. Constant control enables response right away in events of errors.

Updates

Applicator firmware can be updated on the printer control panel or the printer's web server. New features and specific solutions can therefore be tested right away and distributed in the field.

1 Long product life

by a precise and low-wear linear guide

2 Products of variable heights

Labels can be applied on different heights using a stroke cylinder. Its standard lengths are 200, 300, 400 and 600 mm.

3 Protective chassis

is a standard to protect the cylinder and the guide. It can be provided adapted to the product jig on a labeling workstation.

4 Highly reliable processes

Support air and intake air can be defined, so can stroke speed. Sensor control

5 Label application

in real time. Small or large labels, 30 to 456 mm high and 50 to 105 mm wide, can be processed using an applicator

6 Pivoting applicator

The print mechanics can be accessed quickly and easily in case of maintenance or if materials have to be replaced.

Options:

Pressure-reducing valve

It reduces the pressure exerted by the stroke cylinder to a product.

Pressure-reduced applicator

It has been designed for manual workstations missing a protective cover. The cylinder diameter is reduced to 12 mm. To prevent from injuries, a safety valve limits compressed air to a maximum of 4.8 bar.




Applicators, transfer modules and options


Overview

| Applicators | Liner-less | InNo-Liner | Page | HERMES QL4.3 | Universal pad with sliding foil | Tamp-on pad with sliding foil | Blow-on pad with sliding foil | Tamp-on pad, spring-mounted | Universal pad, spring-mounted with sliding foil | Tamp-on pad, spring-mounted with sliding foil | Roll-on pad with sliding foil | Corner-wrap pad with sliding foil | Transportation belt | Vacuum pad | Pressure-reducing valve | Pressure-reduced applicator |
|------------------------|--------------------------|--------------------------|-------|--------------|---------------------------------|-------------------------------|-------------------------------|-----------------------------|---|---|-------------------------------|-----------------------------------|--------------------------|--------------------------|--------------------------|-----------------------------|
| | | | | Order code | 11 | 11 | 21 | 30 | 31 | 31 | 41 | 51 | 90 | .212 | .220 | |
| Front side applicator | <input type="checkbox"/> | | 12 | HQ 3014 | | <input type="checkbox"/> | <input type="checkbox"/> | | | <input type="checkbox"/> | | | | | | |
| Stroke applicator | <input type="checkbox"/> | | 14/15 | HQ 4014 | <input type="checkbox"/> | F | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | | | <input type="checkbox"/> | <input type="checkbox"/> |
| Stroke applicator | <input type="checkbox"/> | | 10 | HQ 4024 | | | | <input type="checkbox"/> | | | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| Stroke applicator | | <input type="checkbox"/> | 11 | HQI 4034 | | | | <input type="checkbox"/> | | | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| Stroke blow applicator | <input type="checkbox"/> | | 13 | HQ 4614 | | | <input type="checkbox"/> | | | | | | | | | |
| Vacuum belt applicator | <input type="checkbox"/> | | 16 | HQ 5314 | | | | | | | | | <input type="checkbox"/> | | | |
| | <input type="checkbox"/> | | 17 | HQ 5414 | | | | | | | | | <input type="checkbox"/> | | | |
| Air jet box | <input type="checkbox"/> | | 18 | HQ 6114 | | | | | | | | | | <input type="checkbox"/> | | |

Applicator type code index

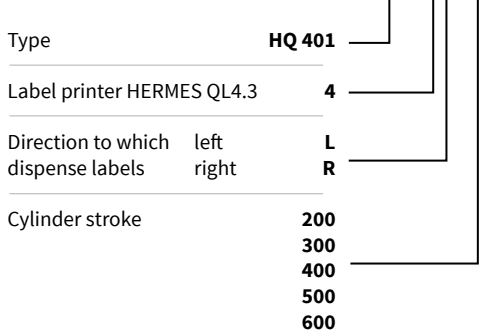

Transfer module type code index

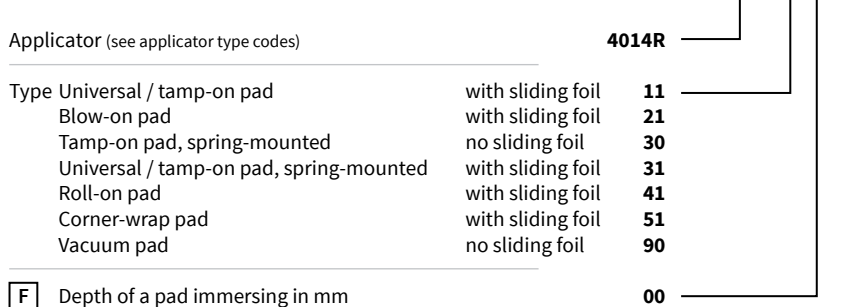

A pad dips into a surface in the range of a label. See specified depths of immersion in the technical data of an applicator.

HQ 4024 stroke applicators for linerless

- As much as 90 percent savings of compressed air
- Labels applied onto variable heights using one tamp pad

Labels are applied in real time onto packages of different heights.

A spring-mounted tamp pad enables labels be applied reliably even onto inclined surfaces. Three pads are provided for labels as high as 30 mm to 100 mm, 150 mm and 200 mm. Labels may be 50 mm to 105 mm wide in each case.

Labels are sucked by an electrically driven fan.
Only the stroke cylinder requires compressed air.



Accessory

5.14 Unit to regulate compressed air




Option

5.17 Pressure-reducing valve



| Stroke applicator | | HQ 4024 L/R-200 | HQ 4024 L/R-300 | HQ 4024 L/R-400 | HQ 4024 L/R-600 |
|---|--------------------|---|-----------------|-----------------|-----------------|
| Distance of a package to the bottom of a unit | mm max. | 135 | 235 | 335 | 535 |
| Package height | mm | variable | | | |
| Alternation in the height of packages | mm max. | 100 | 200 | 300 | 500 |
| Direction from which labels are applied | | from the top, from below, from the side | | | from the top |
| State of a package at the moment a label is applied | | at rest | | | |
| Control | Sensor 1 | initial / upper end position | | | |
| | Sensor 2 | label on tamp-on pad | | | |
| | Sensor 3 | labeling / lower end position | | | |
| Consumption of power | W max. | 30 | | | |
| Compressed air | bar | 4.5 | | | |
| Cycle rate ¹⁾ | labels/min approx. | 30 | | | |

¹⁾ calculated using a stroke of 100 mm below a unit, labels 40 mm high, a print speed of 100 mm/s

| | | |  |  |  |
|-----------------------------|-----------|----|---|--|---|
| Tamp-on pad, spring-mounted | | | 4024-3000 105 x 100 | 4024-3000 105 x 150 | 4024-3000 105 x 200 |
| Label | Width | mm | 50 - 105 | 50 - 105 | 50 - 105 |
| | Height | mm | 30 - 100 | 80 - 150 | 120 - 200 |
| | Thickness | µm | 110 | 110 | 110 |

HQI 4034 stroke applicators for InNo-Liner

- As much as 90 percent savings of compressed air
- Labels applied onto variable heights using one tamp pad

Labels are applied in real time onto packages of different heights.

A spring-mounted tamp pad enables labels be applied reliably even onto inclined surfaces. Three pads are provided for labels as high as 30 mm to 100 mm, 150 mm and 200 mm. Labels may be 50 mm to 105 mm wide in each case.

Labels are sucked by an electrically driven fan.
Only the stroke cylinder requires compressed air.



Accessory

5.14 Unit to regulate compressed air

Option

5.17 Pressure-reducing valve

4.2



| Stroke applicator | | HQI 4034 L/R-200 | HQI 4034 L/R-300 | HQI 4034 L/R-400 | HQI 4034 L/R-600 |
|---|--------------------|-------------------------------|------------------|------------------|------------------|
| Distance of a package to the bottom of a unit | mm max. | 135 | 235 | 335 | 535 |
| Package height | mm | variable | | | |
| Alternation in the height of packages | mm max. | 100 | 200 | 300 | 500 |
| Direction from which labels are applied | from the top | ■ | ■ | ■ | ■ |
| State of a package at the moment a label is applied | | at rest | | | |
| Controls | Sensor 1 | initial / upper end position | | | |
| | Sensor 2 | label on tamp-on pad | | | |
| | Sensor 3 | labeling / lower end position | | | |
| Consumption of power | W max. | 30 | | | |
| Compressed air | bar | 4.5 | | | |
| Cycle rate ¹⁾ | labels/min approx. | 25 | | | |



¹⁾ calculated using a stroke of 100 mm below a unit, labels 40 mm high, a print speed of 100 mm/s

| Tamp-on pad, spring-mounted | | | 4024-3000 105 x 100 | 4024-3000 105 x 150 | 4024-3000 105 x 200 |
|-----------------------------|-----------|----|---------------------|---------------------|---------------------|
| Label | Width | mm | 50 - 105 | 50 - 105 | 50 - 105 |
| | Height | mm | 30 - 100 | 80 - 150 | 120 - 200 |
| | Thickness | µm | 110 | 110 | 110 |

HQ 3014 front side applicators for linerless

Labels are applied in real time preferably from the top or from the side onto the front or back of packages in motion.

The pad locates in front of the peel-off plate. Printed labels are taken over and set onto packages by a rotary cylinder. A sensor detects each package and triggers the pivot arm / pad to its initial position.

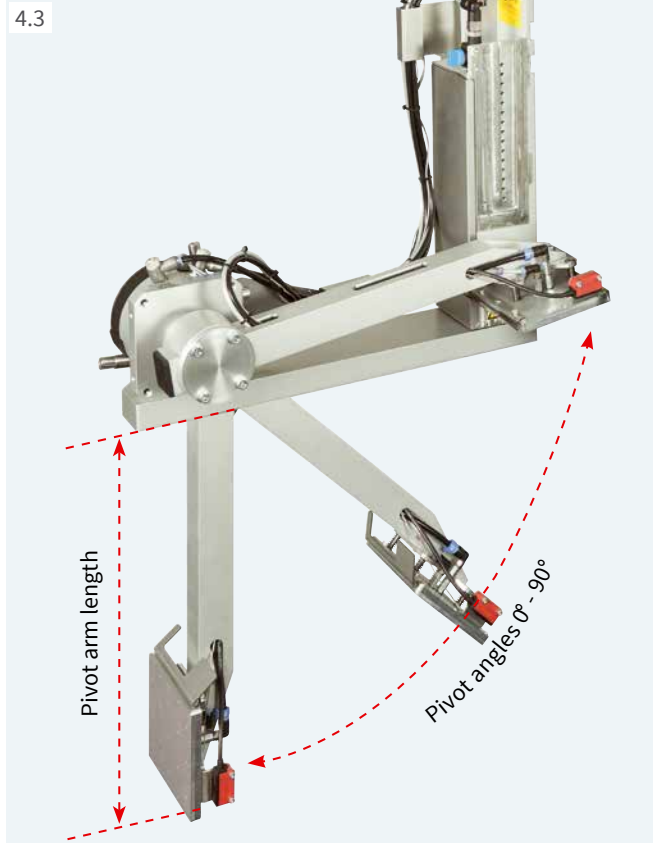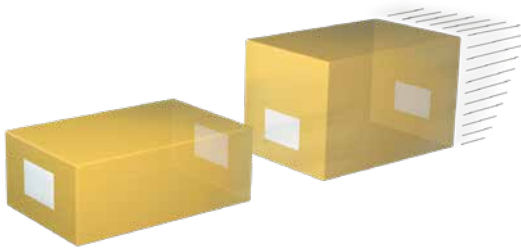

Accessories

5.13 **Blow tube**

5.14 **Unit to regulate compressed air**

| Front side applicator | HQ 3014 L/R-200 | HQ 3014 L/R-300 | HQ 3014 L/R-400 | HQ 3014 L/R-600 | |
|---|--|-----------------|-----------------|-----------------|------|
| State of a package | at rest | | ■ | | |
| at the moment a label is applied | in motion | | ■ | | |
| Direction from which labels are applied | from the top, from the side, from the front, from the back | | | | |
| Package height | variable | | ■ | | |
| Pivot arm length ¹⁾ | mm | 200 | 300 | 400 | 600 |
| Pivot angle | | | 0° - 90° | | |
| Weight of applicator | packaging excluded kg | 9 | 9.5 | 10.5 | 11.5 |
| Consumption of power | W max. | | 15 | | |
| Compressed air | bar | | 4.5 | | |
| Cycle rate ²⁾ | labels/min approx. | | 15 | | |

¹⁾ Pivot arm length defines the targeted spot of a label (lower margin) set 90° below a HERMES QL footprint.

²⁾ calculated using a pivot arm 200 mm long, labels 100 mm high, a print speed of 100 mm/s



Tamp-on pad

Labels are precisely tamped onto plane, even recessed, surfaces.



Tamp-on pad, spring-mounted

Labels are applied onto surfaces inclined as much as 15° using a spring-mounted vacuum plate. Height within a label area may vary by 10 mm.



Blow-on pad


Labels are blown onto the surfaces of packages by a blast of air, bridging a distance of 5 mm to 10 mm.

| Transfer module | | Tamp-on pad 3014 L/R 1100 | Tamp-on pad, spring-mounted 3014 L/R 3100 | Blow-on pad 3014 L/R 2100 | |
|-----------------|--------------|------------------------------|--|------------------------------|----------|
| Label width | HERMES QL4.3 | mm | 50 - 105 | 80 - 105 | 50 - 105 |
| Label height | | mm | 30 - 250 | 80 - 250 | 30 - 100 |

HQ 4614 stroke blow applicators for linerless

Labels are applied in real time from all sides onto packages of various heights in motion.

The pad locates in front of the peel-off plate. Printed labels are taken over. A sensor triggers the stroke cylinder direct the pad to a target spot approximately 10 mm above a package. The length of the stroke cylinder defines how far packages may differ in heights.

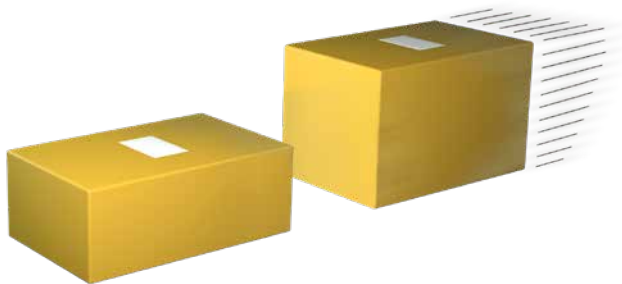

Accessories

5.13 **Blow tube**

5.14 **Unit to regulate compressed air**

4.4



| Stroke blow applicator | | HQ 4614 L/R-200 | HQ 4614 L/R-300 | HQ 4614 L/R-400 |
|---|-----------------------|---|-----------------|-----------------|
| Distance of a package to the bottom of a unit | mm max. | 140 | 240 | 340 |
| Package height | variable | ■ | | |
| Direction from which labels are applied | | from the top, from below, from the side | | |
| State of a package at the moment a label is applied | at rest in motion | ■ ■ | ■ ■ | ■ ■ |
| Weight of applicator | packaging excluded kg | not specified | 5.5 | 6.5 |
| Consumption of power | W max. | | 15 | |
| Compressed air | bar | | 4.5 | |
| Cycle rate ¹⁾ | labels/min approx. | | 25 | |

¹⁾ calculated using a stroke of 100 mm below a unit, labels 100 mm high, a print speed of 100 mm/s

Blow-on pad

Labels are blown onto the surfaces of packages by a blast of air, bridging a distance of 5 mm to 10 mm.



| Blow-on pad | | | 4614L/R-2100 W x H |
|--------------|--------------|----|--------------------|
| Label width | HERMES QL4.3 | mm | 50 -105 |
| Label height | HERMES QL4.3 | mm | 30 -100 |

HQ 4014 stroke applicators for linerless

Labels are applied in real time preferably onto packages. The type of pad defines whether a package has to be at rest or may be in motion at the time a label is applied. Labels can be applied from all sides.

The pad locates in front of the peel-off plate. Printed labels are taken over and set onto packages by a stroke cylinder. A sensor detects each package and triggers the pad to its initial position.

The length of the stroke cylinder defines the maximum distance of a package to the peel-off plate.



Accessories

5.13 **Blow tube**

5.14 **Unit to regulate compressed air**

Options

5.17 **Pressure-reducing valve**

5.18 **Pressure-reduced applicator**

4.5



| Stroke applicator | | HQ 4014L/R-200 | HQ 4014L/R-300 | HQ 4014L/R-400 | HQ 4014L/R-600 |
|---|-----------------------|---|----------------|----------------|--------------------------|
| Package height | variable | | | ■ | |
| State of a package at the moment a label is applied | at rest | | | ■ | |
| Direction from which labels are applied | | from the top, from below, from the side | | | from the top, from below |
| Distance of a package to the bottom of a unit | mm max. | 130 | 230 | 330 | 530 |
| Weight of applicator | packaging excluded kg | 5 | 5 | 7 | 9 |
| Consumption of power | W max. | | | 15 | |
| Compressed air | bar | | | 4.5 | |
| Cycle rate ¹⁾ | labels/min approx. | | | 25 | |

¹⁾ calculated using a stroke of 100 mm below a unit, labels 100 mm high, a print speed of 100 mm/s



Tamp-on pad

Labels are precisely tamped onto plane, even recessed, surfaces.

Universal pad

Labels are tamped onto flat surfaces. Drilled vacuum holes (in gaps of 5 mm) for sucking labels are covered by sliding foil and can be opened according to a label size using a perforation tool. Delivery includes two extra foils for replacement.

Tamp-on pad, spring-mounted

Labels are applied onto surfaces inclined as much as 15° using a spring-mounted vacuum plate. Height within a label area may vary by 10 mm.

Universal pad, spring-mounted

Labels are applied onto surfaces inclined as much as 15° using a spring-mounted vacuum plate. Height within a label area may vary by 10 mm. Drilled vacuum holes (in gaps of 5 mm) for sucking labels are covered by sliding foil and can be opened according to a label size using a perforation tool. Delivery includes two extra foils for replacement.

| Transfer module | | Tamp-on pad | Universal pad | Tamp-on pad, spring-mounted | Universal pad, spring-mounted |
|--|--------------|----------------------|----------------------|-----------------------------|-------------------------------|
| | | 4014 L/R 11 F | 4014 L/R 1100 | 4014 L/R 3100 | 4014 L/R 3100 |
| Label width | HERMES QL4.3 | mm | 50 -105 | 75 / 90 | 80 -105 |
| Label height | HERMES QL4.3 | mm | 30 -210 | 60 / 90 | 80 -210 |
| Depth of a pad immersing F ²⁾ | | mm max. | 140 | - | - |


²⁾ on a cover HERMES QL2/QL4/QL4.3, dimension F standard 60 mm (100 mm an option, a maximum of 120 mm upon request)

HQ 4014 stroke applicators for linerless

Labels are applied in real time onto packages.
 The type of pad defines whether a package has to be at rest or may be in motion at the time a label is applied.
 Labels can be applied from all sides.

The pad locates in front of the peel-off plate. Printed labels are taken over and set onto packages by a stroke cylinder.
 A sensor detects each package and triggers the pad to its initial position.

The length of the stroke cylinder defines the maximum distance of a package to the peel-off plate.



Accessories

- 5.13 **Blow tube**
- 5.14 **Unit to regulate compressed air**

Options

- 5.17 **Pressure-reducing valve**
- 5.18 **Pressure-reduced applicator**



| Stroke applicator | HQ 4014L/R-200 | HQ 4014L/R-300 | HQ 4014L/R-400 | HQ 4014L/R-600 |
|--|---|----------------|----------------|----------------|
| State of a package at rest | Blow-on pad, corner-wrap pad | | | |
| at the moment a label is applied in motion | Blow-on pad, roll-on pad | | | |
| Direction from which labels are applied from the top | Blow-on pad, roll-on pad, corner-wrap pad | | | |
| from below | Blow-on pad, roll-on pad | | | |
| from the side | Blow-on pad, Roll-on pad | | | |
| Distance of a package to the bottom of a unit | 140 | 240 | 340 | 540 |
| Blow-on pad mm max. | | | | |
| Roll-on pad mm max. | 160 | 260 | 360 | 560 |
| Corner-wrap pad mm max. | 100 | 200 | 300 | 500 |
| Package height uniform | Blow-on pad | | | |
| variable | Blow-on pad, corner-wrap pad | | | |
| Weight of applicator packaging excluded kg | 5 | 5 | 7 | 9 |
| Consumption of power W max. | 15 | | | |
| Compressed air bar | 4.5 | | | |
| Cycle rate ¹⁾ labels/min approx. | 25 | | | |

¹⁾ calculated using a stroke of 100 mm below a unit, labels 100 mm high, a print speed of 100 mm/s



Blow-on pad

Labels are blown onto sensitive surfaces or packages in motion by a blast of air.
 Distances of 5 mm to 10 mm to of a package are set by a stop on the stroke cylinder.



Roll-on pad

Labels are rolled onto plane packages in motion.



Corner-wrap pad

Labels are applied to two adjacent sides of a package. The pad applies the first half of a label onto the top of the package. The second half is then rolled on.

| Transfer module | | Blow-on pad 4014 L/R 2100 | Roll-on pad 4014 L/R 4100 | Corner-wrap pad 4014 L/R 5100 |
|-----------------|--------------|------------------------------|------------------------------|----------------------------------|
| Label width | HERMES QL4.3 | mm | 50 - 105 | 50 - 105 |
| Label height | HERMES QL4.3 | mm | 30 - 100 | 60 - 210 |

HQ 5314 vacuum belt applicators for linerless

Labels can be applied in real time from all sides onto plane packages in motion.

The applicator locates in front of the peel-off plate. Printed labels are guided along a vacuum belt to a target point. Applications onto packagings are triggered by an external signal.



| Vacuum belt applicator | | HQ 5314-2 | HQ 5314-3 | HQ 5314-4 |
|--|-----------------------|---|-----------|-----------|
| Label application | | onto plane surfaces | | |
| Direction to which dispense labels | | left and right | | |
| Label width | HERMES QL4.3 mm | 20 - 114 | 20 - 114 | 20 - 114 |
| Label height | mm | 60 - 256 | 60 - 356 | 60 - 456 |
| State of a package at the moment a label is applied | in motion | ■ | | |
| Direction from which labels are applied | | from the top, from below, from the side | | |
| Package height | uniform | ■ | | |
| Package speed | m/s max. | 0.5 | | |
| Gap between packages | m at least | 0.5 | | |
| Vacuum belt speed ¹⁾ | mm/s | 100 - 500 | | |
| Weight of applicator | packaging excluded kg | 7 | 7 | 7 |
| Consumption of power | W max. | 90 | | |
| Cycle rate ²⁾ | labels/min max. | 30 | | |
| Distance of a label to the belt, when applying from the side | mm | Y = 20 | | |

¹⁾ The speed of a package must be at least as high as the speed of the vacuum belt.

²⁾ calculated using labels 100 mm high and a print speed of 250 mm/s

HQ 5414 vacuum belt applicators for linerless

Labels can be applied from the top or from the side onto cylindric packages in motion. Corner-wrap applications are as well possible.

The applicator locates in front of the peel-off plate. Printed labels are guided along a vacuum belt to a target point. Applications onto packagings are triggered by an external signal.



| Vacuum belt applicator | | HQ 5414-3 | HQ 5414-4 |
|--|-----------------------|--------------------------------------|-----------|
| Label application | | onto cylindric surfaces, corner-wrap | |
| Direction to which dispense labels | | left and right | |
| Label width | HERMES QL4.3 mm | 20 - 114 | 20 - 114 |
| Label height | mm | 80 - 356 | 80 - 456 |
| State of a package at the moment a label is applied | in motion | ■ | |
| Direction from which labels are applied | | from the top, from the side | |
| Package height | uniform | ■ | |
| | variable | ■ | |
| Package speed | m/s max. | 0.3 | |
| Gap between packages | m at least | 0.5 | |
| Steadiness at application level | | F ¹⁾ = 30 N | |
| Corner-wrap label application | mm max. | X = 160 | |
| Vacuum belt speed ²⁾ | mm/s | 100 - 300 | |
| Weight of applicator | packaging excluded kg | 7 | 7 |
| Consumption of power | W max. | 90 | |
| Cycle rate ³⁾ | labels/min max. | 15 | |
| Distance of a label to the belt, when applying from the side | mm | Y = 20 | |

¹⁾ F = force required for pivoting vacuum belt

²⁾ The speed of a package must be at least as high as the speed of the vacuum belt.

³⁾ calculated using labels 100 mm high and a print speed of 250 mm/s


HQ 6114 air jet box for linerless

Labels are applied onto packages in motion or at rest. Each label is sucked by a fan and blown off by an aligned blast of air. Subject to the size of a label, distances as wide as 200 mm can be bridged between a package and the peel-off plate.

1 Template

for covering all vacuum and blow-off drillings next to a label

Pre-scored in an 8 mm x 8 mm pattern, they can be easily adapted to the size of a label. All areas next to a label are covered when inserting between a vacuum block and slide rails. Delivery includes five templates.

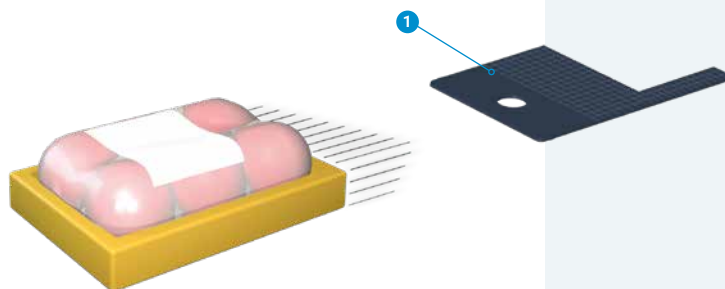

Accessories

Blow tube

Unit to regulate compressed air, providing a shut-off valve

| Air jet box | | | HQ 6114 L/R |
|---|--------------|-----------------------|---|
| Label width | HERMES QL4.3 | mm | 50 -114 (smaller sizes upon request) |
| Label height | | mm | 50 -125 (smaller sizes upon request) |
| State of a package | | at rest | ■ |
| at the moment a label is applied | | in motion | ■ |
| Direction from which labels are applied | | | from the top, from below, from the side |
| Package height | | variable | ■ |
| Distance of a package to peel-off plate | | mm max. | 200 |
| Weight of air jet box | | packaging excluded kg | 4 |
| Consumption of power | | W max. | 90 |
| Compressed air | | bar | 4.5 |
| Cycle rate ¹⁾ | | labels/min max. | 60 |

¹⁾ calculated using labels 50 mm high, a print speed of 250 mm/s, a blast of air lasting 100 ms, with packages located 100 mm to the peel-off plate

Continuous linerless materials

Linerless RL540

On packaging of all kinds in industry and logistics

InNo-Liner IDL

On absorbent cardboard and paper surfaces, such as shipping labels in logistics

All materials are free from bisphenols and suit for use in food business.



- CO² neutral
- waste is avoided




| Material | Linerless RL540 | InNo-Liner IDL |
|-------------------------|-----------------------------|-----------------------------|
| Type | Direct thermal paper, white | Direct thermal paper, white |
| Thickness | approx. 80 µm | 84 µm |
| Adhesive | self-adhesive | triggered by water |
| Grip | permanent | permanent |
| Food recommendation | not specified | BfR XXXVI |
| Application temperature | from 5°C | 10°C - 30°C |
| Service | | |
| - Temperature | -10°C - 100°C | -20°C - 50°C |
| - Humidity | not specified | 20 % - 85 %, not condensing |
| Shelf life | 12 months | 24 months ¹⁾ |
| - Temperature | 23°C ± 5°C | 20°C - 25°C |
| - Humidity | 50 % ± 10 % | 40 % - 50 %, not condensing |
| Application | indoor | indoor |

¹⁾ subsequent to date of manufacture; warehouse conditions as defined by FINAT


| Material | Item no. | Material width mm | Material length m | Roll diameter mm | Core diameter mm | Winding |
|---------------------------------|----------------|-------------------|-------------------|------------------|------------------|---------|
| Linerless RL540, 58 mm x 700 m | 5780400 | 58 | 700 | 300 | 76 | outside |
| Linerless RL540, 80 mm x 700 m | 5780401 | 80 | 700 | 300 | 76 | outside |
| Linerless RL540, 105 mm x 700 m | 5780402 | 105 | 700 | 300 | 76 | outside |
| InNo-Liner IDL, 60 mm x 750 m | 5780300 | 60 | 750 | 300 | 76 | outside |
| InNo-Liner IDL, 80 mm x 750 m | 5780301 | 80 | 750 | 300 | 76 | outside |
| InNo-Liner IDL, 100 mm x 750 m | 5780302 | 100 | 750 | 300 | 76 | outside |

In comparison


Adhesive label with a liner

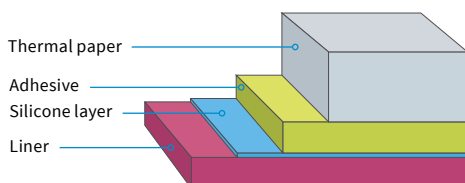

Linerless RL540

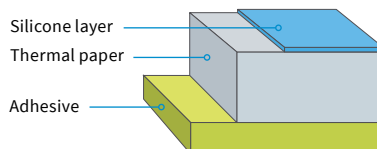

InNo-Liner IDL

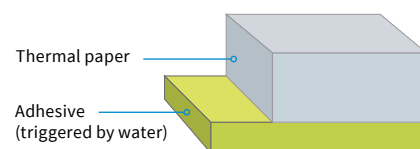

Applicator accessories

5.13



Blow tube

to provide support air. To assist label transfer, the label is blown from below to the pad.

Provided for 2", 4" or 6" label applications

5.14



Unit to regulate compressed air

4.5 bar default setting

Provided in a left-hand or right-hand design

Delivery includes a fine filter, a pressure control valve with a display, a hose to connect to an applicator's compressed air input and material to assemble the unit to a chassis or a bracket.

5.16



Unit to regulate compressed air, providing a shut-off valve to vent a hose line subsequent to the unit

Provided in a left-hand or right-hand design

5.17



Pressure-reducing valve

It reduces the pressure exerted by the stroke cylinder to an item.

5.18



Pressure-reduced applicator

It has been designed for manual workstations missing a protective cover. The cylinder diameter is reduced to 12 mm. To prevent from injuries, a safety valve limits compressed air to a maximum of 4.8 bar.

HERMES QL assembly assistance



Mount

for desktop setup or installation into production lines
 Provided in a left-hand or right-hand design

The size can be individually adapted to any operation.

6.1

1 Adapter plate

for fixing a print and apply system.

Alternatively, a system can be assembled directly into a production line, using the adapter plate and a profile.

6.2

2 Profile

Aluminum square

Standard lengths 40, 80, 120, 160, 200, 300 mm

6.3

3 Base plate


for fixing a product jig

Standard dimensions 500 mm x 255 mm

6.4

4 Base plate, xy stop and product sensor included


Standard dimensions 500 mm x 255 mm

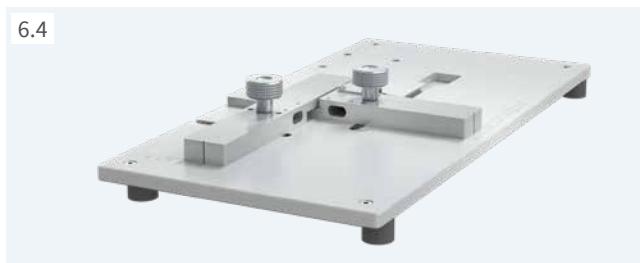


HERMES QL assembly assistance



Bracket
to assemble to a floor stand

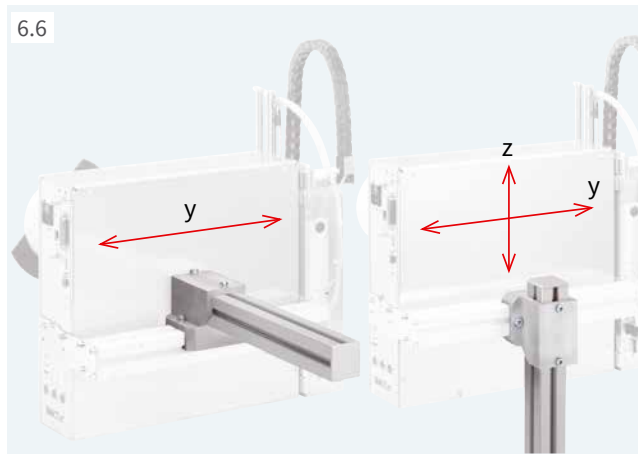


Clamped joint designed for a 50 x 50 mm profile
to move in horizontal or vertical direction

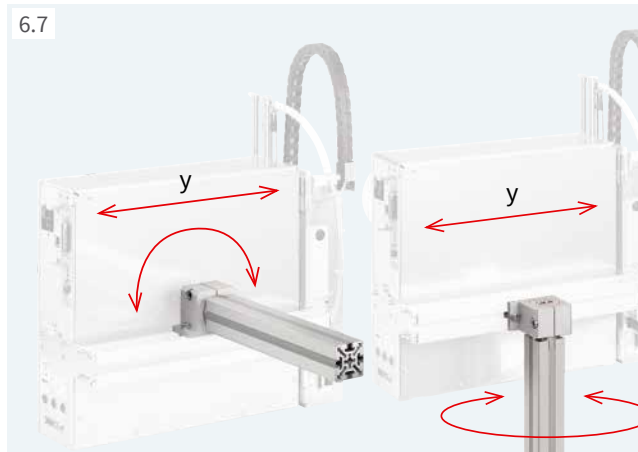


Flanged joint designed for a 50 x 50 mm profile
to move in horizontal direction or rotate around an axis

HERMES QL installation


Applying labels in direction of transport
from the top from the side

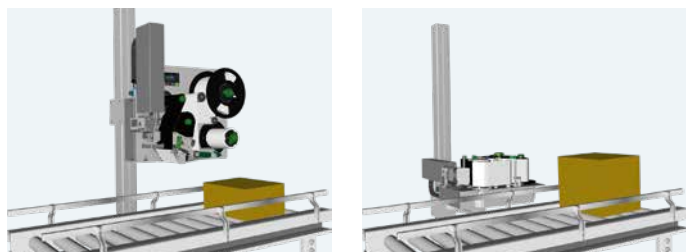

Applying labels crosswise the direction of transport
from the top from the side

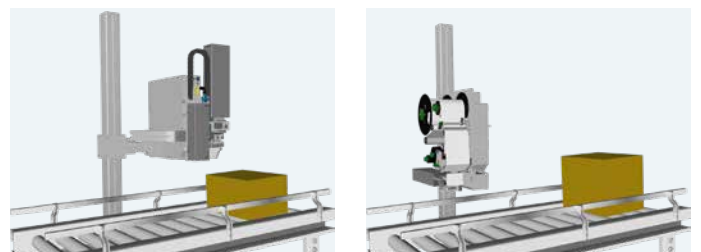

HERMES QL floor stands

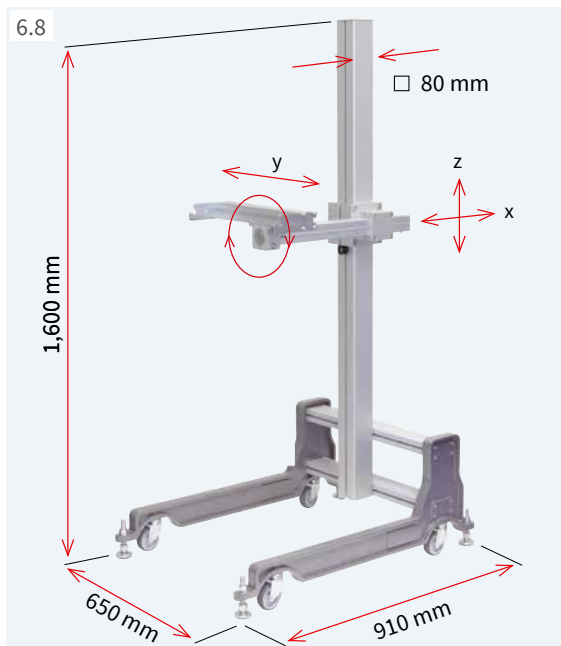


HERMES QL can be installed into a production line and aligned in three axes to an item to label. Pivoting is also possible.

Floor stand 1601

It benefits when operating HERMES Q in different production lines. Mobility is provided. At the place of operation, the floor stand can be fixed with the help of feet to adjust.


| Floor stand | | 1601 |
|--------------------------------|---------|------------------------|
| Base frame | | castors, leveling feet |
| Adjustment in height and depth | | screw clamping |
| Load at offset 500 mm | kg max. | 50 |
| Weight | kg | 36 |

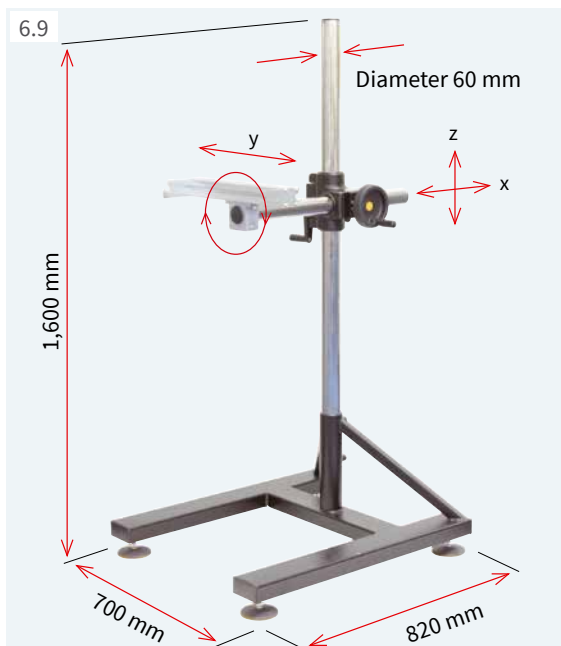

Floor stand 1602

It benefits if positions to apply labels are changing frequently in terms of heights and depths. HERMES QL can be aligned in directions x and z to a product using a toothed rack.

| Floor stand | | 1602 |
|-------------------------------|---------|--|
| Base frame | | leveling feet |
| Adjustment in height in depth | | toothed rack / crank toothed rack / handwheel |
| Load at offset 500 mm | kg max. | 50 |
| Weight | kg | 38 |

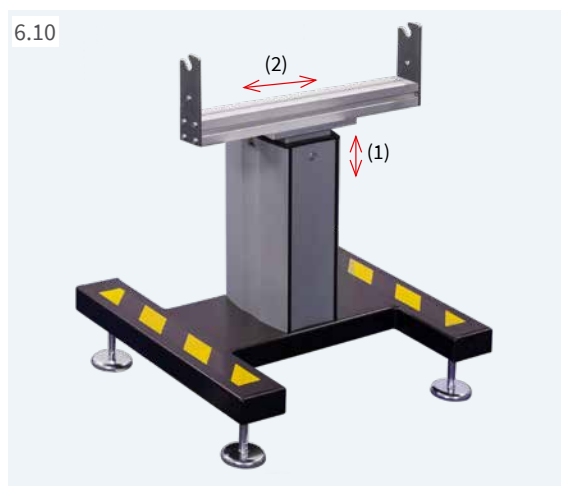

Floor stand 1201

for installing HERMES QL horizontally into a production line. Heights can be adjusted continuous using an integral spindle.


A unit to regulate compressed air can be assembled to the bracket, so can a warning light.

| Floor stand | | 1201 |
|---|------------------|-----------|
| Leveling feet | adjustable by mm | ± 15 |
| Load | kg max. | 75 |
| (1) Lower label margin to floor ¹⁾ | mm | 720 - 960 |
| (2) Depth along direction of transport | mm | ± 100 |
| Weight | kg approx. | 40 |

¹⁾ further dimensions upon request

HERMES QL delivery program

Label printers L

| Pos. | Item no. | Designation |
|------|---|--|
| 1.1 |  | 6012002 HERMES QL4.3L/200 label printer |
| | 6012000 HERMES QL4.3L/300 label printer | |

xxxxxxx.250 if HERMES QL provides options

Label printers R

| Pos. | Item no. | Designation |
|------|---|--|
| 1.1 |  | 6012012 HERMES QL4.3R/200 label printer |
| | 6012010 HERMES QL4.3R/300 label printer | |

xxxxxxx.250 if HERMES QL provides options

Scope of delivery

HERMES QL label printer
Type E+F power cable, 1.8 m
Connecting USB cable, 1.8 m
Instructions DE / EN





Provided online



<https://setup.cab.de/en>

Assembly instructions DE / EN / FR
Configuration manuals DE / EN / FR
Service manuals DE / EN
Spare parts lists DE / EN
Programming manuals EN
Windows printer drivers certified WHQL for
Windows 10 Server 2016
Windows 11 Server 2019
Server 2022
Apple Mac OS X printer drivers DE / EN / FR
Linux printer drivers DE / EN / FR
cablabel S3 Lite software
cablabel S3 Viewer
Database Connector




Wear parts

| Pos. | Item no. | Designation | dpi |
|------|---|--------------------------------------|-----|
| |  | 5977382.001 Print head 4.3 | 200 |
| | 5977383.001 Print head 4.3 | 300 | |
| |  | 6012025.001 DRL4 print roller | |
| |  | 6012095.001 Upper blade L | |
| | 6012096.001 Upper blade R | | |
| |  | 6012078.001 Cutter bar | |





















See current data also on the Internet:
www.cab.de/en/hermesql

Options

| Pos. | Item no. | Designation |
|------|---|---|
| 3.1 |  | 6012130 Cover 4L |
| | 6012140 Cover 4R | |
| 3.2 |  | 6010520.xxx 2 port Ethernet Switch 10/100 Mbit/s |
| 3.3 |  | 5954180.xxx DR4 print roller |

xxx - .250 assembled to a printer
.001 separate delivery








Accessories

| Pos. | Item no. | Designation |
|------|---|--|
| 2.1 |  | 5977370 SD memory card |
| 2.2 |  | 5977730 USB stick |
| 2.3 |  | 5978912 USB WLAN stick 2..4 GHz 802.11b/g/n |
| 2.4 |  | 5977731 USB WLAN stick with a rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac |
| 2.6 |  | 5970071 Product sensor, 3 pins |
| 2.7 |  | 5964300 Product sensor, 25 pins |
| 2.8 |  | 5917651 I/O interface plug, SUB-D, 25 pins |
| 2.9 |  | 6010560 Warning light |
| 2.10 |  | 6010186 External operation panel |
| |  | 5907718.850 Connecting USB cable, 1.8 m |
| |  | 5907730.850 Connecting USB cable, 3 m |
| |  | 5907750.850 Connecting USB cable, 5 m |
| |  | 5907760.850 Connecting USB cable, 11 m |
| |  | 5907765.850 Connecting USB cable, 16 m |
| 2.11 |  | 5948205 Label selection - I/O box |
| 2.12 |  | 5955710 TR2 hand switch |
| 2.13 |  | 5955711 Foot switch |
| 2.14 |  | 5550818 Connecting RS232-C cable, 9/9 pins, 3 m |

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee.

HERMES QL delivery program

Assembly assistance

| Pos. | Item no. | Designation |
|------|---|--|
| 6.1 |  5965940 | Adapter plate |
| 6.2 |  5958365 Profile 80 5965929 Profile 120 5971721 Profile 160 5987701 Profile 200 5987702 Profile 300 5987703 | Profile 40 Profile 80 Profile 120 Profile 160 Profile 200 Profile 300 |
| 6.3 |  5961203 | Base plate 500 x 255 mm |
| 6.4 |  5989277 | Base plate, xy stop and product sensor included |
| 6.5 |  5955685 | Bracket |
| 6.6 |  8914443 | Clamped joint designed for a 50 x 50 mm profile |
| 6.7 |  8914444 | Flanged joint designed for a 50 x 50 mm profile |

Floor stands

| Pos. | Item no. | Designation |
|------|---|------------------|
| 6.8 |  5970113 | Floor stand 1601 |
| 6.9 |  5970112 | Floor stand 1602 |
| 6.10 |  5972515 | Floor stand 1201 |

Label software








| Pos. | Part no. | Designation |
|---------|--|--|
| | Bundle | cablabel S3 Lite (download on cab.de/en) |
| 7.6 | 5588001 | cablabel S3 Pro, 1 WS |
| | 5588100 | cablabel S3 Pro, 5 WS |
| | 5588101 | cablabel S3 Pro, 10 WS |
| | 5588150 | cablabel S3 Pro, 1 additional licence |
| | 5588151 | cablabel S3 Pro, 4 additional licences |
| | 5588152 | cablabel S3 Pro, 9 additional licences |
| | 5588002 | cablabel S3 Print, 1 WS |
| | 5588105 | cablabel S3 Print, 5 WS |
| | 5588106 | cablabel S3 Print, 10 WS |
| | 5588155 | cablabel S3 Print, 1 additional licence |
| 5588156 | cablabel S3 Print, 4 additional licences | |
| 5588157 | cablabel S3 Print, 9 additional licences | |
| | in preparation | cablabel S3 Print Server |
| 7.10 | 9008486 | Programming manual EN, printed copy |

User languages

| Language | Assembly instructions | Operation panel | Windows driver | Service manual | cablabel S3 |
|------------------------|-----------------------|-----------------|----------------|----------------|-------------|
| European Union | | | | | |
| Bulgarian | | X | X | | X |
| Danish | X | X | X | | |
| German | X | X | X | X | X |
| Estonian | | X | X | | |
| Finnish | X | X | X | | |
| French | X | X | X | | X |
| Greek | | X | X | | |
| English | X | X | X | X | X |
| Italian | X | X | X | | X |
| Croatian | | X | X | | |
| Latvian | | X | X | | |
| Lithuanian | | X | X | | |
| Dutch | X | X | X | | |
| Polish | X | X | X | | X |
| Portuguese | X | X | X | | |
| Romanian | X | X | X | | |
| Swedish | X | X | X | | |
| Slovak | | X | X | | |
| Slovenian | X | X | X | | |
| Spanish | X | X | X | | X |
| Czech | X | X | X | | X |
| Hungarian | X | X | X | | |
| Europe (Non-EU) | | | | | |
| Macedonian | | X | X | | |
| Norwegian | | X | X | | |
| Russian | X | X | X | | X |
| Serbian | | X | X | | |
| Turkish | | X | X | | |
| Asia | | | | | |
| Chinese (simplified) | X | X | X | | X |
| Chinese (traditional) | X | X | X | | X |
| Japanese | | X | X | | |
| Korean | X | X | X | | X |
| Thai | | x | X | | |
| Middle East | | | | | |
| Arabian | | X | | | |
| Persian | | X | | | |


Delivery program of applicators

HQ linerless applicators L




| Pos. | Item no. | Designation | Item no. | Transfer modules | | |
|------|---|--|--|--|---|--|
| 4.1 |  5989285 5989286 5989287 5989288 | Stroke applicator Stroke applicator Stroke applicator Stroke applicator | HQ 4024L-200 HQ 4024L-300 HQ 4024L-400 HQ 4024L-600 | 5989301 5989302 5989303 Tamp-on pad, spring-mounted Tamp-on pad, spring-mounted Tamp-on pad, spring-mounted | 4024-3000 105 x 100 4024-3000 105 x 150 4024-3000 105 x 200 | |
| 4.3 |  5987520 5987521 5987522 5989343 | Front side applicator Front side applicator Front side applicator Front side applicator | HQ 3014L-200 HQ 3014L-300 HQ 3014L-400 HQ 3014L-600 | xxxxxxx xxxxxxx xxxxxxx | Tamp-on pad Tamp-on pad, spring-mounted Blow-on pad | 3014L-1100 W x H 3014L-3100 W x H 3014L-2100 W x H |
| 4.4 |  5987736 5987738 5987740 | Stroke blow applicator Stroke blow applicator Stroke blow applicator | HQ 4614L-200 HQ 4614L-300 HQ 4614L-400 | xxxxxxx | Blow-on pad | 4614L-2100 W x H |
| 4.5 |  5987534 5987535 5987536 5987537 | Stroke applicator Stroke applicator Stroke applicator Stroke applicator | HQ 4014L-200 HQ 4014L-300 HQ 4014L-400 HQ 4014L-600 | 5966147 5966148 5966149 5966150 xxxxxxx xxxxxxx xxxxxxx xxxxxxx xxxxxxx | Universal pad Universal pad Universal pad, spring-mounted Universal pad, spring-mounted Tamp-on pad Blow-on pad Tamp-on pad, spring-mounted Roll-on pad Corner-wrap pad | 4014L-1100 75 x 60 4014L-1100 90 x 90 4014L-3100 116 x 102 4014L-3100 116 x 152 4014L-11 F W x H 4014L-2100 W x H 4014L-3100 W x H 4014L-4100 W x H 4014L-5100 W x H / H |
| 4.6 |  5972870 5987552 5989291 | Vacuum belt applicator Vacuum belt applicator Vacuum belt applicator | HQ 5314L-2 HQ 5314L-3 HQ 5314L-4 | | | |
| 4.7 |  5987714 5989294 | Vacuum belt applicator Vacuum belt applicator | HQ 5414L-3 HQ 5414L-4 | | | |
| 4.8 |  5987564 | Air jet box 5 templates are included | HQ 6114L | 5984709.001 | Template 5 items are included in a pack unit | 6114 L/R |

xxxxxxx - customer-specific part no. subsequent to request



HQI InNo-Liner applicators L

| Pos. | Item no. | Designation | Item no. | Transfer modules | |
|------|--|--|--|--|---|
| 4.2 |  5989315 5989316 5989317 upon request | Stroke applicator Stroke applicator Stroke applicator Stroke applicator | HQI 4034L-200 HQI 4034L-300 HQI 4034L-400 HQI 4034L-600 | 5989301 5989302 5989303 Tamp-on pad, spring-mounted Tamp-on pad, spring-mounted Tamp-on pad, spring-mounted | 4024-3000 105 x 100 4024-3000 105 x 150 4024-3000 105 x 200 |

Applicator accessories








| Pos. | Item no. | Designation |
|------|---|--|
| 5.13 |  5964277.001 5964095.001 | Blow tube 2" Blow tube 4" |
| 5.14 |  6010880 6010881 | Unit L to regulate compressed air Unit R to regulate compressed air |
| 5.16 |  5984805 5984795 | Unit L to regulate compressed air, providing a shut-off valve Unit R to regulate compressed air, providing a shut-off valve |

Applicator options

| Pos. | Item no. | Designation |
|------|--|--|
| 5.17 |  596xxxx.212 | Pressure-reducing valve |
| | xxxx - applicator item no. | |
| 5.18 |  596xxxx.220 | Pressure-reduced applicator suitable for HQ 4014 / stroke 300 |
| | xxxx - applicator item no. | |


Delivery program of applicators

HQ linerless applicators R

| Pos. | Item no. | Designation | Item no. | Transfer modules |
|------|---|--|--|--|
| 4.1 |  5989295 5989296 5989297 5989298 | Stroke applicator Stroke applicator Stroke applicator Stroke applicator | HQ 4024R-200 HQ 4024R-300 HQ 4024R-400 HQ 4024R-600 | 5989301 5989302 5989303 Tamp-on pad, spring-mounted Tamp-on pad, spring-mounted Tamp-on pad, spring-mounted 4024-3000 105 x 100 4024-3000 105 x 150 4024-3000 105 x 200 |
| 4.3 |  5987526 5987527 5987528 5989354 | Front side applicator Front side applicator Front side applicator Front side applicator | HQ 3014R-200 HQ 3014R-300 HQ 3014R-400 HQ 3014R-600 | xxxxxxx xxxxxxx xxxxxxx Tamp-on pad Tamp-on pad, spring-mounted Blow-on pad 3014R-1100 W x H 3014R-3100 W x H 3014R-2100 W x H |
| 4.4 |  5987742 5987744 5987746 | Stroke blow applicator Stroke blow applicator Stroke blow applicator | HQ 4614R-200 HQ 4614R-300 HQ 4614R-400 | xxxxxxx Blow-on pad 4614R-2100 B x H |
| 4.5 |  5987538 5987539 5987540 5989363 | Stroke applicator Stroke applicator Stroke applicator Stroke applicator | HQ 4014R-200 HQ 4014R-300 HQ 4014R-400 HQ 4014R-600 | 5966140 5966141 5966142 5966143 xxxxxxx xxxxxxx xxxxxxx xxxxxxx xxxxxxx Universal pad Universal pad Universal pad, spring-mounted Universal pad, spring-mounted Tamp-on pad Blow-on pad Tamp-on pad, spring-mounted Roll-on pad Corner-wrap pad 4014R-1100 75 x 60 4014R-1100 90 x 90 4014R-3100 116 x 102 4014R-3100 116 x 152 4014R-11 F W x H 4014R-2100 W x H 4014R-3100 W x H 4014R-4100 W x H 4014R-5100 W x H / H |
| 4.6 |  5987708 5987556 5989357 | Vacuum belt applicator Vacuum belt applicator Vacuum belt applicator | HQ 5314R-2 HQ 5314R-3 HQ 5314R-4 | |
| 4.7 |  5987716 5989360 | Vacuum belt applicator Vacuum belt applicator | HQ 5414R-3 HQ 5414R-4 | |
| 4.8 |  5987565 | Air jet box 5 templates are included | HQ 6114R | 5984709.001 Template 5 items are included in a pack unit 6114 L/R |

xxxxxxx - customer-specific part no. subsequent to request

HQI InNo-Liner applicators R

| Pos. | Item no. | Designation | Item no. | Transfer modules |
|------|---|--|--|---|
| 4.2 |  5989325 5989326 5989327 auf Anfrage | Stroke applicator Stroke applicator Stroke applicator Stroke applicator | HQI 4034R-200 HQI 4034R-300 HQI 4034R-400 HQI 4034R-600 | 5989301 5989302 5989303 Tamp-on pad, spring-mounted Tamp-on pad, spring-mounted Tamp-on pad, spring-mounted 4024-3000 105 x 100 4024-3000 105 x 150 4024-3000 105 x 200 |

Germany

cab Produkttechnik GmbH & Co KG

Karlsruhe

Phone +49 721 6626 0

www.cab.de

France

cab Technologies S.à.r.l.

Niedermodern

Phone +33 388 722501

www.cab.de/fr

USA

cab Technology, Inc.

Chelmsford, MA

Phone +1 978 250 8321

www.cab.de/us

Mexico

cab Technology, Inc.

Juárez

Phone +52 656 682 4301

www.cab.de/es

Taiwan

cab Technology Co., Ltd.

Taipei

Phone +886 (02) 8227 3966

www.cab.de/tw

China

cab (Shanghai) Trading Co., Ltd.

Shanghai

Phone +86 (021) 6236 3161

www.cab.de/cn

Singapore

cab Singapore Pte. Ltd.

Singapore

Phone +65 6931 9099

www.cab.de/en

South Africa

cab Technology (Pty) Ltd.

Randburg

Phone +27 11 886 3580

www.cab.de/za

cab // 820 distribution and service partners in more than **80** countries