




Laser Marking



Tool Coding

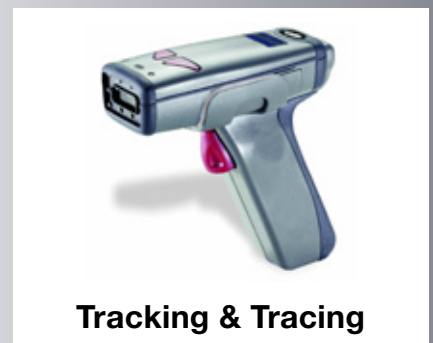

Tracking & Tracing

Laser - Tool - Coding - System TOOLMARK 100



Tool - Coding - System TOOLMARK 100

TOOLMARK100 enables you to mark and code tools made of steel or carbide (e.g. drills, millers), starting at a diameter of 4mm, with a precise and permanent Data Matrix Code.

Nevertheless the marking should contain code, text or graphics, the unique software application TOOLSTAR marks your parts in a simply way and provides an intuitional operator front end for single and batch processing.

Tools become marked non-interchangeable and can be tracked easily and fast using a hand-held code reader.

Amongst others TOOLMARK100 is applicable for surface technology, tool manufacturers, resharpening services, tooling management systems or just for identification in series production.

Technical Data

Laser Safety Housing	
Working Area l x w x h	980 x 980 x 460 mm
Base plate T-slot l x w	530 x 375 mm
Pitch	25 mm
F-Theta lens	160 254
Marking area mm	112 x 112 180 x 180
Workpiece height max. mm	370 210
Workpiece weight max.	25 kg (incl. carrier)
Laser protection window	100 x 200 mm
Z-Axis traversing range	500 mm
Position accuracy Z	0,02 mm
X-Axis traversing range	510 mm
Position accuracy X	0,02 mm
Repeatability ZX	+/- 0.05 mm
PLC	Siemens Simatic S7
Focusing equipment	pointing laser 650 nm / < 1 mW / Kl. 2
Aperture extraction system	DN 50
Interior light	low energy light bulb, 11 W
Operating door	pneumatic driven
Placement	machine mount Ø 80 mm
Mounting frame	2 x rack mount 19" 4HE
Dimension l x w x h	1120 x 1000 x 2280 (w/o pivot arm)
Chassis / colour	steel plate / RAL 7035
Net weight	405 kg
Weight operable installed	approx. 460 kg
Operating Panel	
LED-indicators	Power On Laser Ready Emission Mark in Progress Collective Error Door Closed
Push button On/Off	Controls On Air Supply Extraction On Light Pointing Laser
Push button	Close Door / Start
Push button up / down left / right	Z-Axis X-Axis
Interruptor	Emergency Stop
Key switch	Manual or Automatic Operation

Interfaces	
Marking laser system	FL10 / 20
Filtering devices	AF1/2/3/4
Interface USB	axis control
Interface RS232 / 485	laser-distance-sensor
Internal I/O interface	inputs / outputs
Status Monitoring	
Safety interlock circuits	closed
Collective failure	marking laser system
Filtering device	change of filter
Operating Data	
	LSG 230 V LSG 120 V
Voltage	220-240 V AC 100-140 V AC
Frequency	50/60 Hz
Fuse	16 A type B 15 A type B
Power consumption max.	3500 Watt 1750 Watt
Compressed air supply	4-6 bar (58-87 psi) oil free, dry
Operating temperature	+10 - +35°C
Air humidity	30 - 85% not condensing
Laser safety class	class 1
Approvals	CE
Content of Delivery	
Operating manual	
Main supply cable	
Connecting cable FL, length 3 m	
Connecting cable PC, length 3 m	
Connecting cable filtering device, length 3 m	
Pivot arm for LCD/TFT Monitor w/ Keyboard Tray	
Additional functionality, special options for air conditioning as well as workpiece carrier and accessories are available on request.	

Diode Pumped Ytterbium Fiber Laser

With the air cooled Ytterbium fiber lasers cab supplements the delivery program of high resolution, diode pumped marking lasers.

They mark on steel, aluminum, various plastics and many further materials with high beam quality and output power up to 20 watts.

The software cablase provides a graphical interface for real-time control or the COM interface for customized programming. cab offers solutions for integration into manufacturing lines, laser safety workstations as well foil and type plate marking systems.


Technical Data

Laser Source	FL10	FL 20
Max. cw power	10 Watt	20 Watt
Pulse energy	0.5 mJ	1 mJ
Laser type	ytterbium fiber laser, pulsed	
Cooling	air cooled	
Wavelength	1064 nm	
Beam quality M ²	< 1.8	
Pulse width	80 - 120 ns	
Pulse frequency	20 - 80 kHz	
Pilot laser	650 nm / < 1 mW / Class 2	
Length fiber connection	4.5 m	2.5 m
Laser safety class	class 4	
Scan head		
Mounting	horizontal / vertical	
Scanning speed	max. 5000 mm/s	
Weight	8 kg	
Dimension h x w x d	110 x 170 x 330 mm	
Control Unit		
Supply voltage / frequency	100 - 240 VAC / 50-60 Hz	
Power consumption	350 Watt	450 Watt
Fuse (230 V)	2.5 AT	
Fuse (110 V)	5 AT	
Weight	17 kg	
Dimension h x w x d	178 x 420 x 420 mm	
Ambient Conditions		
Operating temperature	+5 - +40 °C	
Air humidity	15 - 90 % not condensing	
Interfaces		
PC-Interfaces	PCI, TCP/IP	
Laser Control Interface for	System Ready, Start Marking Laser Emission, Shutter/Chamber Interlock	
Marking Software		
Hardware	min. Pentium IV-PC, 500 MHz, min.1GB RAM, CD-ROM-Disk, 2x PCI Slot (Version PCI), 150 MB free hard drive capacity, 10/100/1000 Ethernet-LAN RJ45,	
Operating Systems	Windows XP®, Windows 7®	

Font Types	
Font formats	All Windows TrueType Fonts, filled or as outline, laser specific Single-, Double and Tripple Line Fonts; all fonts can be freely scaled and „wobbled“.
Font alignments	Any alignment and font direction, radial marking.
Character width	Stretching and compressing possible.
Graphics	
Graphic objects	Line, circle, rectangle, polygon. Hatch and cross hatch for all basic graphic objects.
Graphic formats	PLT, DXF, BMP, JPG, PCX, WMF, EPS, TIF All graphic elements can be scaled, moved, rotated, grouped or mirrored. Special tools are available to tune, align and resize the objects.
Barcodes	
Linear Barcodes	2 of 5 Codabar Code 39, Code 93 EAN Code 128 UPC
2D-Barcodes	Data Matrix, ECC200, QRCode Barcodes are variable in height, module width and ratio. Tuning possibilities and Check Digit generation. Inverted marking possible. Inverted marking of code.
Additional Features of the Marking Software	
Serial number, date, time.	
Variable fields.	
Direct import of graphic data from Windows based applications.	
Programmable laser parameters.	
Process and parameter file saving.	
Control of external and digital inputs and outputs is implemented in the software.	
Additional axes (e.g. for lifting, rotating, linear axis) can be controlled.	
cablase provides a COM Automation Server enabling the user to control the laser from any other user interface developed by e.g. Visual Basic, Borland Builder, provided the programming language has ability to communicate to COM-objects.	


Plano Spherical Lens F-Theta 100

Working Distance mm	138±2
Marking Area mm	60 x 60
Spot Diameter µm	~25
^= Resolution dpi	1000




160

Working Distance mm	204±2
Marking Area mm	112 x 112
Spot Diameter µm	~35
Resolution dpi	725

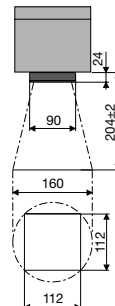

254

Working Distance mm	370±2
Marking Area mm	180 x 180
Spot Diameter µm	~50
Resolution dpi	500

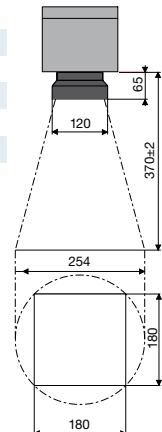

AF1



Exhaust and Filtering Device

Part No.	Device
5906614	Filtering Device AF1 230V
5906615	Filtering Device AF1 120V

Part No.	Accessories
5906616	Filter Set AF1
5906617	Pre-Filter AF1 305x305
5906618	Filter For Suspended Matter AF1 305x305x78
5906619	Activated Carbon Filter 300x300x115
5905818	Suction Hose 50 / 2.5 m
5906682	Connecting Sleeve Extraction Hose d=50
5550888	Cabel 1:1, 15/15-pins, 3m

Technical Data

Device Type		AF1	
Dimension l x w x h	355 x 355 x 655 mm		
Space requirement for filter change l x w x h	700 x 700 x 1000 mm		
Weight without filter equipment approx.	29 kg		
IP protection level	IP 42		
Suction capacity max.	100 - 320 m³/h		
Vacuum max.	12500 Pa		
Number of fans	1		
Electrical Power Supply Filtering Device			
Supply voltage	230 V AC	120 V AC	
Frequency	50 / 60 Hz		
Power consumption	1.2 kW		
Rated current	7.2 A	10 A	
Fuse	16 A	15 A	
Operating temperature	+5 - +35 °C		
Storage temperature	+5 - +40 °C		
Maximum installation altitude	2000 m		
Chassis material	steel plate powder coated		
Colour	RAL 7035		
Noise Level at Filtering Device			
Continuous sound pressure level	82 dB (A)		
Acoustic power level to CE DIN 45635-3 1m	67 dB (A)		
Filter Equipment			
Total surface area of particle filter approx.	2.20 m²		
Total weight of gasfilter approx.	6.00 kg		
Total weight of filter equipment approx.	8.20 kg		
Automation Interface			
Status signal	Device OK		
Status signal	Error Filter 100%		
Switching contact	Device ON		
Further application specific filtering devices with increased suction capacity and additional filter equipment are available on request.			

Delivery Program Laser Marking System LSG100-TM

Part No.	Device
5528006.xxxx	LSG100-TM-FLxx

Part No.	Accessories
5570160	DMC Handheld Reader DataMan 7500 (USB)
5570161	DMC Handheld Reader DataMan 7550 (Bt.)
5901660	Protective Plastic Sheeting WetEx Keyboard
5905994	Transport Rollers Set

All specifications about delivery, design and technical data are given to the best of our current knowledge and are subject to change without prior notice. **For more information go to www.cab.de**