

THERMAL TRANSFER RIBBON


Exclusively designed for cab Printers



R11

RESIN TRANSFER RIBBON


- Good printing quality
- Competitiveness
- High versatility

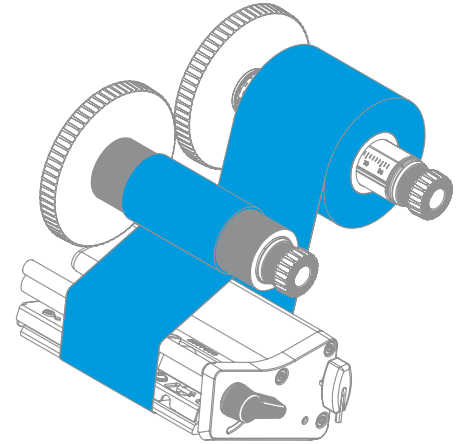


TECHNICAL SPECIFICATIONS

BLACKNESS


Macbeth D19C (Optical Density by Reflection)



90° BARCODE

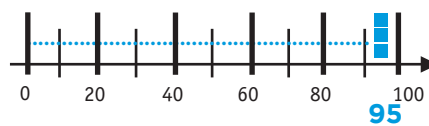


SHARPNESS

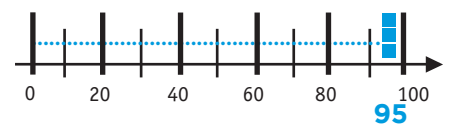


LABEL COMPATIBILITY

Coated papers	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	PP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Glossy coated	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	PE	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
				PET	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>


PRINTING SPEED

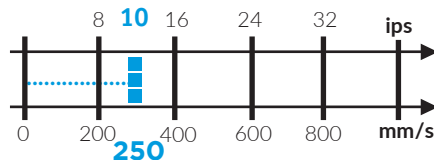


PRINTHEAD ENERGY




SMUDGE RESISTANCE

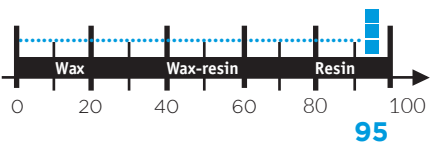

HEAT RESISTANCE

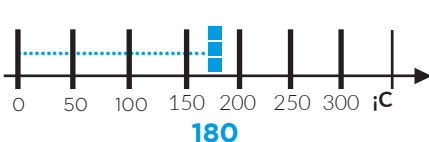

SOLVENT RESISTANCE

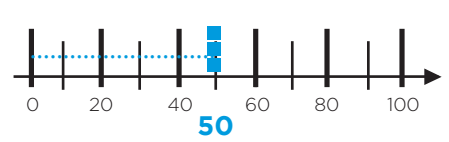

CERTIFICATIONS

- REACH/SVHC 1907/2006/EC
- Food Contact 1935/2004/EC
- Heavy metals 2011/65/EU
- California Proposition 65
- UL 969

scan QR
for more information
cab.de/en/ttr

