

Status: 03/2025

**cab**  
*we identify more*



Label printers  
for printing on both sides  
of a material

**XD Q**  
Made in Germany

# Label printers

for printing on both sides of a material

1.1



## **XD Q providing a tear-off plate**

All materials wound on a roll or a reel can be printed, so can fanfold ones.

Label printer		XD Q4/300	XD Q4.2/600
Print resolution	dpi	300	600
Print speed	mm/s max.	150	100
Print width	mm max.	105.7	54.1
Width of a material	mm max.	114	114

1.2



## **XD Q providing an UHF RFID module with read / write antennas**

The module is installed into the chassis, the antenna directly on the print head. RFID tags are read and written just before the labels are printed. In the event of errors, labels are indicated invalid.

provided upon request

## In detail



- **300 dpi** if printing as wide as 105.7 mm  
**600 dpi** if printing no more than **54.1 mm** wide, using a DR4-M60 print roller  
Print heads designed for 300 dpi and such for 600 dpi are not interchangeable on the unit.
  - **Heating** can be assigned separately to each print head.
  - If **printing only on the top of a material** using print head 2, print head 1 is automatically lifted and the ribbon is stopped by an electromechanical brake.
  - **Guiding materials in centered position** results in precise print images in particular with slim continuous materials are in use. The width of a material is set with the help of a spindle.
  - **Automated ribbon saving** is provided on print head 1 when printing on the bottom of a material. The print head is lifted and the ribbon is stopped during material feed.
  - **Continuous print images** when cutting or perforating labels at no backfeed.
  - **Optimized printing**, so that multiple print jobs can be printed seamless and without loss of labels.
  - **CSQ cutters** and **PSQ perforation cutters**
  - **A separator** is part of the chassis. It separates continuous material reliably from a ribbon and improves the accuracy of feeding.  
Type of transport roller:  
Steel is a standard if printing on textile materials.  
Rubber is an option with shrink tubes.
- A transport roller can be pivoted for material changeover.
- **Find documentation** on the Internet.  
DVDs are no longer part of delivery.

Textile tapes  
Cardboard labels  
Identification strips



Cable marking  
Shrink tubes continuous  
or ready for use



Labels  
Printing only on the top of a material  
using print head 2



# Technical data

● typical ■ standard □ option

Label printer			XD Q4/300	XD Q4.2/600
Guidance of materials			centered	centered
Print method	Thermal transfer		●	●
Print resolution	dpi		300	600
Print speed	mm/s max.		150	100
Print width	mm max.		105.7	54.1
Print length	mm max.		3,000	1,500
Automated ribbon saving			●	●
<b>Materials<sup>1)</sup></b>				
Paper, cardboard, synthetics PET, PE, PP, PI, PVC, PU, acrylate, Tyvec			●	
Shrink tube	ready for use		●	
	continuous, pressed		●	
Textile tape			●	
Finishing	Roll, fanfold		●	
	Roll diameter	mm max.	300	
	Core diameter	mm	38.1 - 76	
	Winding		outside or inside	
Label	Width	mm	10 - 110	
	Height	mm at least	20	
	Thickness	mm max.	0.1	
Liner	Width	mm	14 - 114	
	Thickness	mm	0.03 - 0.16	
Continuous	Width	mm	4 - 114	
	Thickness	mm	0.03 - 0.5	
	Weight (cardboard)	g/m <sup>2</sup> max.	300	
Shrink tube	Width	ready for use mm max.	114	
		continuous, pressed mm	4 - 85	
	Thickness	mm max.	1.1	
Ribbon <sup>2)</sup>	Color side		outside or inside	
	Roll diameter	mm max.	80	
	Core diameter	mm	25.4	
	Length	m max.	450	
	Width	mm max.	114	
<b>Printer dimensions, weight</b>				
Width x Height x Depth / Weight			mm/kg	
			248 x 395 x 594 / 21	
<b>Label sensors, position indicators</b>				
Transmissive sensor		detecting	labels, punch marks, materials ending, print marks on translucent materials	
Reflective sensor	from below or top	detecting	labels, materials ending, print marks on non-translucent materials	
Sensor distance	centre to locating edge	centered mm	0 - 55	
Material passage		mm max.	2	
<b>Electronics</b>				
Processor, 32 bit clock rate		MHz	800	
RAM		MB	256	
IFFS		MB	50	
Port for plugging a SD memory card (SDHC, SDXC)		GB max.	512	
Battery for indicating time and date, real-time clock			■	
Data kept in memory (e.g. serial numbers) when power turns off			■	
<b>Interfaces</b>				
RS232-C 1,200 to 230,400 baud / 8 bit			■	
USB 2.0 Hi-Speed device to plug a PC			■	
Ethernet 10/100 Mbit/s IPv4 and IPv6			LPD, RawIP printing, SOAP web service, OPC UA, WebDAV DHCP, HTTP/HTTPS, FTP/FTPS, TIME, NTP, Zeroconf, SNMP, SMTP, VNC	
2 USB hosts on the control panel, 2 USB hosts on the back of a unit			Service key, USB stick, USB WLAN stick, USB WLAN stick with a rod antenna, keyboard, barcode scanner, external control panel	
USB host, 24 VDC, for peripheral plugging			■	
Digital I/O interface			□	

<sup>1)</sup> Specifications are standards. Operations including small, slim, thick or stiff materials need testing, so do strongly adhesive labels.

<sup>2)</sup> A ribbon should be at least as wide as the liner material.

# Technical data

■ standard □ option

Operating data	
Voltage	100-240 VAC, 50/60 Hz, PFC
Consumption of power	<10 W in standby / 100 W in typical operation / max. 200W
Temperature / Operation	+5 - 40°C / 10 - 85 %, not condensing
humidity	Stock 0 - 60°C / 20 - 85 %, not condensing
	Transport -25 - 60°C / 20 - 85 %, not condensing
Approvals	CE, UKCA, FCC Class A, ICES-3, cULus, CB, CCC, BIS, BSMI, KC-Mark, Mexico Reg.
Control panel	
Color LCD touchscreen	Diagonal " 4.3 Resolution Width x Height px 272 x 480
Setup options	
Print Labels Ribbon Tear off Cut Interfaces Error	Region: - Language - Country - Keyboard - Time zone Time Display: - Brightness - Power saving mode - Orientation Interpreter
Status bar	
Receive data Record datastream Warning to a ribbon ending SD memory card plugged USB stick plugged	WLAN Ethernet USB slave Time
Controls	
Ribbon 1/2 - Winding - Prior warning - End of ribbon Running out of material	Print head 1/2 - Voltage - Temperature - open Peripheral error
Test routines	
System diagnostics	upon startup, detection of print head included
Information display, test printout, analysis	Status printout Test grid Fonts list Label profile List of units List of events WLAN status Monitor mode
Status reports	- Printout of print durations, running hours, etc. - Status of a unit requested by software command - Display of errors related to a network, barcode or peripheral device, as well as links missing
Fonts	
Integral	5 bitmap fonts: 12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B 7 vector fonts: AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold
For storing	TrueType fonts
Sets of characters	Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869 EBCDIC 500 ISO 8859-1 to -10 and -13 to -16 WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Chinese, simplified Chinese, traditional Thai Cyrillic Greek Latin Hebrew Arabic

Fonts	
Bitmap	1 mm to 3 mm wide and high Zoom factors 2 to 10 0°, 90°, 180°, 270° orientations
Vector / TrueType	0.9 mm to 128 mm wide and high Continuous zoom 360° orientation in steps of 1°
Styles	bold, italic, underlined, outline, inverse - depending on the font type
Character spacing	proportional or monospace
Graphics	
Elements	lines, arrows, rectangles, circles, ellipses - filled or gradient
Formats	PCX, IMG, BMP, TIF, MAC, GIF, PNG
Codes	
1D barcodes (linear)	Code 39, Code 93 Interleaved 2/5 Code 39 Full ASCII Ident and routing code of Deutsche Post Code 128 A, B, C EAN 8, 13 EAN/UCC 128/GS1-128 EAN/UPC Appendix 2 EAN/UPC Appendix 5 FIM HIBC Codabar JAN 8, 13 MSI Plessey Postnet RSS 14 UPC A, E, E0
2D codes, stacked codes	DataMatrix DataMatrix Rectangle Extension QR code Micro QR code rMQR code GS1 QR code GS1 DataMatrix GS1 Digital Link (QR and DataMatrix) PDF 417 Micro PDF 417 UPS Maxicode GS1 DataBar Aztec Codablock F Dotcode RSS 14 truncated, limited, stacked, omni-directional All codes may vary in height, modular width and ratio. 0°, 90°, 180°, 270° orientations Feasibility of check digits, plain text printouts and start/stop coding depends on the type of code.
Software	
Label software	cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print
Running also with	CODESOFT Loftware Spectrum NiceLabel BarTender
Stand-alone operation	■
Windows printer drivers certified WHQL for	Windows 10 Server 2016 Windows 11 Server 2019 Server 2022
Apple printer drivers	Mac OS X 10.6 or any later release
Linux printer drivers	CUPS 1.2 or any later release
Programming	JScript printer language abc Basic Compiler ZPL II (datastream be tested in advance)
Integration	SAP Database Connector
Administration	Printer control Configuration on the Intranet and Internet

Free and Open Source software in cab products:  
[www.cab.de/opensource](http://www.cab.de/opensource)

## Accessories

Products are plugged or screwed to a printer by a customer.

2.1		<b>SD memory card</b>
2.2		<b>USB stick</b>
2.3		<b>USB WLAN stick</b> 2.4 GHz 802.11b/g/n Hotspot mode or infrastructure mode
2.4		<b>USB WLAN stick with a rod antenna for extended range of operation</b> 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac Hotspot mode or infrastructure mode
2.6		<b>I/O interface plug</b> SUB-D, 25 pins All control signals connect to the I/O interface using clamping screws.

## Options

Parts or units to perform special functions are assembled to a printer in addition to or instead of standards. If order implies options be assembled ex factory, the part numbers of such printers and options are added by .250. Options delivered separately are added by .001.

2.7		<b>Digital I/O interface</b> Labeling is triggered via a PLC, a sensor or a hand switch. Status reports and errors are displayed simultaneously.
2.9		<b>Adapter 40/100</b> for picking up label rolls with a core diameter of 100 mm  One adapter is sufficient if processing materials no more than 50 mm wide.
2.10		<b>Slim print rollers</b> They allow for accurate print results with small materials and ribbons.  <b>Synthetic rubber</b> for highly accurate print images  <b>Type materials as wide as</b> DR4-M30 30 mm DR4-M60 60 mm DR4-M80 80 mm  <b>Silicone</b> preferred for textile operations and for extralong lifecycles DRS4-M35 35 mm DRS4-M50 50 mm
2.11		<b>Standard print rollers</b> <b>Type materials as wide as 120 mm</b> DR4 Synthetic rubber DRS4 Silicone
2.12		<b>Transport rollers for separators</b> <b>Type materials as wide as 120 mm</b> TR4 120 mm (synthetic rubber) preferred for shrink tube operations TR4-M60 60 mm preferred for textile operations

## Rewinding



**External ER4 rewriter**, power supply built in

Label webs may be wound outside or inside. They are wound consistently and tight by electronic control, with a pendulum arm.

External rewriter		ER4/210	ER4/300
Width of a material	mm max.	120	
Roll diameter	mm max.	205	300
Tightening axle	core diameter in mm	76	
Winding		outside or inside	
Voltage		100 - 240 V, 50/60 Hz	
<b>Adapter kit</b>		<input type="checkbox"/>	<input type="checkbox"/>

# Cutting, perforating, stacking

3.1  
CSQ 402



3.2  
PSQ 403



5.1  
CU400



5.2  
PCU400



5.3  
ST400 M



## Cutters and perforation cutters

Paper, cardboard, textile and synthetic materials can be cut resp. perforated, so can shrink tubes, continuous or ready for use.

Differences between CSQ and CU resp. PSQ and PCU cutters:

- CSQ / PSQ can be pivoted to simplify material changeover.
- CSQ / PSQ are cutting twice as fast as CU /PCU cutters.
- CU / PCU cutters are still recommended with textile operations.

If perforating with a PSQ, six off-cuts remain at the center, each at a distance of 2.5 mm. At the left and right of a perforation, the material is entirely cut. If perforating with a PCU, there is off-cutting along the entire width.

Cutter	CSQ 402	PSQ 403	CU400	PCU400
<b>Perforation cutter</b>				
Material:				
Width mm max.	114		114	85
Passage height mm max.	2.0			2.0
Weight (cardboard) gr/m <sup>2</sup> max.	300			300
Thickness mm max.	1.1			1.1
Perforation:				
Distance between off-cuts mm	-	2.5	-	2.5
Off-cut width mm	-	0.4	-	0.5
Number of off-cuts	-	6	-	48
Cutting length mm at least	10	10	5	5
Perforation length mm at least	-	3	-	5
Tray Materials as wide as mm	100	100	100	100
Performance cuts/min at use of material 1 mm high, no backfeed	200		100	
Controls	no final cutter position			
	cutter cover removed		-	

## ST400 M stacker providing a cutter

Printed materials can be cut and then collected.

Print jobs stop if the maximum number of labels have been collected. Limitations may occur with stiff or curved materials. cab recommends to have such operations tested.

Stacker providing a cutter	ST400 M
Material	
Passage width mm	20 - 100
Passage height mm max.	1.2
Weight (cardboard) gr/m <sup>2</sup>	60 - 300
Thickness mm	0.05 - 0.8
Cutting length mm	20 - 150
Performance cuts/min at use of material 1 mm high, no backfeed	100
Limit of collecting mm max.	100
Controls:	no final cutter position, paper jam, stacker cover open, limit of collecting


## Support table - label W x H

The table and the protective cover are adapted to the size of a label. Please request individually.

## cablabel S3 software

### Design, print, administrate

cablabel S3 opens up the full potential of cab devices. Defining a label is first. Modular design adapts cablabel S3 to requirements step by step. Plug-ins are embedded. Native JScript programming, for example, is supported by the JScript Viewer. The designer user interface and JScript codes synchronize in real time. Optional features can be integrated, such as the Database Connector or barcode verifiers.

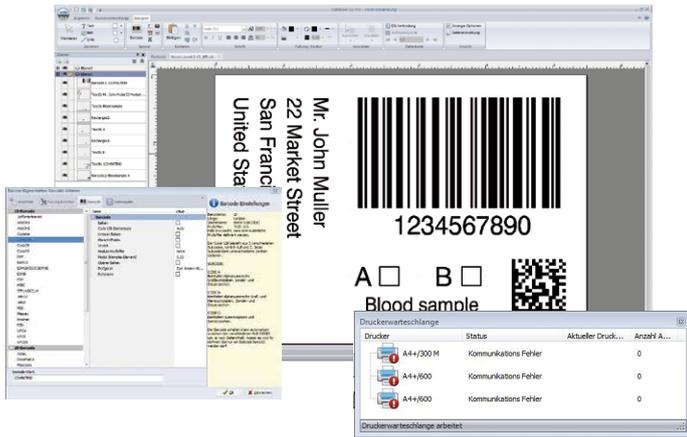

See further information on [www.cab.de/en/cablabe](http://www.cab.de/en/cablabe)

## Stand-alone operation

This operating mode enables a printer select and print labels while not connected to a host system. Labels can be designed using software such as cablabel S3 or a text editor on a PC. Label formats, texts, graphics and data of a database can be stored on a memory card, a USB stick or a printer's IFFS memory. Only variable data are sent by a keyboard, a barcode scanner, a scale or any other host system to a printer, or be recalled by the Database Connector from a host and printed.



## Printer control

### Drivers



cab provides drivers to control a printer with software other than cablabel S3.



Free download on [www.cab.de/en/support](http://www.cab.de/en/support)



### Programming

#### JScript

cab printers embed JScript language. Download free manual on [www.cab.de/en/programming](http://www.cab.de/en/programming)



#### abc Basic Compiler

Integral to the firmware, abc in addition to JScript enables advanced programming before data are edited for printout. For example, external printer languages can be replaced without intervening in a print job in progress. Data may be imported as well from other systems such as scales, barcode scanners or PLC.

### Connecting to SAP®

Labels can be printed from SAP<sup>1)</sup> on cab devices and systems. There are various methods:

- Printing with SAPscript
- Printing with SmartForms
- Printing with Adobe Interactive Forms

See instructions in detail on [www.cab.de/en/sap](http://www.cab.de/en/sap)

### Database Connector



Printers in a network may access data from a ODBC / OLEDB database and print it on labels. Data can be rewritten to a database while print jobs are in progress.

## Printer administration

### Configuration on the Intranet und Internet



Integral HTTP / FTP servers enable a printer be controlled or configured, firmware be updated and memory cards be administrated using standard applications such as a web browser or a FTP client. Administrators and operators on behalf of SNMP / SMTP are notified of states, alerts and errors by email or SNMP datagrams. Time and date are synchronized by a time server.

## OPC UA



All the latest cab printers have been designed ready for interacting with machines and components of different manufacturers in industrial plants. An OPC UA server is part of the firmware.

See further information on [www.cab.de/en/opcua](http://www.cab.de/en/opcua)

<sup>1)</sup> SAP and associated logos are trademarks or registered trademarks of SAP SE.

# Delivery program

## Label printers

Pos.	Item no.	Designation
1.1	6011500	XD Q4/300 label printer
	6011505	XD Q4.2/600 label printer

xxxxxxx.250 if XD Q provides options

Pos.	Item no.	UHF RFID (upon request)
1.2	xxxxxxx.407	UHF RFID OM module for - XD Q4/300 - XD Q4/300 with a CSQ 402 cutter, tray included - XD Q4/300 with a PSQ 403 perforation cutter, tray included

### Scope of delivery

Label printer  
Type E+F power cable, 1.8 m  
Connecting USB cable, 1.8 m  
Instructions DE / EN

### Provided online



Instructions  
Configuration manuals DE / EN / FR  
Service manuals DE / EN  
Spare parts lists DE / EN  
Programming manual EN  
Windows printer drivers certified WHQL for  
Windows 10 Server 2016  
Windows 11 Server 2019  
Server 2022  
Apple Mac OS X printer drivers DE / EN / FR  
Linux printer drivers DE / EN / FR  
cablabel S3 Lite software  
cablabel S3 Viewer  
Database Connector

<https://setup.cab.de/en>

## Wear parts

Pos.	Item no.	Designation
	5987330.001	Print head 2/600
	5987089.001	Print head 4/300
		See 'options' for print and transport rollers

## Accessories

Pos.	Item no.	Designation
2.1	5977370	SD memory card
2.2	5977730	USB stick
2.3	5978912	USB WLAN stick 2.4 GHz 802.11b/g/n
2.4	5977731	USB WLAN stick with a rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac
2.6	5917651	I/O interface plug SUB-D, 25 pins

## Options

Pos.	Item no.	Designation
2.9	5959622.xxx	Adapter 40/100
2.7	5551447.xxx	Digital I/O interface
2.10	5953700.001	DR4-M30 print roller
	5953701.001	DR4-M60 print roller
	5953702.001	DR4-M80 print roller
2.11	5977813.001	DRS4-M35 print roller
	5977812.001	DRS4-M50 print roller
2.11	5954180.001	DR4 print roller
	5954985.001	DRS4 print roller
2.12	6011614.001	TR4 transport roller
	6011615.001	TR4-M60 transport roller

.xxx - .250 assembled to a printer  
.001 separate delivery  
resp. spare part

## Cutting, perforating, stacking, rewinding

3.1	5984565.xxx	CSQ 402 cutter, tray included
3.2	5984130.xxx	PSQ 403 perforation cutter, tray included
5.1	5978900	CU400 cutter, tray included
5.2	5978901	PCU400/2,5 perforation cutter, tray included
5.3	5541599	ST400 M stacker, cutter included
	55xxxxx	Support table, label W x H order-specific item no.
6.1	5948100	External ER4/210 rewinder
	5946090	External ER4/300 rewinder
6.2	6011757	X series adapter kit

.xxx - .250 assembled to a printer



See current data on  
[www.cab.de/en/xdq](http://www.cab.de/en/xdq)

# Delivery program

## Label software

Pos.	Item no.	Designation
11.7	Bundle	cablabel S3 Lite (download on cab.de/en)
	5588001	cablabel S3 Pro 1 WS
	5588100	cablabel S3 Pro 5 WS
	5588101	cablabel S3 Pro 10 WS
	5588150	cablabel S3 Pro 1 additional licence
	5588151	cablabel S3 Pro 4 additional licences
	5588152	cablabel S3 Pro 9 additional licences
	5588002	cablabel S3 Print 1 WS
	5588105	cablabel S3 Print 5 WS
	5588106	cablabel S3 Print 10 WS
	5588155	cablabel S3 Print 1 additional licence
	5588156	cablabel S3 Print 4 additional licences
	5588157	cablabel S3 Print 9 additional licences
	in preparation	cablabel S3 Print Server
	11.10	9008486

Scopes of delivery, designs and technical data correspond to the date of this publication. They are subject to change. Catalog data do not represent any warranty or guarantee.

## User languages

Language	Instruc- tions	Control panel	Windows driver	Service manual	cablabel S3
<b>European Union</b>					
Bulgarian	X	X	X		X
Danish	X	X	X		
German	X	X	X	X	X
Estonian	X	X	X		
Finnish	X	X	X		
French	X	X	X		X
Greek	X	X	X		
English	X	X	X	X	X
Italian	X	X	X		X
Croatian	X	X	X		
Latvian	X	X	X		
Lithuanian	X	X	X		
Dutch	X	X	X		
Polish	X	X	X		X
Portuguese	X	X	X		
Romanian	X	X	X		
Swedish	X	X	X		
Slovak	X	X	X		
Slovenian	X	X	X		
Spanish	X	X	X		X
Czech	X	X	X		X
Hungarian	X	X	X		
<b>Europe (Non-EU)</b>					
Macedonian	X	X	X		
Norwegian	X	X	X		
Russian	X	X	X		X
Serbian	X	X	X		
Turkish	X	X	X		
<b>Asia</b>					
Chinese (simplified)	X	X	X		X
Chinese (traditional)	X	X	X		X
Japanese	X	X	X		
Korean	X	X	X		X
Thai	X	X	X		
<b>Middle East</b>					
Persian		X			
Arabian		X			

# Overview of cab products

Label printers  
**MACH1, MACH2**



Label printers  
**EOS 2**



Label printers  
**EOS 5**



Label printers  
**MACH 4S**



Label printers  
**SQUIX 2**



Label printers  
**SQUIX 4**



Label printers  
**SQUIX 6.3**



Label printers  
**SQUIX 8.3**



Label printers  
**XD Q double-sided**




Label printers  
**XC two-colored**



Print and apply systems  
**HERMES Q**



Print and apply systems  
**Hermes C two-colored**



Tube labeling systems  
**AXON 1**



Print modules  
**PX Q**



Labels and ribbons



Label software  
**cablabel S3**



Label dispensers  
**HS, VS**



Labeling heads  
**IXOR**



Marking lasers  
**XENO 4**



Laser marking systems



Germany  
**cab Produkttechnik GmbH & Co KG**  
Karlsruhe  
Phone +49 721 6626 0  
[www.cab.de](http://www.cab.de)

France  
**cab Technologies S.à.r.l.**  
Niedermodern  
Phone +33 388 722501  
[www.cab.de/fr](http://www.cab.de/fr)

USA  
**cab Technology, Inc.**  
Chelmsford, MA  
Phone +1 978 250 8321  
[www.cab.de/us](http://www.cab.de/us)

Mexico  
**cab Technology, Inc.**  
Juárez  
Phone +52 656 682 4301  
[www.cab.de/es](http://www.cab.de/es)

Taiwan  
**cab Technology Co., Ltd.**  
Taipei  
Phone +886 (02) 8227 3966  
[www.cab.de/tw](http://www.cab.de/tw)

China  
**cab (Shanghai) Trading Co., Ltd.**  
Shanghai  
Phone +86 (021) 6236 3161  
[www.cab.de/cn](http://www.cab.de/cn)

Singapore  
**cab Singapore Pte. Ltd.**  
Singapore  
Phone +65 6931 9099  
[www.cab.de/en](http://www.cab.de/en)

South Africa  
**cab Technology (Pty) Ltd.**  
Randburg  
Phone +27 11 886 3580  
[www.cab.de/za](http://www.cab.de/za)

**cab // 820** distribution and service partners in more than **80** countries

