


11 SMD Pin Connector Pitch 2.54 mm Round contact plug Ø 0.47 mm

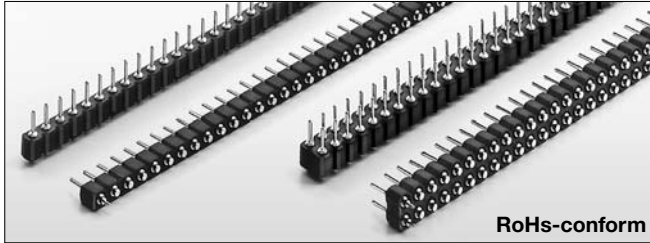

Material typical CuZn alloy
Surface 2-3 µm nickel, 5 µm tin, 0,15 µm gold
Insulator body Thermopl. polyester glass fiber reinforced, UL 94V0
Operation temper. -55 up to 125 °C
Solder temperature from 235°C acc. IEC 68-2-54 Ta
Solder heat resist. up to 260°C 10 sec. acc. IEC 68-2-20 Tb
Rated voltage 100 V_{RMS} / 150 VDC
Insulation resistance > 10¹⁰ Ω
Air and creepage distance > 1.0 mm
Moisture sensibility level (MSL) J-STD-020C Level 1

	A	Pins	5 µm tin Sn100	0.15 µm gold
Type 1 	81.1	32	1313437	1312476
We deliver the pin connectors in every required number of poles.				
Type 1 	81.1	64	1313232	1312477
We deliver the pin connectors in every required number of poles.				
Type 2 	81.1	32	1313862	1312478
We deliver the pin connectors in every required number of poles.				
Type 2 	40.5 81.1	32 64	1313321 1313864	1313027 1312479
We deliver the pin connectors in every required number of poles.				